

Features

- Ultra High Efficiency (Up to 93%)
- Full Power at 70-100% Max Current (Constant Power)
- DALI Dimmable and Dim-to-Off
- Standby Power ≤ 1 W
- Input Surge Protection: 4kV line-line, 6kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output
- Suitable for Independent Use



Description


The EUD-240SxxxBV series is a 240W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. Created for high bay, high mast, arena and roadway lights, it provides a dim-to-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range	Full-Power Current Range (1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Power Factor		Model Number (4)
							120Vac	220Vac	
70-1000mA	700-1000mA	700 mA	90~305 Vac/ 127~250 Vdc	72~343Vdc	240 W	93.0%	0.99	0.96	EUD-240S100BV
105-1500mA	1050-1500mA	1400 mA	90~305 Vac/ 127~250 Vdc	50~229Vdc	240 W	93.0%	0.99	0.96	EUD-240S150BV
154-2200mA	1540-2200mA	2100 mA	90~305 Vac/ 127~250 Vdc	33~156Vdc	240 W	93.0%	0.99	0.96	EUD-240S220BV
224-3200mA	2240-3200mA	2800 mA	90~305 Vac/ 127~250 Vdc	23~107Vdc	240 W	92.5%	0.99	0.96	EUD-240S320BV ⁽⁵⁾
322-4600mA	3220-4600mA	4200 mA	90~305 Vac/ 127~250 Vdc	16 ~ 75Vdc	240 W	92.5%	0.99	0.96	EUD-240S460BV ⁽⁵⁾
462-6600mA	4620-6600mA	4900 mA	90~305 Vac/ 127~250 Vdc	11 ~ 52Vdc	240 W	92.0%	0.99	0.96	EUD-240S660BV ⁽⁵⁾

- Notes:** (1) Output current range with constant power at 240W
 (2) Certified voltage range: 100-240Vac or 127-250Vdc (except CCC and KS)
 (3) Measured at a 220Vac input with 70% maximum output current and 100% maximum output voltage.
 (4) All the models are certificated to KS, except EUD-240S100BV and EUD-240S150BV
 (5) SELV output

I-V Operating Area

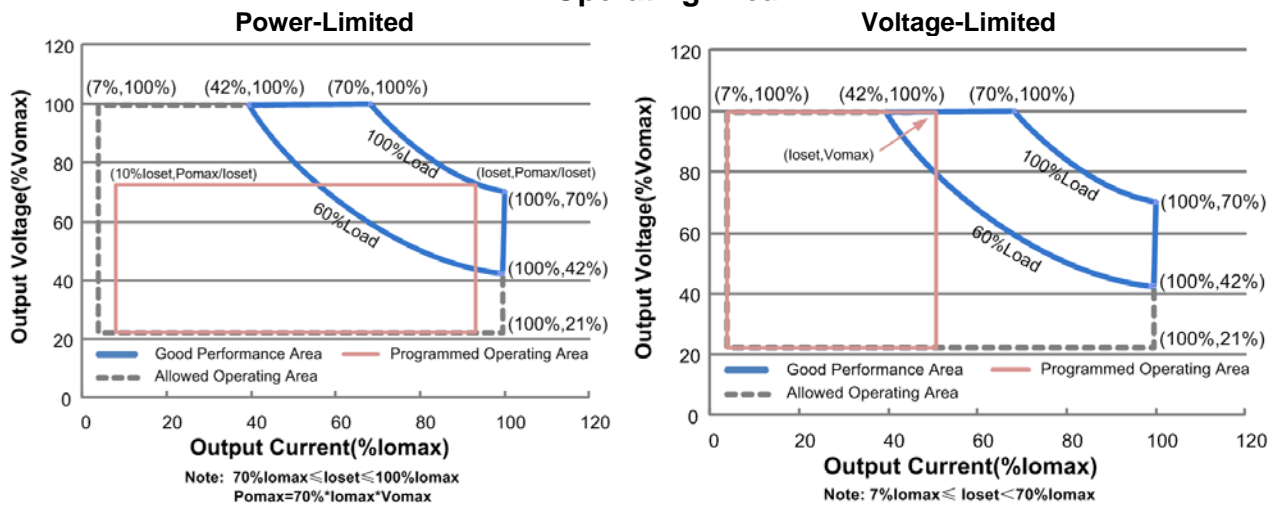

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	127~250 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	3.2 A	Measured at full load and 100 Vac input.
	-	-	1.45 A	Measured at full load and 220 Vac input.
Inrush Current(I ² t)	-	-	2.5 A ² s	At 220Vac input, 25°C cold start, duration=368 μs, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 50-60Hz, 60%-100% Load (144-240W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Ioset	-	5%Ioset	At full load condition
Output Current Setting(Ioset) Range	7%Iomax	-	100%Iomax	
Output Current Setting Range with Constant Power	70%Iomax	-	100%Iomax	
Total Output Current Ripple (pk-pk)	-	5%Iomax	10%Iomax	At full load condition, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	1%Iomax	-	At full load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%Iomax	At full load condition

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
No Load Output Voltage				
EUD-240S100BV	-	-	370V	
EUD-240S150BV	-	-	260V	
EUD-240S220BV	-	-	180V	
EUD-240S320BV	-	-	120V	
EUD-240S460BV	-	-	85V	
EUD-240S660BV	-	-	60V	
Line Regulation	-	-	±0.5%	Measured at full load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac and 220Vac input, 60%-100% Load
Temperature Coefficient of I _o set	-	0.03%/°C	-	Case temperature = 0°C ~T _c max

Note: All specifications are typical at 25°C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input:				
EUD-240S100BV				
I _o =700 mA	89.0%	91.0%	-	
I _o =1000mA	88.5%	90.5%	-	
EUD-240S150BV				
I _o =1050mA	89.0%	91.0%	-	
I _o =1500mA	88.5%	90.5%	-	
EUD-240S220BV				
I _o =1540mA	89.0%	91.0%	-	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =2200mA	88.5%	90.5%	-	
EUD-240S320BV				
I _o =2240mA	88.5%	90.5%	-	
I _o =3200mA	87.5%	89.5%	-	
EUD-240S460BV				
I _o =3220mA	88.5%	90.5%	-	
I _o =4600mA	87.5%	89.5%	-	
EUD-240S660BV				
I _o =4620mA	87.5%	89.5%	-	
I _o =6600mA	86.0%	88.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 220 Vac input: EUD-240S100BV				Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =700 mA	91.0%	93.0%	-	
I _o =1000mA	90.5%	92.5%	-	
EUD-240S150BV				
I _o =1050mA	91.0%	93.0%	-	
I _o =1500mA	90.5%	92.5%	-	
EUD-240S220BV				
I _o =1540mA	91.0%	93.0%	-	
I _o =2200mA	90.5%	92.5%	-	
EUD-240S320BV				
I _o =2240mA	90.5%	92.5%	-	
I _o =3200mA	90.0%	92.0%	-	
EUD-240S460BV				
I _o =3220mA	90.5%	92.5%	-	
I _o =4600mA	89.5%	91.5%	-	
EUD-240S660BV				
I _o =4620mA	90.0%	92.0%	-	
I _o =6600mA	88.5%	90.5%	-	
Efficiency at 277 Vac input: EUD-240S100BV				Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =700 mA	91.0%	93.0%	-	
I _o =1000mA	90.5%	92.5%	-	
EUD-240S150BV				
I _o =1050mA	91.0%	93.0%	-	
I _o =1500mA	90.5%	92.5%	-	
EUD-240S220BV				
I _o =1540mA	91.0%	93.0%	-	
I _o =2200mA	90.5%	92.5%	-	
EUD-240S320BV				
I _o =2240mA	90.5%	92.5%	-	
I _o =3200mA	90.0%	92.0%	-	
EUD-240S460BV				
I _o =3220mA	90.5%	92.5%	-	
I _o =4600mA	89.5%	91.5%	-	
EUD-240S660BV				
I _o =4620mA	90.0%	92.0%	-	
I _o =6600mA	88.5%	90.5%	-	
Standby power	-	1 W	-	Measured at 230Vac/50Hz; Dimming off
MTBF	-	234,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	97,000 Hours	-	Measured at 220Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+70°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	9.10 × 2.66 × 1.56 231 × 67.5 × 39.7			With mounting ear 9.92 × 2.66 × 1.56 252 × 67.5 × 39.7
Net Weight	-	1370 g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
DA1,DA2 High Level	9.5V	16V	22.5V	
DA1,DA2 Low Level	-6.5V	0V	6.5V	
DA1,DA2 Current	0mA	-	2mA	
Dimming Output Range	10%I _o set	-	I _o set	70%I _o max ≤ I _o set ≤ 100%I _o max
	7%I _o max	-	I _o set	7%I _o max ≤ I _o set < 70%I _o max

Note: All specifications are typical at 25 °C unless stated otherwise.

Safety & EMC Compliance


Safety Category	Standard
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV ⁽²⁾
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment
DALI Standards	Notes
DALI	IEC62386-101,102 & part of 207 ⁽³⁾

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


(2) To perform electric strength (hi-pot) testing, the "GDT ground disconnect" (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.

(3) Optional Commands Implemented: 242 (query short circuit), 243 (query open circuit)



Lifetime vs. Case Temperature






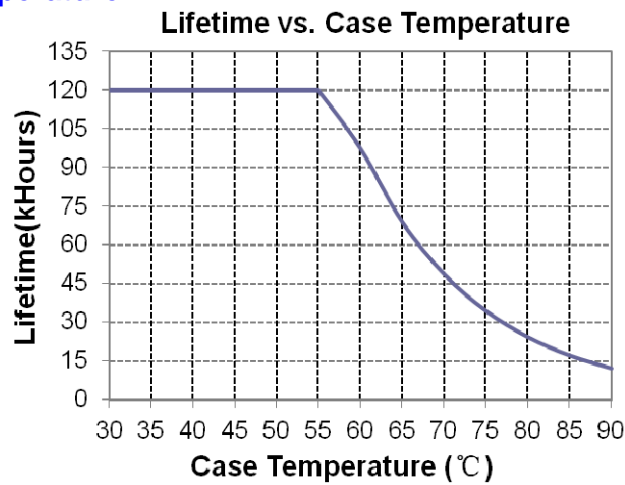






Inrush Current Waveform

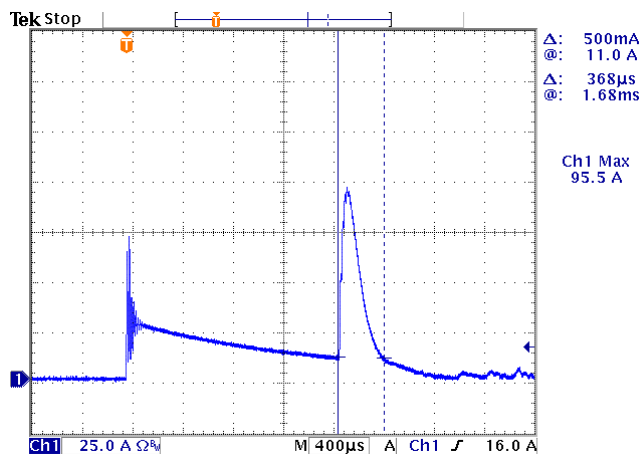


Efficiency vs. Load

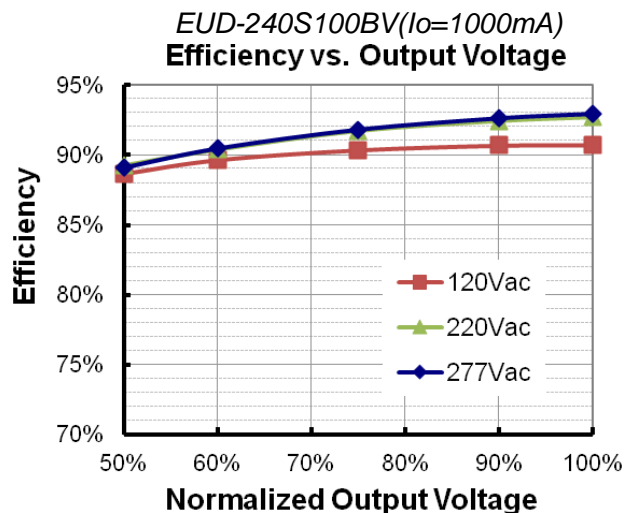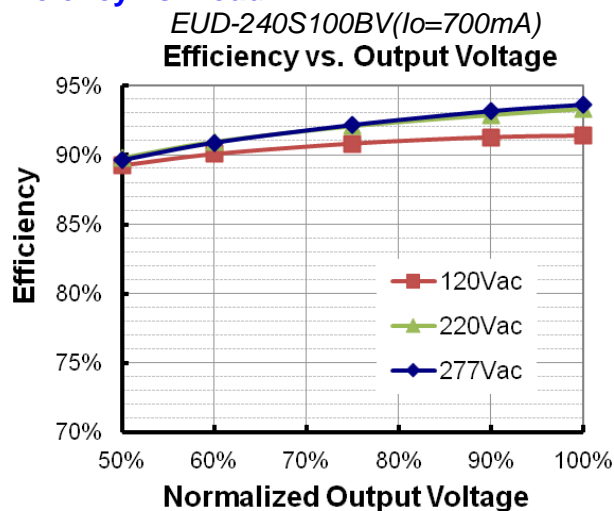

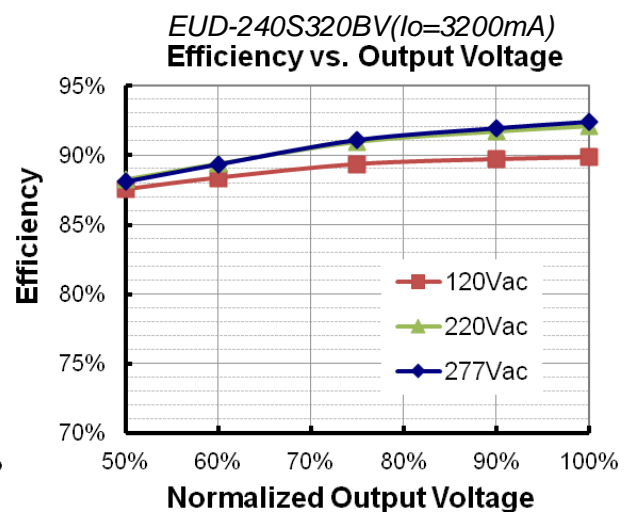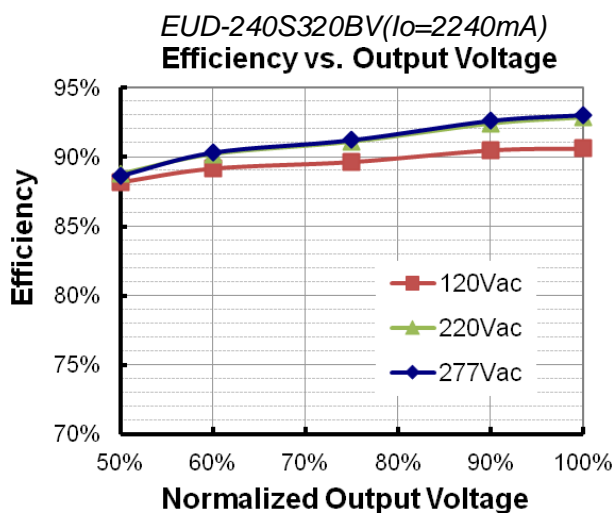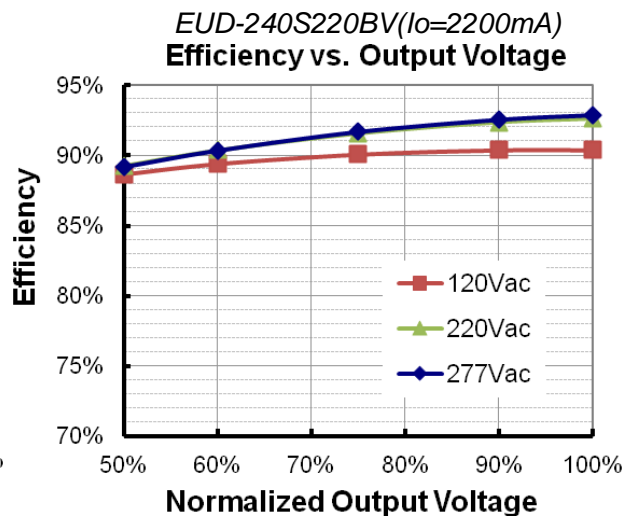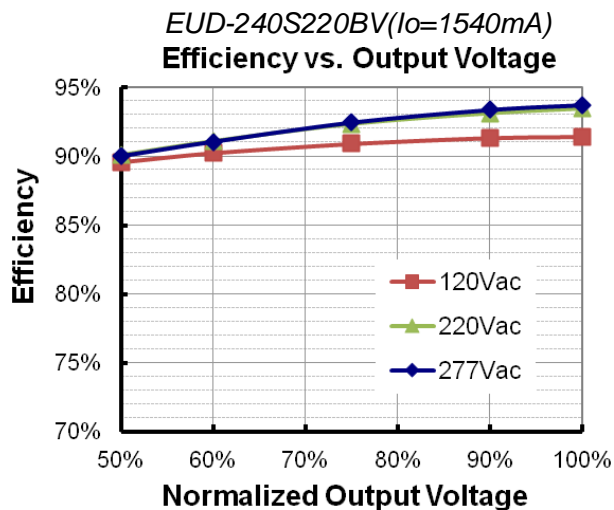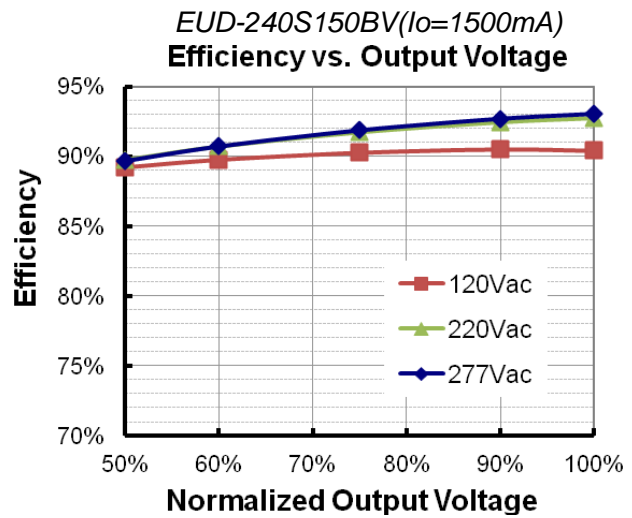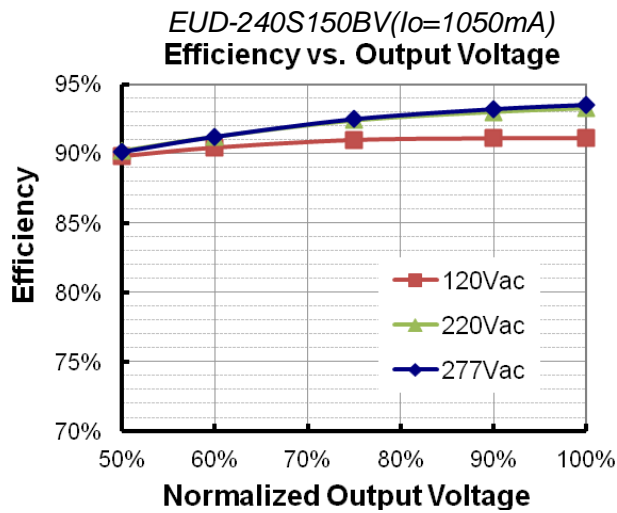


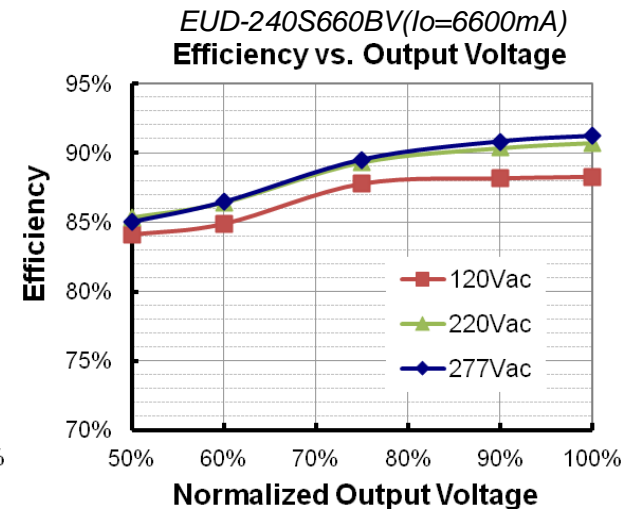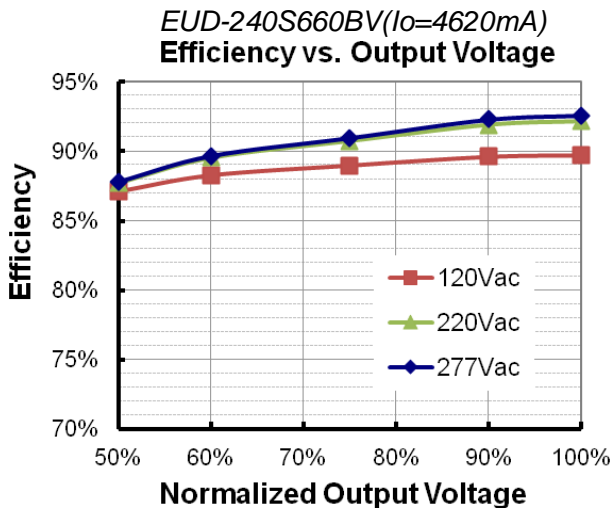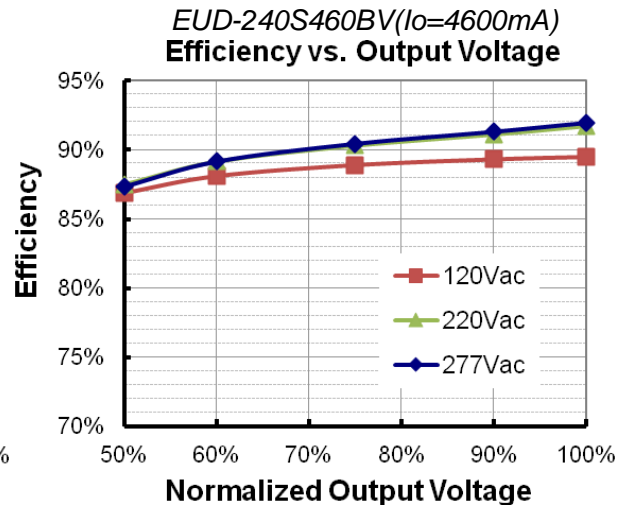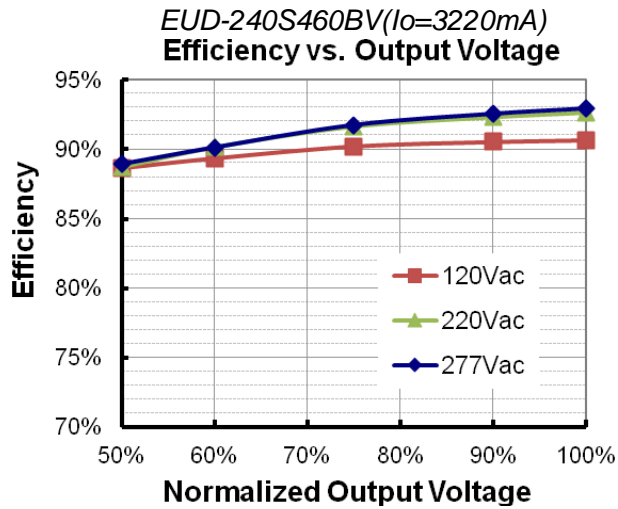

Power Factor

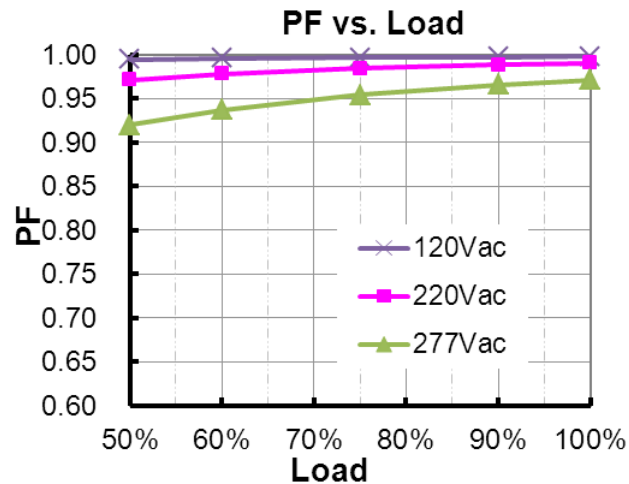

Total Harmonic Distortion

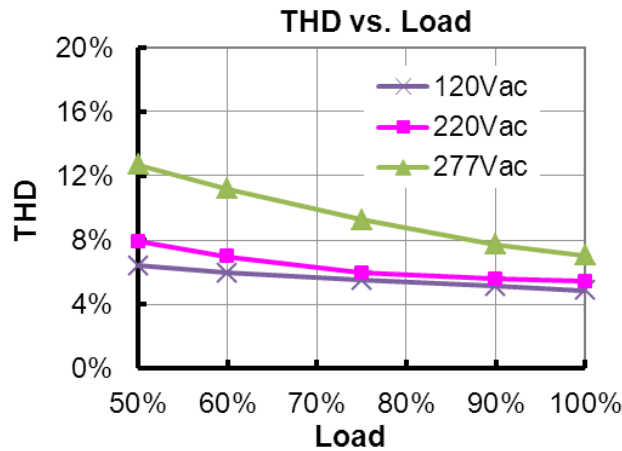


Protection Functions


Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.

Dimming


● DALI Dimming

The recommended implementation of the dimming control is provided below.

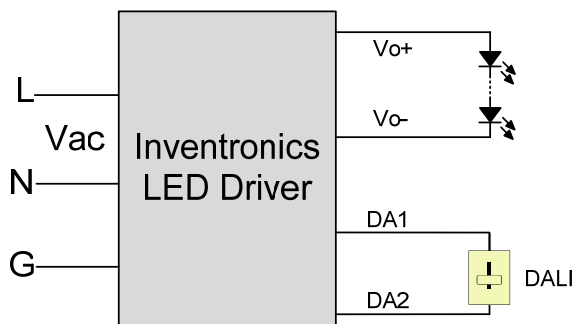

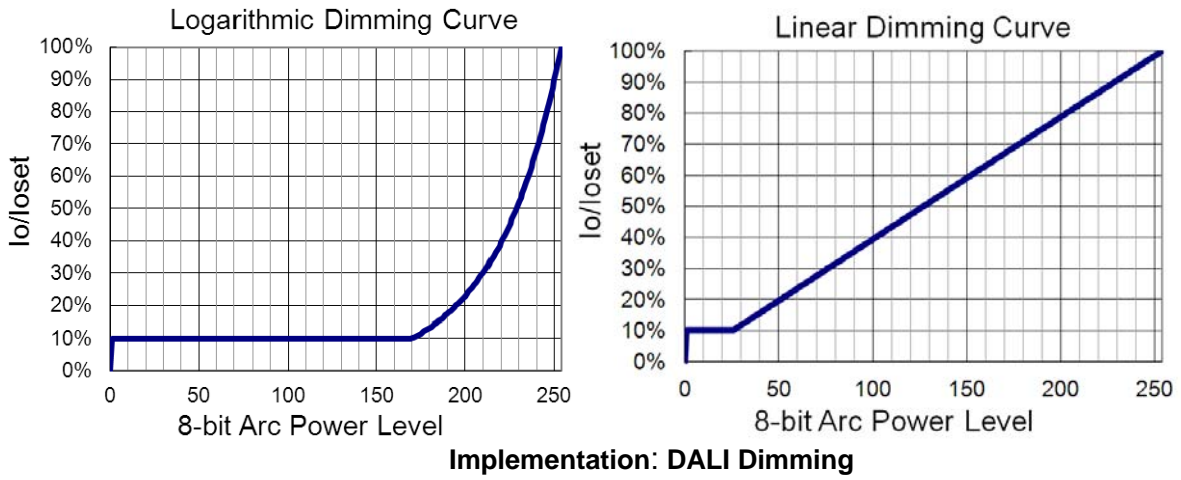

Programming Connection Diagram

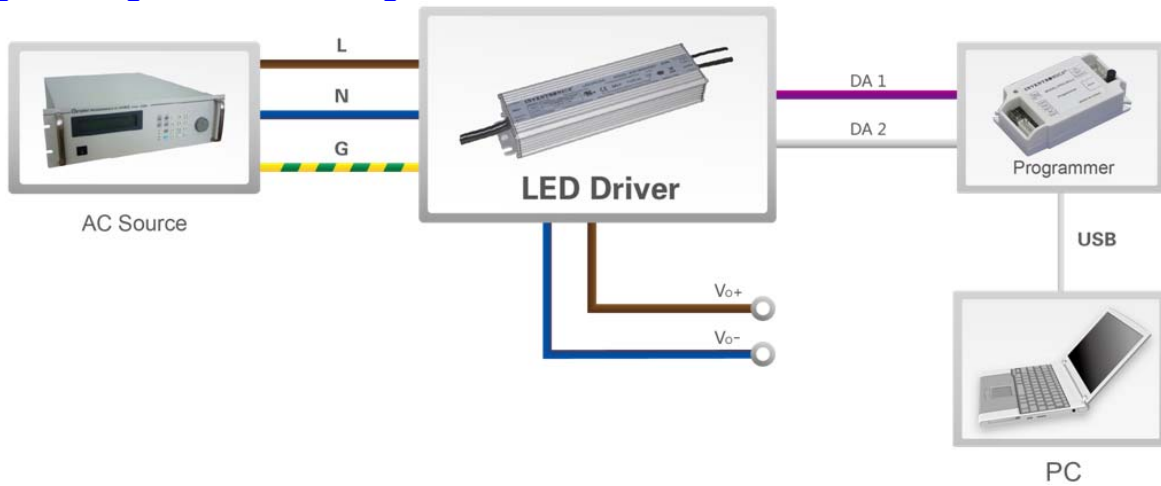

Note: The driver needs to be powered on during the programming process.

- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-03-13	A	Datasheets Release	/	/
2015-06-01	B	Description	/	Updated
		Models	/	Updated
		Mechanical Outline	/	Updated
2015-09-16	C	KS, DALI Logo	/	Added
		Features	/	Updated
		Safety & EMC Compliance	Safety & EMC Compliance	Standards Compliance
		Standards Compliance	DALI Standards	Added
2016-01-28	D	Net Weight	/	Updated
		Mechanical Outline	/	Updated
2016-04-08	E	General Specifications	With mounting ear	Added
		Standards Compliance	/	Updated
2016-11-09	F	Inrush Current(I ² t)	/	Updated
		Inrush Current Waveform	/	Updated
2017-11-21	G	Input Specifications	PF/THD	Updated
		Output Specifications	Turn-on Delay Time	Updated
		Temperature Coefficient of loset	Max 0.03%/°C	Typ 0.03%/°C
		Standby power	Max 1W	Typ 1W
		Dimensions	231 × 67.5 × 39.5	231 × 67.5 × 39.7
		Safety & EMC Compliance	/	Updated
		Mechanical Outline	/	Updated