

## Features

- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- DALI-2 and D4i Certified
- 3-Timer-Modes Dimmable
- Dim-to-Off with Standby Power  $\leq 0.5$  W
- Always-on Auxiliary Power:  
24Vdc, 125mA, 3W (Transient Peak Power up to 10W)
- Integrated 16Vdc Bus Power Supply based on DALI-2
- Integrated Power Monitoring with High Accuracy up to  $\pm 1\%$
- Output Lumen Compensation
- End-of-Life Indicator
- Thermal Sensing and Protection for LED Module
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 7 Year Warranty



## Description

The EUM-200SxxxBx series is a 200W, constant-current, NFC programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for intra-luminaire solutions and health monitoring applications, this family provides integrated AC power monitoring with an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports two-way communication via DALI-2 and complies with D4i. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.

## Models

| Adjustable Output Current Range | Full-Power Current Range(1) | Default Output Current | Input Voltage Range(2)     | Output Voltage Range | Max. Output Power | Typical Efficiency (3) | Typical Power Factor |        | Model Number (5)             |
|---------------------------------|-----------------------------|------------------------|----------------------------|----------------------|-------------------|------------------------|----------------------|--------|------------------------------|
|                                 |                             |                        |                            |                      |                   |                        | 120Vac               | 220Vac |                              |
| 70-1050mA                       | 700-1050mA                  | 700 mA                 | 90~305 Vac/<br>127~300 Vdc | 95~286 Vdc           | 200 W             | 93.5%                  | 0.99                 | 0.96   | EUM-200S105Bx                |
| 105-1500mA                      | 1050-1500mA                 | 1050 mA                | 90~305 Vac/<br>127~300 Vdc | 67~190 Vdc           | 200 W             | 93.5%                  | 0.99                 | 0.96   | EUM-200S150Bx                |
| 180-2800mA                      | 1800-2800mA                 | 2100 mA                | 90~305 Vac/<br>127~300 Vdc | 36~111 Vdc           | 200 W             | 93.0%                  | 0.99                 | 0.96   | EUM-200S280Bx <sup>(4)</sup> |
| 350-5600mA                      | 3500-5600mA                 | 4200 mA                | 90~305 Vac/<br>127~300 Vdc | 18 ~ 57 Vdc          | 200 W             | 92.0%                  | 0.99                 | 0.96   | EUM-200S560Bx <sup>(4)</sup> |

**Notes:** (1) Output current range with constant power at 200W





(2) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac.

(3) Measured at 100%load and 220Vac input (see below "General Specifications" for details).

(4) SELV output.

(5) x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models; x = B are BIS models.

## I-V Operation Area

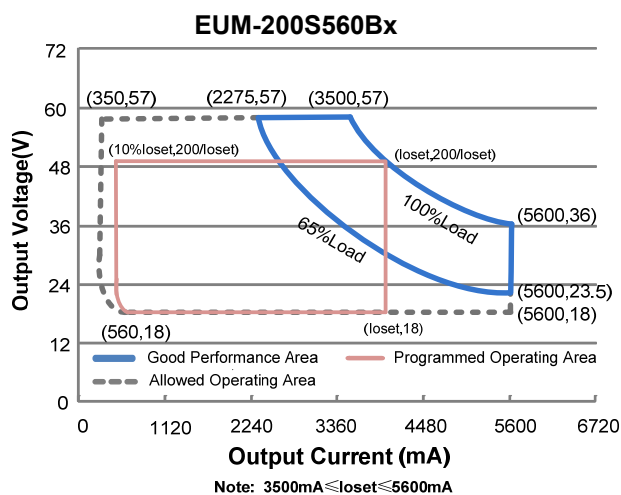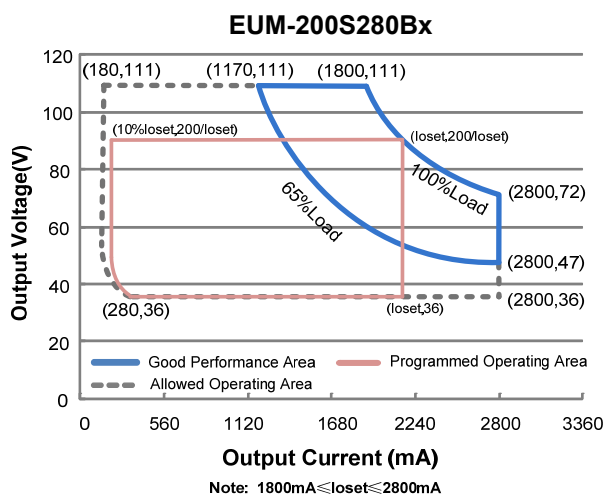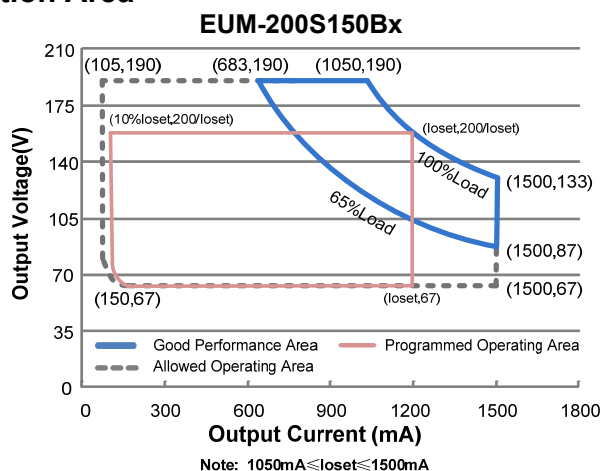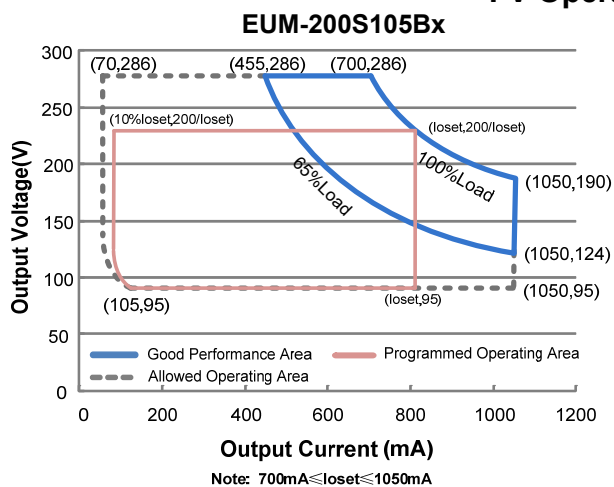

## Input Specifications

| Parameter                | Min.    | Typ. | Max.                  | Notes   |
|--------------------------|---------|------|-----------------------|---|
| Input AC Voltage         | 90 Vac  | -    | 305 Vac               |   |
| Input DC Voltage         | 127 Vdc | -    | 300 Vdc               |   |
| Input Frequency          | 47 Hz   | -    | 63 Hz                 |   |
| Leakage Current          | -       | -    | 0.75 MIU              | UL8750; 277Vac/60Hz   |
|                          | -       | -    | 0.70 mA               | IEC60598-1; 240Vac/60Hz,  |
| Input AC Current         | -       | -    | 2.12 A                | Measured at 100%load and 120 Vac input.   |
|                          | -       | -    | 1.12 A                | Measured at 100%load and 220 Vac input.   |
| Inrush Current( $I^2t$ ) | -       | -    | 4.65 A <sup>2</sup> s | At 220Vac input, 25°C cold start, duration=584 $\mu$ s, 10%lpk-10%lpk. See Inrush Current Waveform for the details. |

## Input Specifications (Continued)

| Parameter | Min. | Typ. | Max. | Notes  |
|-----------|------|------|------|--|
| PF        | 0.9  | -    | -    | At 100-277Vac, 50-60Hz, 65%-100% load (130-200W) |
| THD       | -    | -    | 20%  |  |
| THD       | -    | -    | 10%  | At 220-240Vac, 50-60Hz, 75%-100% load (150-200W) |

## Output Specifications

| Parameter   | Min.     | Typ.     | Max.     | Notes  |
|---|----------|----------|----------|--|
| Output Current Tolerance                            | -5%loset | -        | 5%loset  | At 100%load condition  |
| Output Current Setting(loset)<br>Range              |          |          |          |  |
| EUM-200S105Bx                                       | 70 mA    | -        | 1050 mA  |  |
| EUM-200S150Bx                                       | 105 mA   | -        | 1500 mA  |  |
| EUM-200S280Bx                                       | 180 mA   | -        | 2800 mA  |  |
| EUM-200S560Bx                                       | 350 mA   | -        | 5600 mA  |  |
| Output Current Setting Range<br>with Constant Power |          |          |          |  |
| EUM-200S105Bx                                       | 700 mA   | -        | 1050 mA  |  |
| EUM-200S150Bx                                       | 1050 mA  | -        | 1500 mA  |  |
| EUM-200S280Bx                                       | 1800 mA  | -        | 2800 mA  |  |
| EUM-200S560Bx                                       | 3500 mA  | -        | 5600 mA  |  |
| Total Output Current Ripple<br>(pk-pk)              | -        | 5%lomax  | 10%lomax | At 100%load condition. 20 MHz BW   |
| Output Current Ripple at<br>< 200 Hz (pk-pk)        | -        | 2%lomax  | -        | At 100%load condition. Only this component of ripple is associated with visible flicker. |
| Startup Overshoot Current                           | -        | -        | 10%lomax | At 100%load condition  |
| No Load Output Voltage                              |          |          |          |  |
| EUM-200S105Bx                                       | -        | -        | 360 V    |  |
| EUM-200S150Bx                                       | -        | -        | 240 V    |  |
| EUM-200S280Bx                                       | -        | -        | 120 V    |  |
| EUM-200S560Bx                                       | -        | -        | 75 V     |  |
| Line Regulation                                     | -        | -        | ±0.5%    | Measured at 100%load   |
| Load Regulation                                     | -        | -        | ±3.0%    |  |
| Turn-on Delay Time                                  | -        | -        | 0.5 s    | Measured at all dimming modes except DALI-2, and 120-277Vac input, 65%-100% Load         |
|   | -        | -        | 1.0 s    | Measured at DALI-2 dimming mode, and 120-277Vac input, 65%-100% Load                     |
| Temperature Coefficient of<br>loset                 | -        | 0.03%/°C | -        | Case temperature = 0°C~Tc max  |



## General Specifications (Continued)

| Parameter  | Min.   | Typ.   | Max.                                 | Notes   |
|--|--|--|--------------------------------------|---|
| Efficiency at 277 Vac input:<br>EUM-200S105Bx<br>Io= 700 mA<br>Io=1050 mA<br>EUM-200S150Bx<br>Io=1050 mA<br>Io=1500 mA<br>EUM-200S280Bx<br>Io=1800 mA<br>Io=2800 mA<br>EUM-200S560Bx<br>Io=3500 mA<br>Io=5600 mA | 92.0%<br>92.0%<br>92.0%<br>92.0%<br>91.5%<br>91.5%<br>90.5%<br>90.0% | 94.0%<br>94.0%<br>94.0%<br>94.0%<br>93.5%<br>93.5%<br>92.5%<br>92.0% | -<br>-<br>-<br>-<br>-<br>-<br>-<br>- | Measured at 100%load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| Power Monitoring Accuracy  | -1%  | -  | 1%                                   | Measured at 220Vac input and 100%Load   |
| Standby Power  | -  | -  | 0.5 W                                | Measured at 230Vac/50Hz; Dimming off  |
| MTBF   | -  | 205,000 Hours  | -                                    | Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)  |
| Lifetime   | -  | 102,000 Hours  | -                                    | Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details  |
| Operating Case Temperature for Safety Tc_s   | -40°C  | -  | +90°C                                |   |
| Operating Case Temperature for Warranty Tc_w   | -40°C  | -  | +75°C                                | Case temperature for 7 years warranty<br>Humidity: 10% RH to 95% RH;  |
| Storage Temperature  | -40°C  | -  | +85°C                                | Humidity: 5%RH to 95%RH   |
| Dimensions<br>Inches (L × W × H)<br>Millimeters (L × W × H)  | 6.73 × 2.66 × 1.44<br>171 × 67.5 × 36.5                              |  |                                      | With mounting ear<br>7.40 × 2.66 × 1.44<br>188 × 67.5 × 36.5  |
| Net Weight   | -  | 1000 g   | -                                    |   |

## Dimming Specifications

Dimming Specifications

| Parameter            |  | Min.                                | Typ. | Max.   | Notes   |
|----------------------|--|-------------------------------------|------|--------|---|
| DA+, DA- High Level  |  | 9.5 V                               | 16 V | 22.5 V |   |
| DA+, DA- Low Level   |  | -6.5 V                              | 0 V  | 6.5 V  |   |
| DA+, DA- Current     |  | 0 mA                                | -    | 2 mA   |   |
| Dimming Output Range | EUM-200S105Bx<br>EUM-200S150Bx<br>EUM-200S280Bx<br>EUM-200S560Bx | 10%loset                            | -    | loset  | 700 mA ≤ loiset ≤ 1050 mA<br>1050 mA ≤ loiset ≤ 1500 mA<br>1800 mA ≤ loiset ≤ 2800 mA<br>3500 mA ≤ loiset ≤ 5600 mA |
|                      | EUM-200S105Bx<br>EUM-200S150Bx<br>EUM-200S280Bx<br>EUM-200S560Bx | 70 mA<br>105 mA<br>180 mA<br>350 mA | -    | loset  | 70 mA ≤ loiset < 700 mA<br>105 mA ≤ loiset < 1050 mA<br>180 mA ≤ loiset < 1800 mA<br>350 mA ≤ loiset < 3500 mA      |


## Safety & EMC Compliance

| Safety Category                        | Standard  |
|--|---|
| UL/CUL                                 | UL8750,CAN/CSA-C22.2 No. 250.13   |
| ENEC                                   | EN 61347-1, EN 61347-2-13   |
| CE                                     | EN 61347-1, EN 61347-2-13<br>EN 301 489-1 V2.2.3<br>EN 301 489-3 V2.1.1<br>EN 300 330 V2.1.1<br>EN 62479/EN 50663/EN 50665/EN 50364   |
| CB                                     | IEC 61347-1, IEC 61347-2-13   |
| CCC                                    | GB 19510.1, GB 19510.14   |
| PSE                                    | J 61347-1, J 61347-2-13   |
| BIS                                    | IS 15885(Part2/Sec13)   |
| Global Mark                            | AS/NZS 61347.1, AS/NZS 61347.2.13   |
| KS                                     | KS C 7655   |
| EAC                                    | ГОСТ Р МЭК 61347-1, ГОСТ IEC 61347-2-13   |
| NOM                                    | NOM-058-SCFI  |
| EMI Standards                          | Notes   |
| EN 55015/GB 17743/KN 15 <sup>(1)</sup> | Conducted emission Test & Radiated emission Test  |
| EN 61000-3-2/GB 17625.1                | Harmonic current emissions  |
| EN 61000-3-3                           | Voltage fluctuations & flicker  |
| FCC Part 15 <sup>(1)</sup>             | ANSI C63.4 Class B<br>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation. |
| EMS Standards                          | Notes   |
| EN 61000-4-2                           | Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge   |
| EN 61000-4-3                           | Radio-Frequency Electromagnetic Field Susceptibility Test-RS  |
| EN 61000-4-4                           | Electrical Fast Transient / Burst-EFT   |
| EN 61000-4-5                           | Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV   |
| EN 61000-4-6                           | Conducted Radio Frequency Disturbances Test-CS  |
| EN 61000-4-8                           | Power Frequency Magnetic Field Test   |
| EN 61000-4-11                          | Voltage Dips  |
| EN 61547                               | Electromagnetic Immunity Requirements Applies To Lighting Equipment   |
| DALI-2 Standards                       | Notes   |
| DALI-2 <sup>(2)</sup>                  | IEC 62386-101, -102 & -207  |


**Notes:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) DALI parts: 101, 102, 150, 207, 250, 251, 252, 253.

## Derating

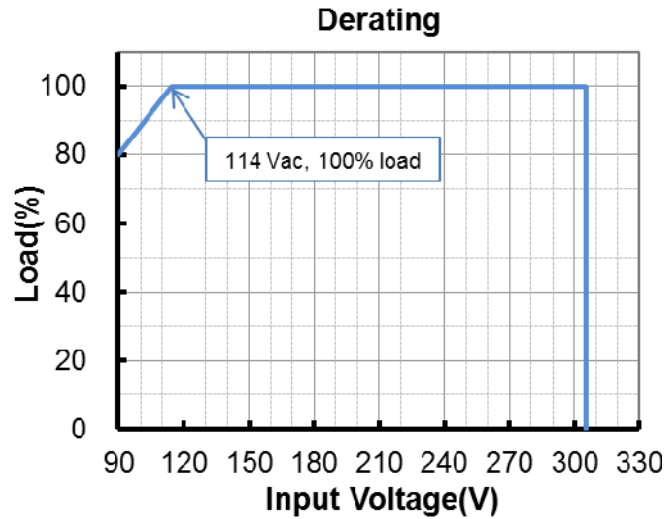


## Lifetime vs. Case Temperature

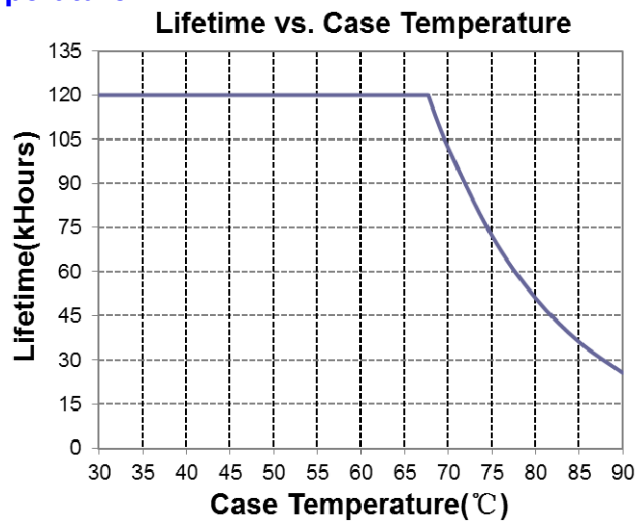




## Inrush Current Waveform

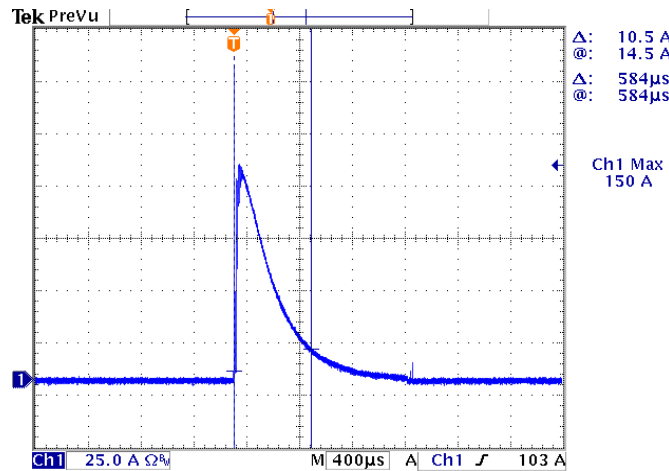


## Efficiency vs. Load

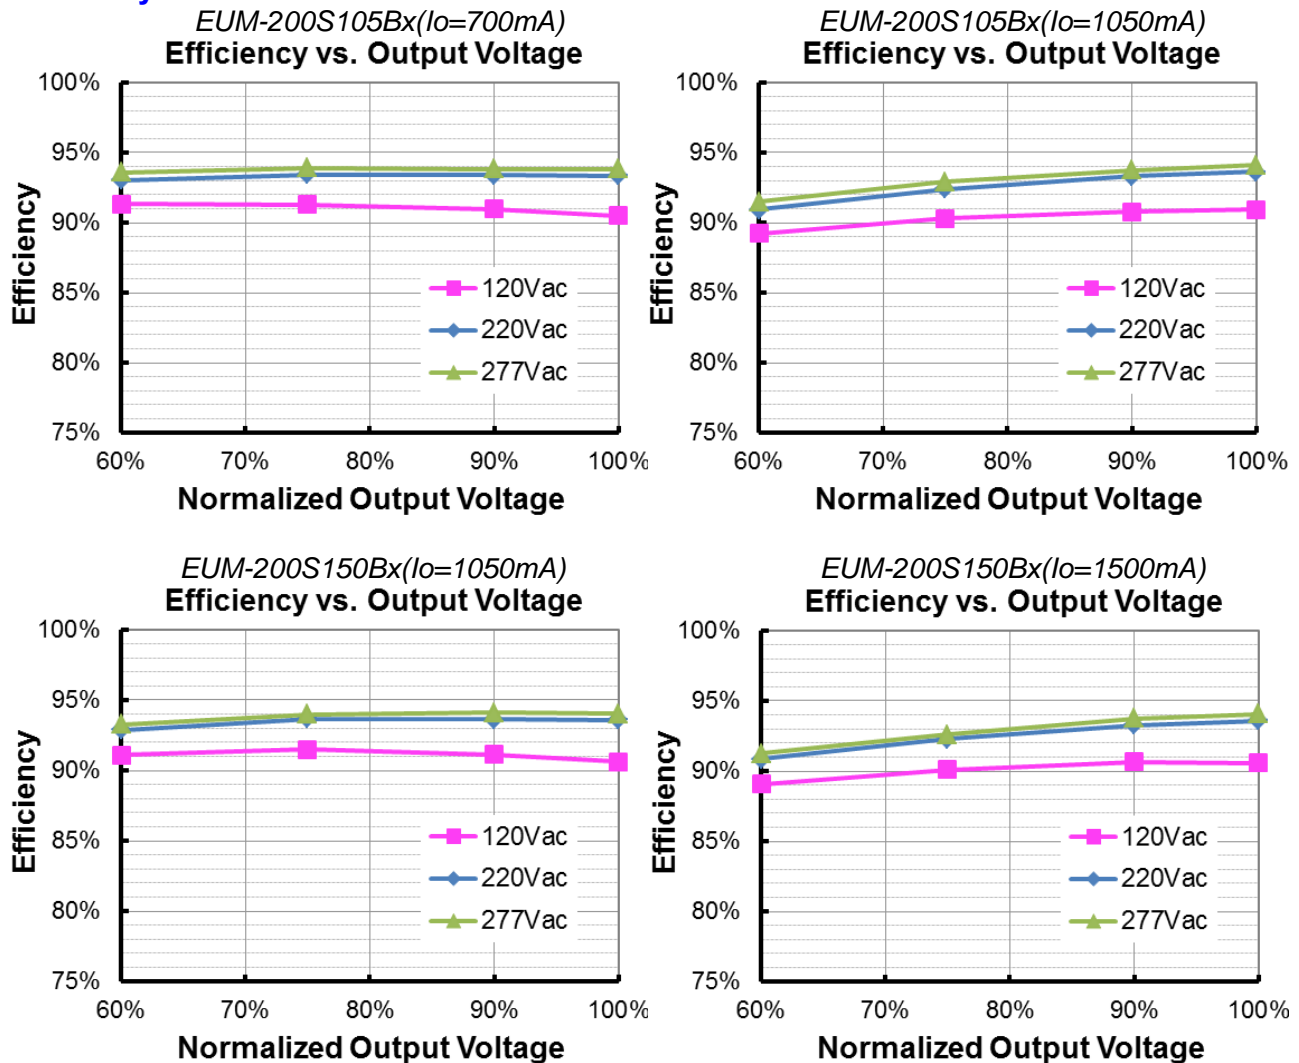





*EUM-200S280Bx( $I_o=1800mA$ )*  
**Efficiency vs. Output Voltage**

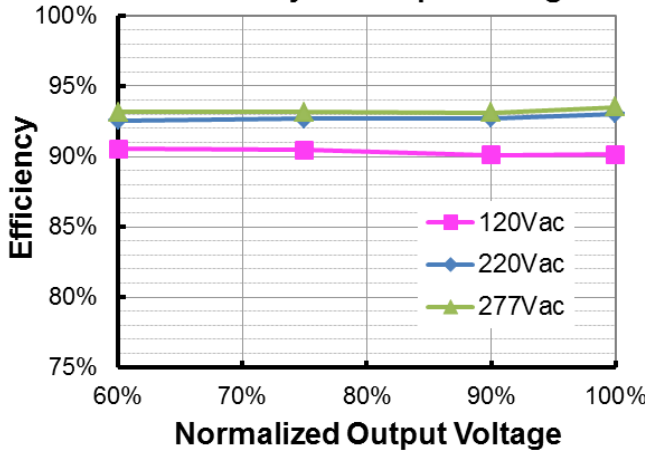


*EUM-200S280Bx( $I_o=2800mA$ )*  
**Efficiency vs. Output Voltage**

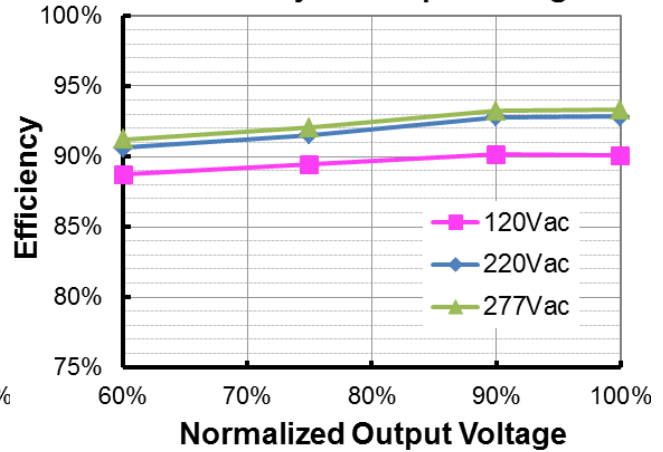


*EUM-200S560Bx( $I_o=3500mA$ )*  
**Efficiency vs. Output Voltage**

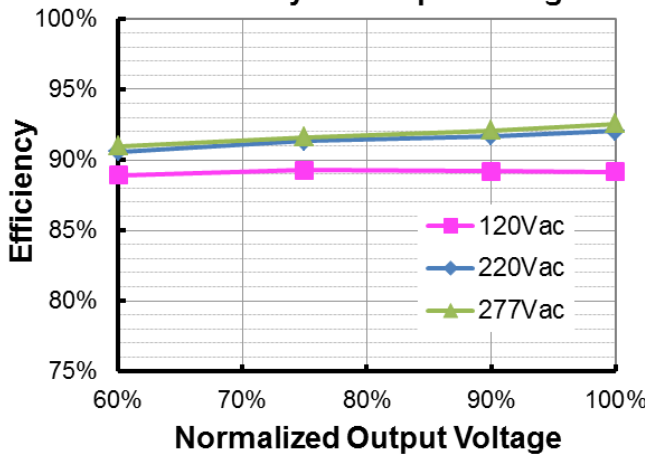


*EUM-200S560Bx( $I_o=5600mA$ )*  
**Efficiency vs. Output Voltage**

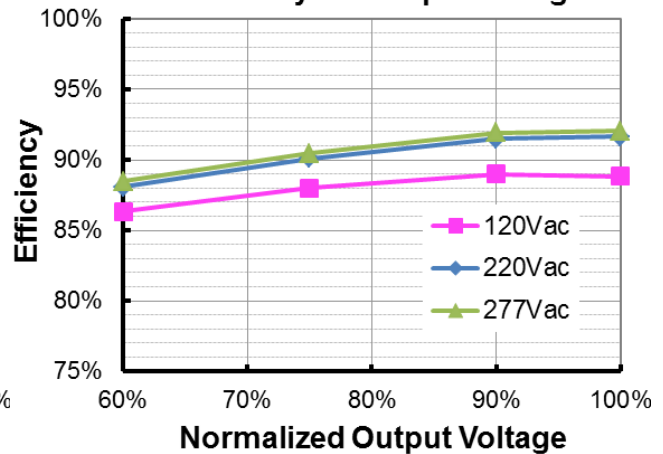

## Power Factor

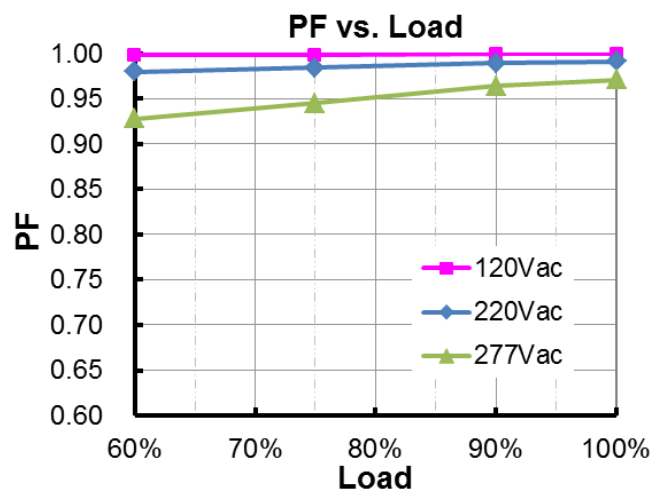

## Total Harmonic Distortion

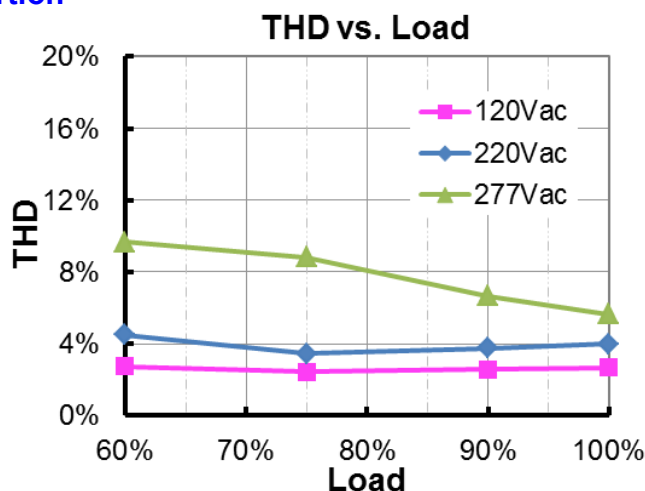


## Protection Functions


| Parameter                             |                                | Min.   | Typ.     | Max.      | Notes   |
|---------------------------------------|--------------------------------|--|----------|-----------|---|
| External Thermal Protection           | R1 (Start derating)            | -  | 1.67 kΩ  | -         | The output current starts to decrease linearly when the actual NTC resistance value is lower than R1, until R2 is reached.      |
|                                       | R2 (Stop derating)             | -  | 1.27 kΩ  | -         | When the actual NTC resistance value is lower than R2, the output current will stay at the programmed Protection Current Floor. |
|                                       | Protection Current Floor       | 10%loset   | 20%loset | 100%loset | 10%loset > Iomin (default setting is 20%)   |
|                                       |                                | Iomin  | 20%loset | 100%loset | 10%loset ≤ Iomin (default setting is 20%)   |
| Over Voltage Protection               |                                | Limits output voltage at no load and in case the normal voltage limit fails.   |          |           |   |
| Short Circuit Protection              |                                | Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed. |          |           |   |
| Over Temperature Protection           |                                | Decreases output current, returning to normal after over temperature is removed.   |          |           |   |
| Input Under Voltage Protection (IUVP) | Input Under Voltage Protection | 70 Vac   | 80 Vac   | 90 Vac    | Turn off the output when the input voltage falls below protection voltage.  |
|                                       | Input Under Voltage Recovery   | 75 Vac   | 85 Vac   | 95 Vac    | Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.   |
| Input Over Voltage Protection         | Input Over Voltage Protection  | 310 Vac  | 320 Vac  | 330 Vac   | Turn off the output when the input voltage exceeds protection voltage.  |
|                                       | Input Over Voltage Recovery    | 300 Vac  | 310 Vac  | 320 Vac   | Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.                                     |
|                                       | Max. of Input Over Voltage     | -  | -        | 350 Vac   | The driver can survive stabilized input over voltage conditions up to 350Vac for a total of 8 hours.                            |

**Note:** (1) The recommended NTC type is 10kΩ NTC, Murata NCP18XH103J03RB.

## ● Input Under Voltage Protection Diagram

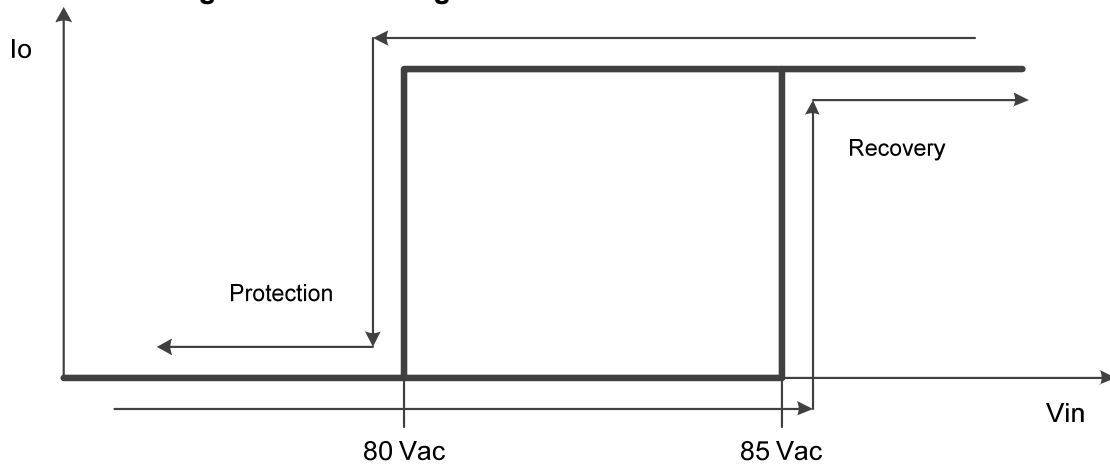


## ● Input Over Voltage Protection Diagram

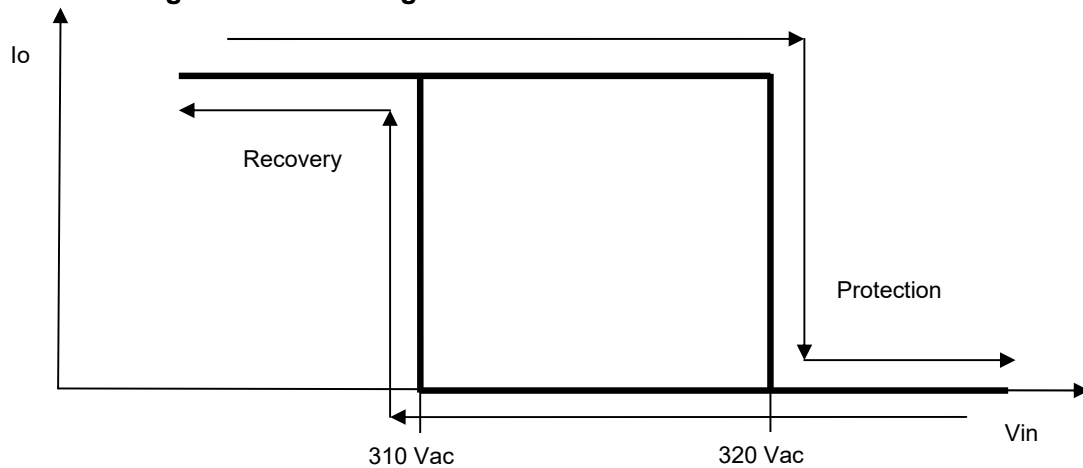


## Dimming

### ● DALI-2 Dimming

The recommended implementation of the dimming control is provided below.

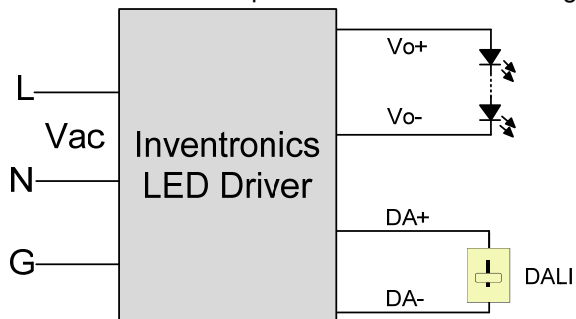

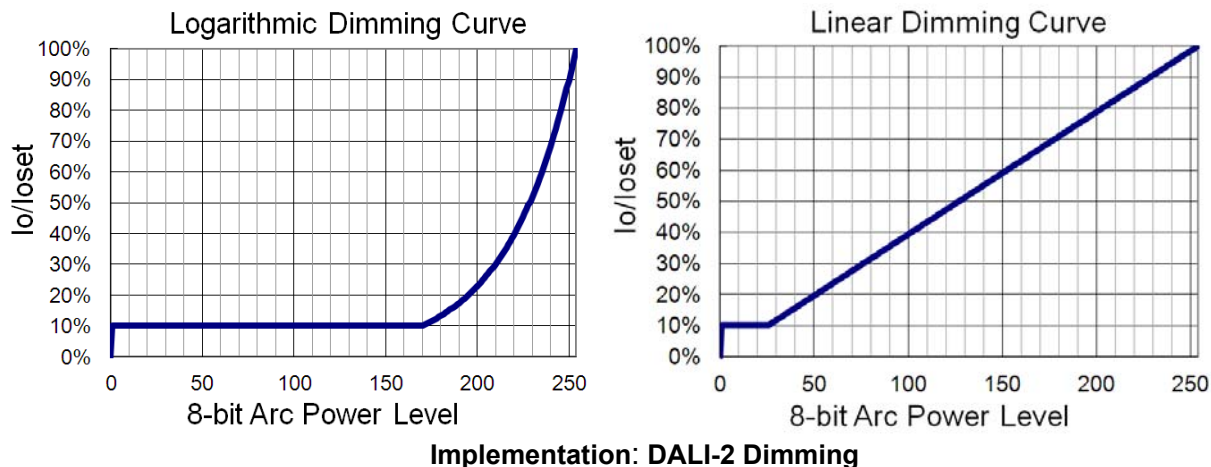

## ● Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.


## ● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

## ● End Of Life

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued.

## Programming Connection Diagram

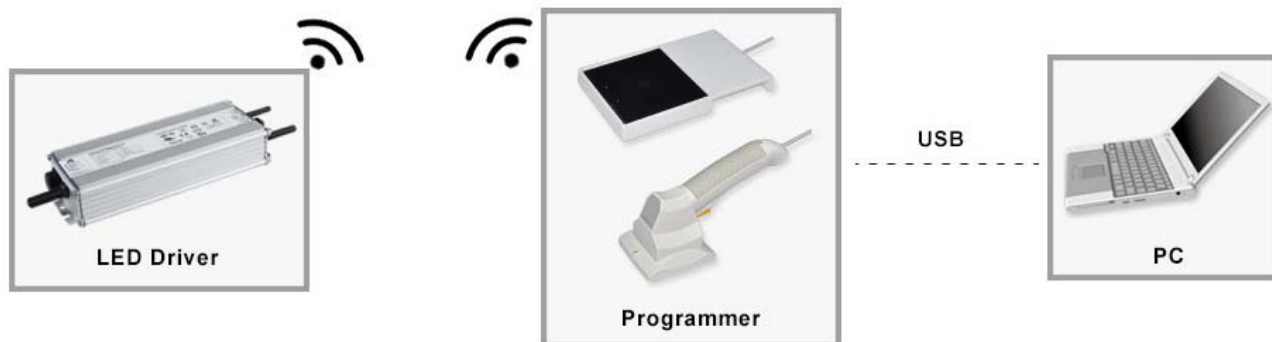


**Note:** The driver does not need to be powered on during the programming process.

- Please refer to [PRG-NFC-H](#) or [PRG-NFC-D](#) (Programmer) datasheet for details.


## Mechanical Outline

### EUM-200SxxxBG

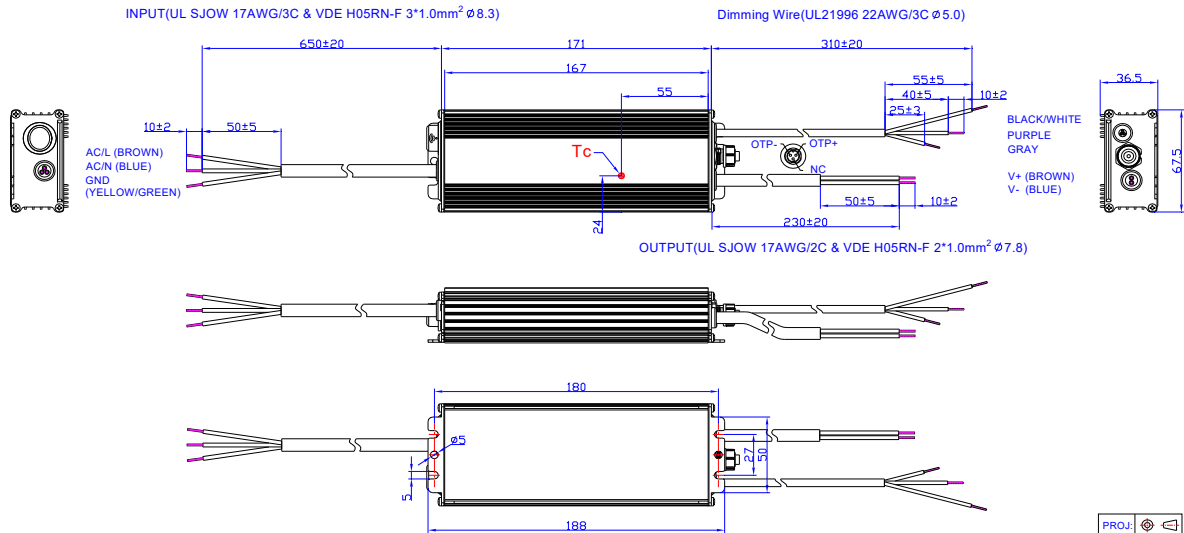


Unspecified tolerance:±1

### EUM-200SxxxBT

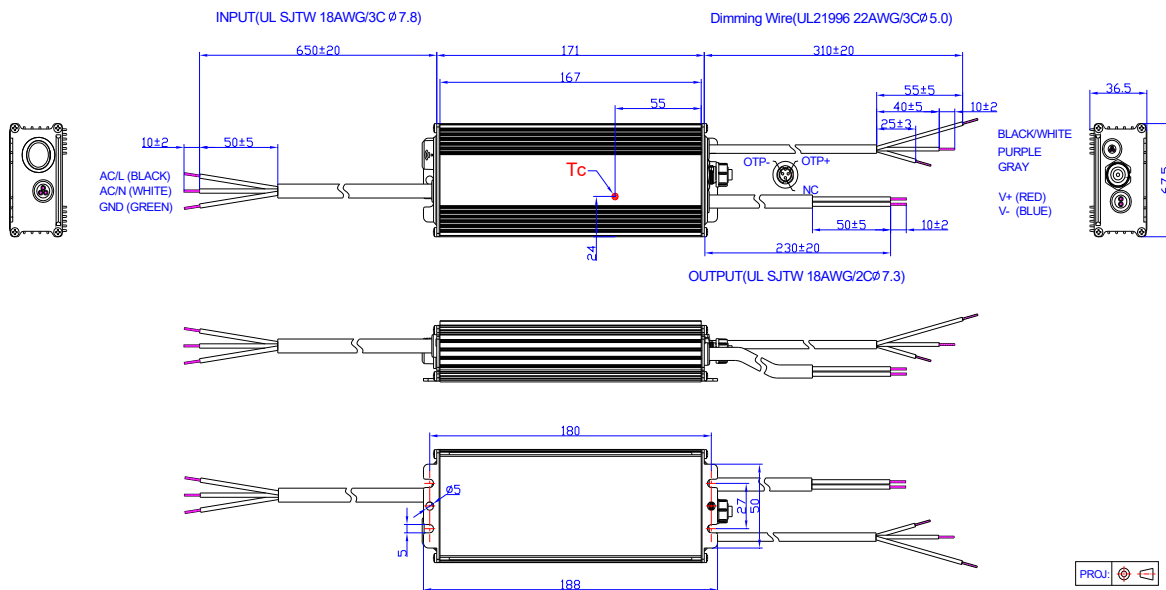

Unspecified tolerance:±1

## EUM-200SxxxBB

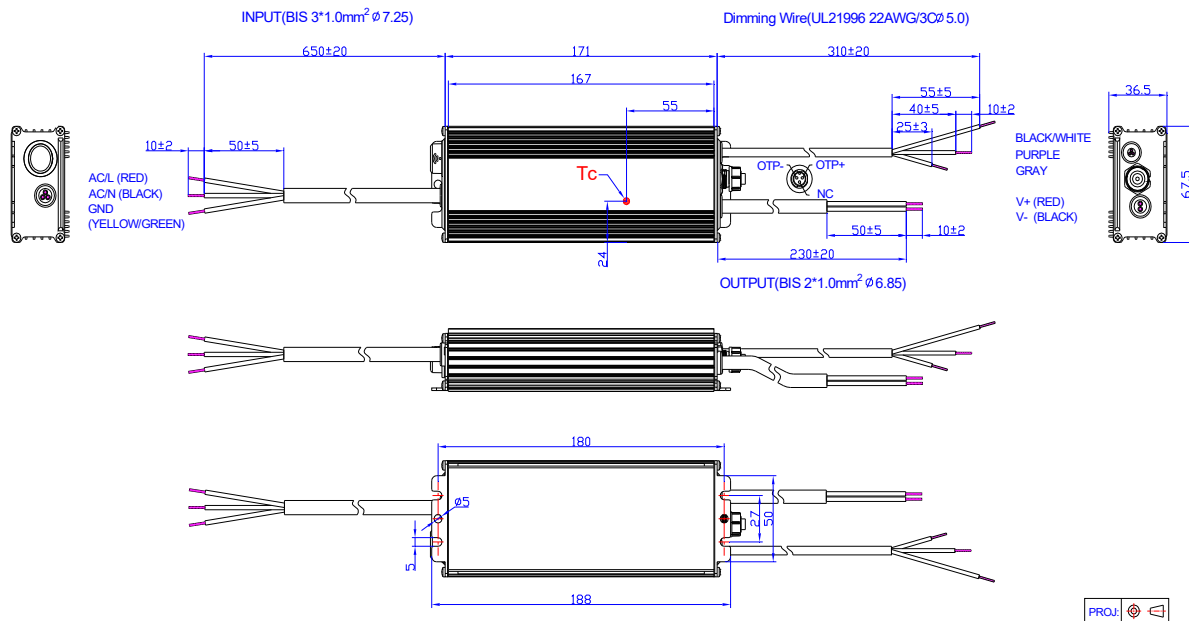

Unspecified tolerance:  $\pm 1$

## RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

## Revision History

| Change Date | Rev. | Description of Change   |      |         |
|-------------|------|-------------------------|------|---------|
|             |      | Item                    | From | To      |
| 2020-08-04  | A    | Datasheet Release       | /    | /       |
| 2021-06-02  | B    | Product Photograph      | /    | Updated |
|             |      | EAC logo                | /    | Added   |
|             |      | NOM logo                | /    | Added   |
|             |      | Safety & EMC Compliance | /    | Updated |
|             |      | Mechanical Outline      | /    | Updated |