

Features

- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- DALI-2 and D4i Certified
- 3-Timer-Modes Dimmable
- Dim-to-Off with Standby Power ≤ 0.5 W
- Always-on Auxiliary Power:
24Vdc, 125mA, 3W (Transient Peak Power up to 10W)
- Integrated 16Vdc current source power supply based on DALI-2
- Integrated Power Monitoring with High Accuracy up to $\pm 1\%$
- Output Lumen Compensation
- End-of-Life Indicator
- Thermal Sensing and Protection for LED Module
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for use in a Class I, Division 2 hazardous (Classified) location
- 7 Years Warranty



Description

The EUM-320SxxxBx series is a 320W, constant-current, NFC programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for intra-luminaire solutions and health monitoring applications, this family provides integrated AC power monitoring with an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports two-way communication via DALI-2 and complies with D4i. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.






Models

| Adjustable Output Current Range | Full-Power Current Range (1) | Default Output Current | Input Voltage Range(2) | Output Voltage Range | Max. Output Power | Typical Efficiency (3) | Typical Power Factor | | Model Number (5) |
|---------------------------------|------------------------------|------------------------|----------------------------|----------------------|-------------------|------------------------|----------------------|--------|------------------------------|
| | | | | | | | 120Vac | 220Vac | |
| 70-1050mA | 700-1050mA | 700 mA | 90~305 Vac/ 127~300 Vdc | 153~457 Vdc | 320 W | 94.5% | 0.99 | 0.96 | EUM-320S105Bx |
| 105-1500mA | 1050-1500mA | 1400 mA | 90~305 Vac/ 127~300 Vdc | 107~305 Vdc | 320 W | 94.0% | 0.99 | 0.96 | EUM-320S150Bx |
| 175-2500mA | 1750-2500mA | 2100 mA | 90~305 Vac/ 127~300 Vdc | 64~183 Vdc | 320 W | 94.0% | 0.99 | 0.96 | EUM-320S250Bx |
| 285-5000mA | 2850-5000mA | 4900 mA | 90~305 Vac/ 127~300 Vdc | 32~112 Vdc | 320 W | 93.5% | 0.99 | 0.96 | EUM-320S500Bx ⁽⁴⁾ |
| 535-7600mA | 5350-7600mA | 6700 mA | 90~305 Vac/ 127~300 Vdc | 21 ~ 60 Vdc | 320 W | 92.5% | 0.99 | 0.96 | EUM-320S760Bx ⁽⁴⁾ |

- Notes:** (1) Output current range with constant power at 320W.
 (2) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac.
 (3) Measured at 100% load and 220Vac input (see below "General Specifications" for details).
 (4) SELV Output.

(5) x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models; x = B are BIS models.

I-V Operation Area

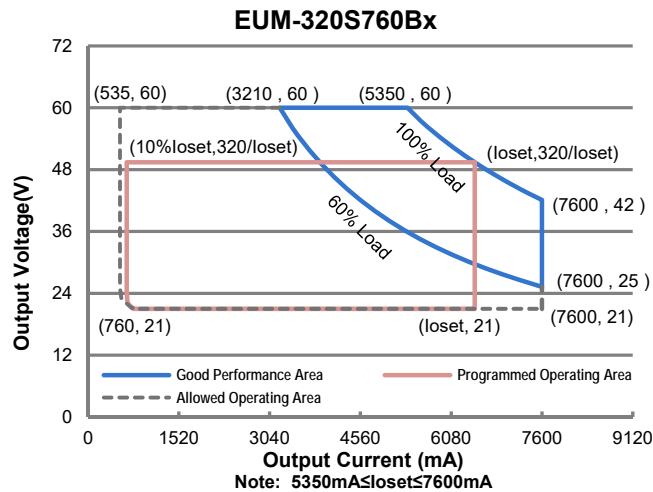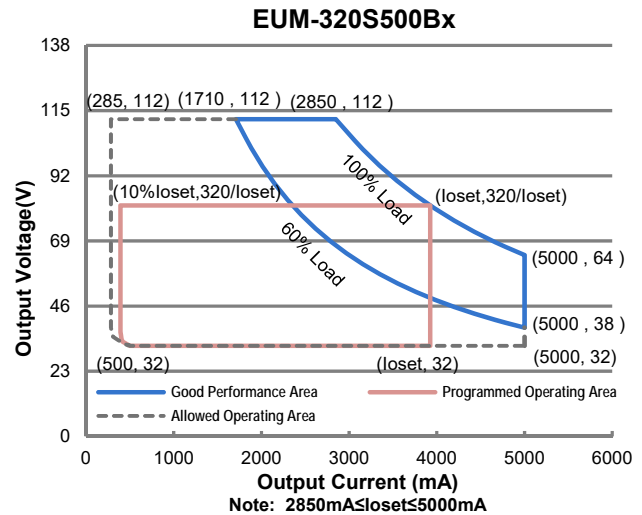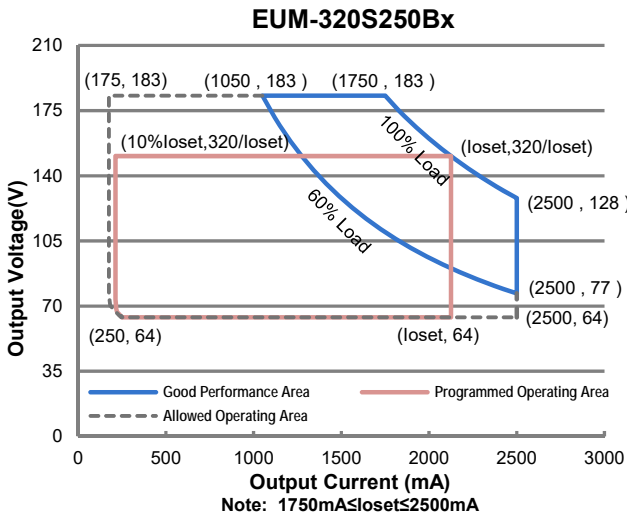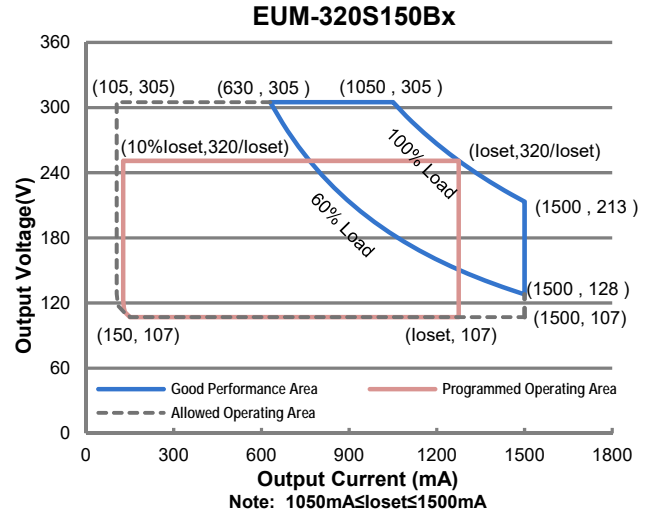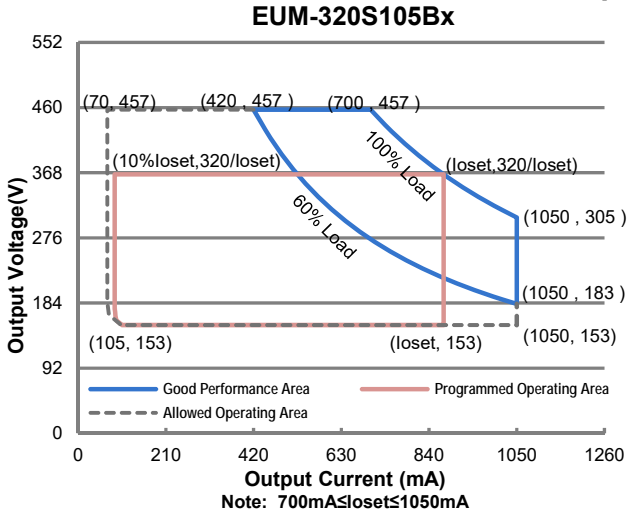

Input Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|----------------------------------|---------|------|-----------------------|---|
| Input AC Voltage | 90 Vac | - | 305 Vac | |
| Input DC Voltage | 127 Vdc | - | 300 Vdc | |
| Input Frequency | 47 Hz | - | 63 Hz | |
| Leakage Current | - | - | 0.75 MIU | UL8750; 277Vac/ 60Hz |
| | - | - | 0.70 mA | IEC60598-1; 240Vac/ 60Hz, |
| Input AC Current | - | - | 3.29 A | Measured at 100% load and 120 Vac input. |
| | - | - | 1.77 A | Measured at 100% load and 220 Vac input. |
| Inrush Current(I _{2t}) | - | - | 0.77 A ² s | At 220Vac input, 25°C cold start, duration=6.72 ms, 10%I _{pk} -10%I _{pk} . See Inrush Current Waveform for the details. |
| PF | 0.9 | - | - | At 100-277Vac, 50-60Hz, 60%-100% Load (192-320W) |
| THD | - | - | 20% | |
| THD | - | - | 10% | At 220-240Vac, 50-60Hz, 75%-100% Load (240-320W) |

Output Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|--|----------|---------------------|----------------------|---|
| Output Current Tolerance | -5%loset | - | 5%loset | At 100% load condition |
| Output Current Setting(loset) Range | | | | |
| EUM-320S105Bx | 70 mA | - | 1050 mA | |
| EUM-320S150Bx | 105 mA | - | 1500 mA | |
| EUM-320S250Bx | 175 mA | - | 2500 mA | |
| EUM-320S500Bx | 285 mA | - | 5000 mA | |
| EUM-320S760Bx | 535 mA | - | 7600 mA | |
| Output Current Setting Range with Constant Power | | | | |
| EUM-320S105Bx | 700 mA | - | 1050 mA | |
| EUM-320S150Bx | 1050 mA | - | 1500 mA | |
| EUM-320S250Bx | 1750 mA | - | 2500 mA | |
| EUM-320S500Bx | 2850 mA | - | 5000 mA | |
| EUM-320S760Bx | 5350 mA | - | 7600 mA | |
| Total Output Current Ripple (pk-pk) | - | 5%I _{omax} | 10%I _{omax} | At 100% load condition. 20 MHz BW |
| Output Current Ripple at < 200 Hz (pk-pk) | - | 2%I _{omax} | - | At 100% load condition. Only this component of ripple is associated with visible flicker. |
| Startup Overshoot Current | - | - | 10%I _{omax} | At 100% load condition |
| No Load Output Voltage | | | | |
| EUM-320S105Bx | - | - | 550 V | |
| EUM-320S150Bx | - | - | 380 V | |
| EUM-320S250Bx | - | - | 230 V | |
| EUM-320S500Bx | - | - | 120 V | |
| EUM-320S760Bx | - | - | 70 V | |
| Line Regulation | - | - | ±0.5% | Measured at 100% load |

Output Specifications (Continued)

| Parameter | Min. | Typ. | Max. | Notes |
|---|--------|----------|--------|---|
| Load Regulation | - | - | ±3.0% | |
| Turn-on Delay Time | - | - | 0.5 s | Measured at all dimming modes except DALI-2, and 120-277Vac input, 60%-100% Load |
| | - | - | 1.0 s | Measured at DALI-2 dimming mode, and 120-277Vac input, 60%-100% Load |
| Temperature Coefficient of Isot | - | 0.03%/°C | - | Case temperature = 0°C ~Tc max |
| 24V Auxiliary Output Voltage | 21.6 V | 24 V | 26.4 V | |
| 24V Auxiliary Output Source Current | 0 mA | - | 125 mA | Return terminal is "DA-" |
| 24V Auxiliary Output Transient Peak Current@6W | - | - | 250 mA | 250mA peak for a maximum duration of 2.2ms in a 6.0ms period during which time the average should not exceed 125mA. |
| 24V Auxiliary Output Transient Peak Current@10W | - | - | 425 mA | 425mA peak for a maximum duration of 1.3ms in a 5.2ms period during which time the average should not exceed 125mA. |
| Integrated DALI-2 Bus Power Supply Voltage | 12 Vdc | 16 Vdc | 20 Vdc | Voltage is depending on loading. |
| Integrated DALI-2 Bus Power Supply Current | 50 mA | - | 60 mA | Return terminal is "DA-" |

- Note:** (1) DALI-2 bus power supply is enabled by default and can be disabled via programming interface.
 (2) DALI-2 bus power supply supports automatic shut-down and restart after short-circuit.

General Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|------------------------------|-------|-------|------|-------|
| Efficiency at 120 Vac input: | | | | |
| EUM-320S105Bx | | | | |
| Io= 700 mA | 90.0% | 92.0% | - | |
| Io=1050 mA | 90.0% | 92.0% | - | |
| EUM-320S150Bx | | | | |
| Io=1050 mA | 90.0% | 92.0% | - | |
| Io=1500 mA | 90.0% | 92.0% | - | |
| EUM-320S250Bx | | | | |
| Io=1750 mA | 90.0% | 92.0% | - | |
| Io=2500 mA | 90.0% | 92.0% | - | |
| EUM-320S500Bx | | | | |
| Io=2850 mA | 89.5% | 91.5% | - | |
| Io=5000 mA | 88.0% | 90.0% | - | |
| EUM-320S760Bx | | | | |
| Io=5350 mA | 88.5% | 90.5% | - | |
| Io=7600 mA | 88.0% | 90.0% | - | |

General Specifications (Continued)

| Parameter | Min. | Typ. | Max. | Notes |
|---|---------------------------------------|---------------|-------|---|
| Efficiency at 220 Vac input: EUM-320S105Bx | | | | Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| I _o = 700 mA | 92.5% | 94.5% | - | |
| I _o =1050 mA | 92.5% | 94.5% | - | |
| EUM-320S150Bx | | | | |
| I _o =1050 mA | 92.0% | 94.0% | - | |
| I _o =1500 mA | 92.0% | 94.0% | - | |
| EUM-320S250Bx | | | | |
| I _o =1750 mA | 92.0% | 94.0% | - | |
| I _o =2500 mA | 92.0% | 94.0% | - | |
| EUM-320S500Bx | | | | |
| I _o =2850 mA | 91.5% | 93.5% | - | |
| I _o =5000 mA | 90.0% | 92.0% | - | |
| EUM-320S760Bx | | | | |
| I _o =5350 mA | 90.5% | 92.5% | - | |
| I _o =7600 mA | 90.0% | 92.0% | - | |
| Efficiency at 277 Vac input: EUM-320S105Bx | | | | Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.) |
| I _o = 700 mA | 92.5% | 94.5% | - | |
| I _o =1050 mA | 92.5% | 94.5% | - | |
| EUM-320S150Bx | | | | |
| I _o =1050 mA | 92.5% | 94.5% | - | |
| I _o =1500 mA | 92.5% | 94.5% | - | |
| EUM-320S250Bx | | | | |
| I _o =1750 mA | 92.5% | 94.5% | - | |
| I _o =2500 mA | 92.5% | 94.5% | - | |
| EUM-320S500Bx | | | | |
| I _o =2850 mA | 92.0% | 94.0% | - | |
| I _o =5000 mA | 90.5% | 92.5% | - | |
| EUM-320S760Bx | | | | |
| I _o =5350 mA | 91.0% | 93.0% | - | |
| I _o =7600 mA | 90.0% | 92.0% | - | |
| Power Metering Accuracy | -1% | - | 1% | Measured at 220Vac input and 100%Load |
| Standby Power | - | - | 0.5 W | Measured at 230Vac/50Hz; Dimming off |
| MTBF | - | 231,000 Hours | - | Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F) |
| Lifetime | - | 112,000 Hours | - | Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details |
| Operating Case Temperature for Safety T _{c_s} | -40°C | - | +90°C | |
| Operating Case Temperature for Warranty T _{c_w} | -40°C | - | +75°C | Case temperature for 7 years warranty Humidity: 10% RH to 95% RH; |
| Storage Temperature | -40°C | - | +85°C | Humidity: 5%RH to 95%RH |
| Dimensions Inches (L × W × H) Millimeters (L × W × H) | 8.82 × 3.15 × 1.75 224 × 80 × 44.5 | | | With mounting ear 9.57 × 3.15 × 1.75 243 × 80 × 44.5 |
| Net Weight | - | 1520 g | - | |

Dimming Specifications

| Parameter | | Min. | Typ. | Max. | Notes |
|----------------------|---|---|------|-------|--|
| DA+, DA- High Level | | 9.5V | 16V | 22.5V | |
| DA+, DA- Low Level | | -6.5V | 0V | 6.5V | |
| DA+, DA- Current | | 0mA | - | 2mA | |
| Dimming Output Range | EUM-320S105Bx EUM-320S150Bx EUM-320S250Bx EUM-320S500Bx EUM-320S760Bx | 10%loset | - | loset | 700 mA ≤ loset ≤ 1050 mA 1050 mA ≤ loset ≤ 1500 mA 1750 mA ≤ loset ≤ 2500 mA 2850 mA ≤ loset ≤ 5000 mA 5350 mA ≤ loset ≤ 7600 mA |
| | EUM-320S105Bx EUM-320S150Bx EUM-320S250Bx EUM-320S500Bx EUM-320S760Bx | 70 mA 105 mA 175 mA 285 mA 535 mA | - | loset | 70 mA ≤ loset < 700 mA 105 mA ≤ loset < 1050 mA 175 mA ≤ loset < 1750 mA 285 mA ≤ loset < 2850 mA 535 mA ≤ loset < 5350 mA |

Safety & EMC Compliance

| Safety Category | Standard |
|--|---|
| UL/CUL | UL8750,CAN/CSA-C22.2 No. 250.13 |
| ENEC | EN 61347-1, EN 61347-2-13 |
| CE | EN 61347-1, EN 61347-2-13 EN 301 489-1 V2.2.3 EN 301 489-3 V2.1.1 EN 300 330 V2.1.1 EN 62479/EN 50663/EN 50665/EN 50364 |
| CB | IEC 61347-1, IEC 61347-2-13 |
| CCC | GB 19510.1, GB 19510.14 |
| KC | K 61347-1, K 61347-2-13 |
| PSE | J 61347-1, J 61347-2-13 |
| BIS | IS 15885(Part2/Sec13) |
| Global Mark | AS/NZS 61347.1, AS/NZS 61347.2.13 |
| EAC | ГОСТ Р МЭК 61347-1, ГОСТ IEC 61347-2-13 |
| NOM | NOM-058-SCFI |
| EMI Standards | Notes |
| EN 55015/GB 17743/KN 15 ⁽¹⁾ | Conducted emission Test & Radiated emission Test |
| EN 61000-3-2/GB 17625.1 | Harmonic current emissions |
| EN 61000-3-3 | Voltage fluctuations & flicker |


Safety & EMC Compliance (Continued)

| EMI Standards | Notes |
|----------------------------|---|
| FCC Part 15 ⁽¹⁾ | ANSI C63.4 Class B |
| | This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation. |
| EMS Standards | Notes |
| EN 61000-4-2 | Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge |
| EN 61000-4-3 | Radio-Frequency Electromagnetic Field Susceptibility Test-RS |
| EN 61000-4-4 | Electrical Fast Transient / Burst-EFT |
| EN 61000-4-5 | Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV |
| EN 61000-4-6 | Conducted Radio Frequency Disturbances Test-CS |
| EN 61000-4-8 | Power Frequency Magnetic Field Test |
| EN 61000-4-11 | Voltage Dips |
| EN 61547 | Electromagnetic Immunity Requirements Applies To Lighting Equipment |
| DALI-2 Standards | Notes |
| DALI-2 ⁽²⁾ | IEC 62386-101, -102 & -207 |


Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) DALI parts: 101, 102, 150, 207, 250, 251, 252, 253.


Derating

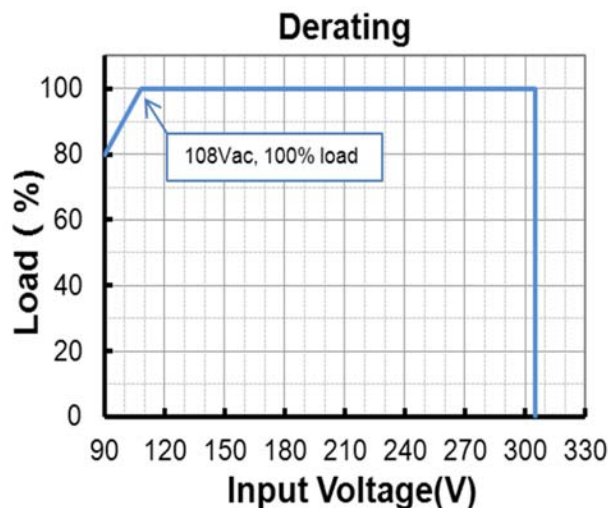



Lifetime vs. Case Temperature






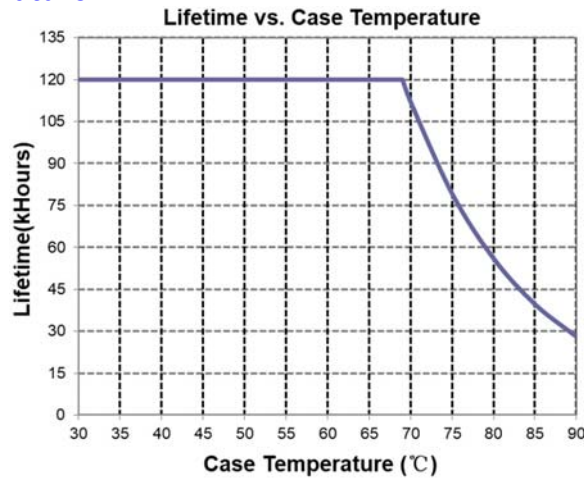




Inrush Current Waveform

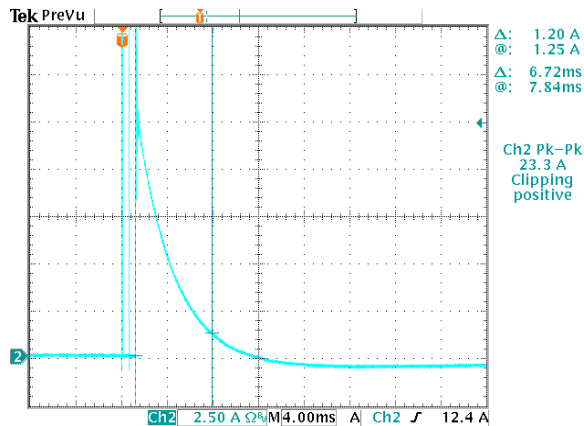


Efficiency vs. Load

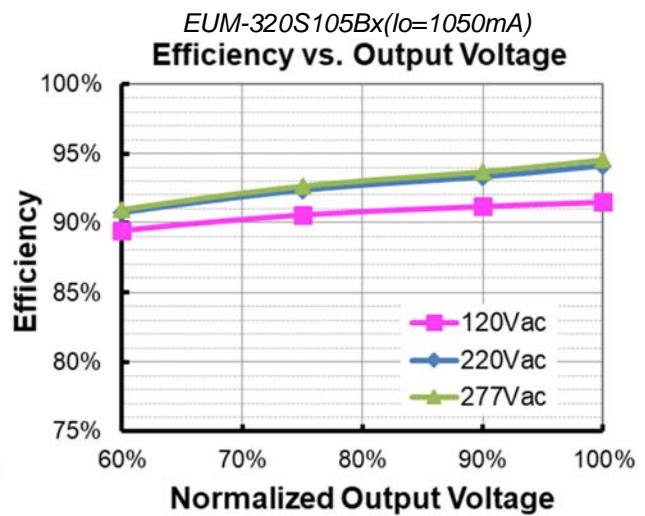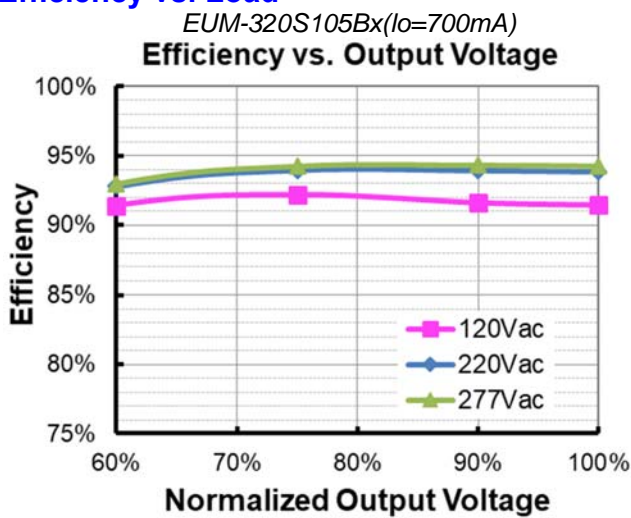

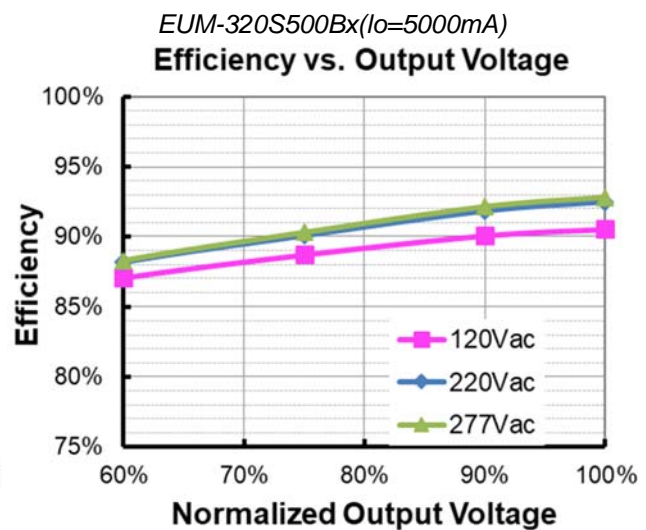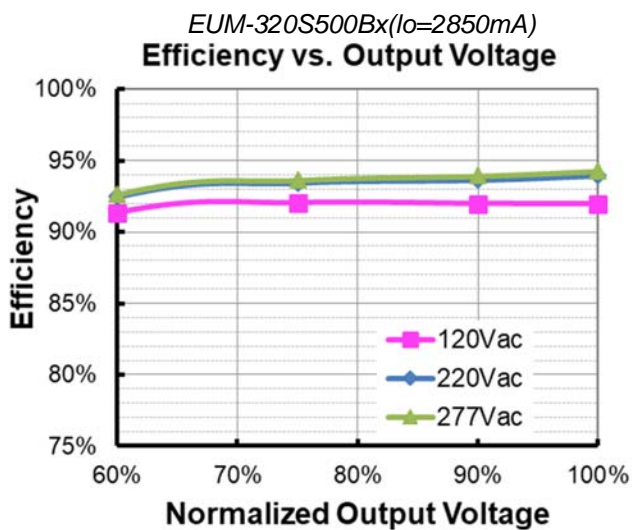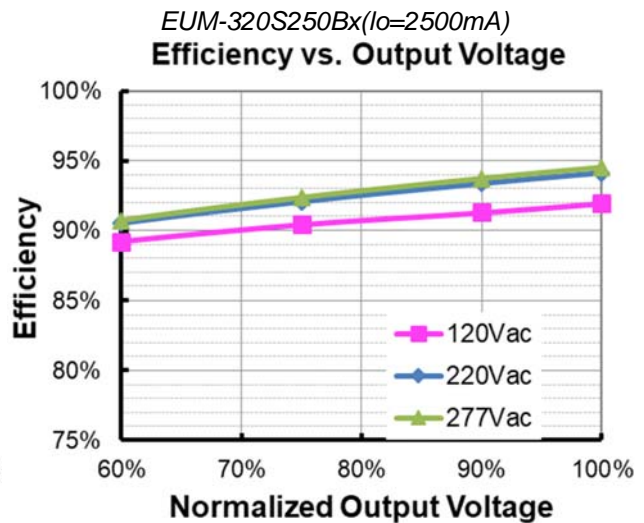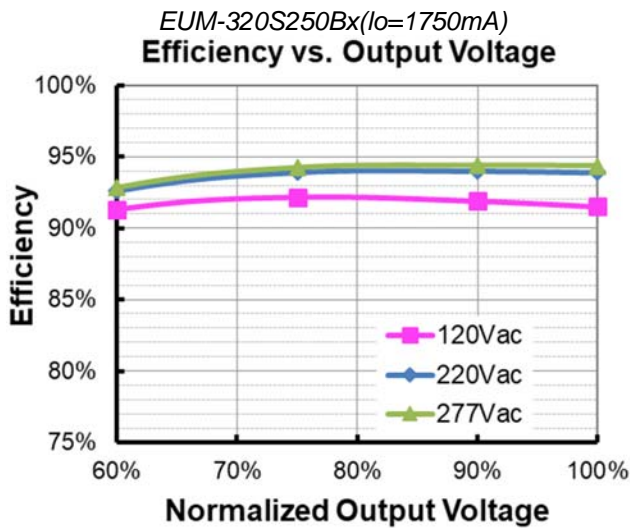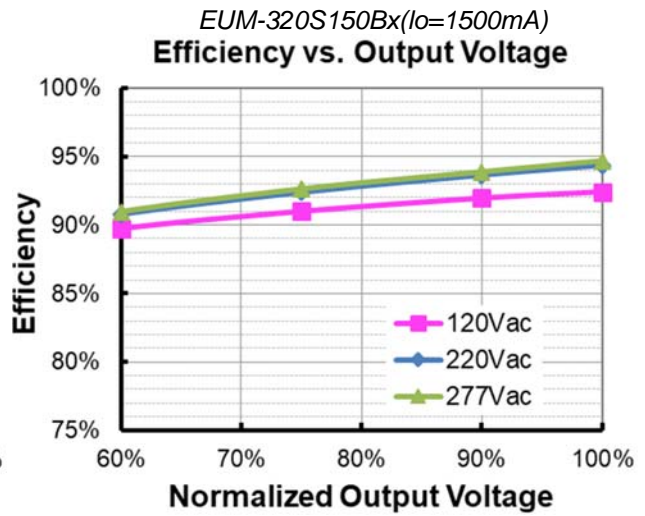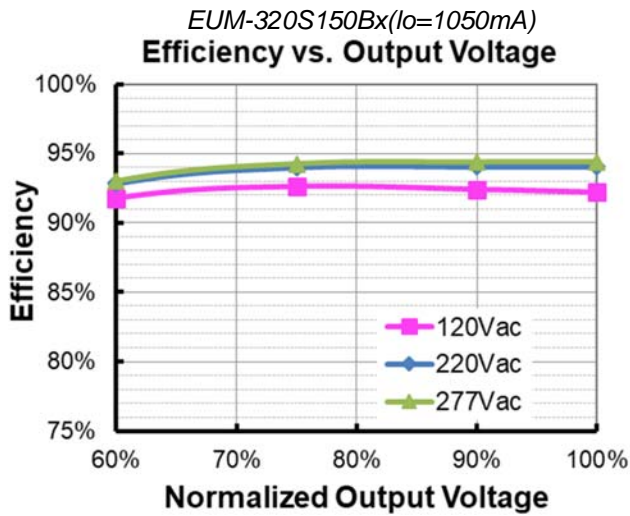


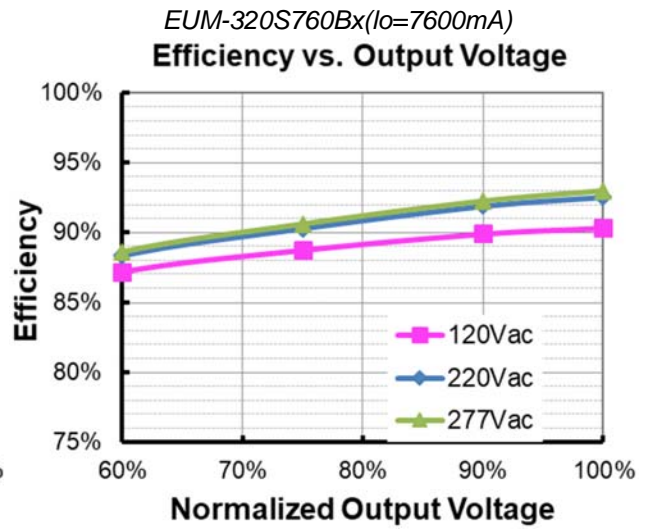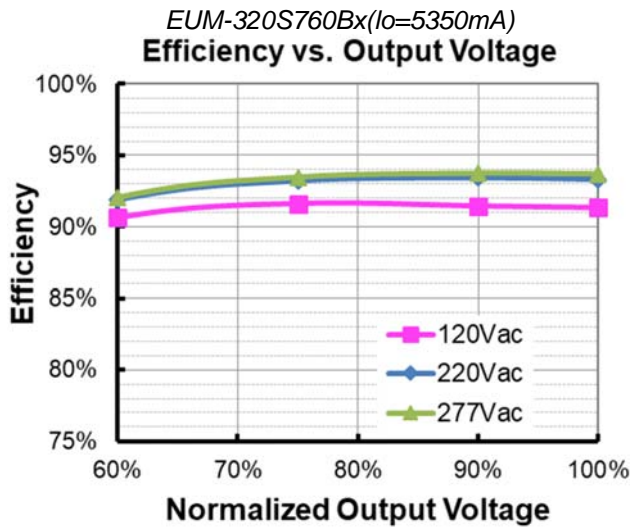

Power Factor

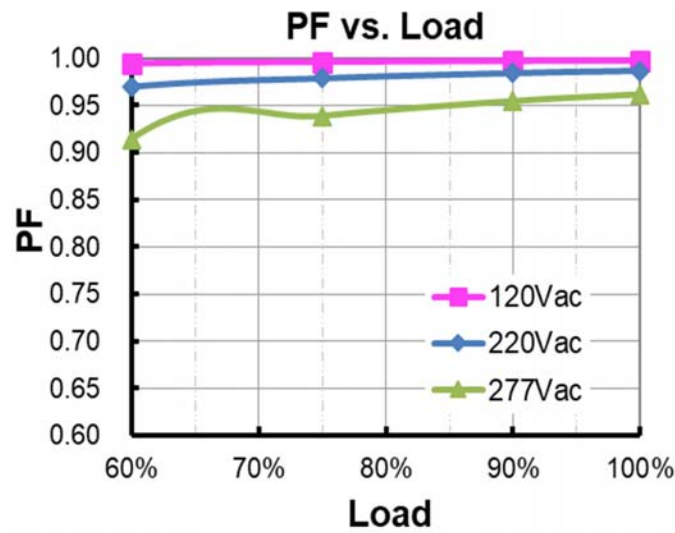

Total Harmonic Distortion

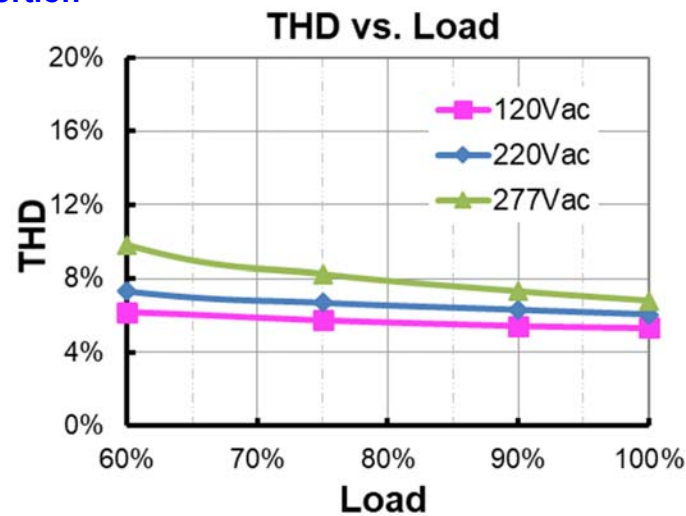


Protection Functions


| Parameter | | Min. | Typ. | Max. | Notes |
|---------------------------------------|--------------------------------|--|-----------|---|---|
| External Thermal Protection | R1 (Start derating) | - | 1.67 kΩ | - | The output current starts to decrease linearly when the actual NTC resistance value is lower than R1, until R2 is reached. |
| | R2 (Stop derating) | - | 1.27 kΩ | - | When the actual NTC resistance value is lower than R2, the output current will stay at the programmed Protection Current Floor. |
| | Protection Current Floor | 10%loset | 20%loset | 100%loset | 10%loset > I _{omin} (default setting is 20%) |
| I _{omin} | | 20%loset | 100%loset | 10%loset ≤ I _{omin} (default setting is 20%) | |
| Over Temperature Protection | | Decreases output current, returning to normal after over temperature is removed. | | | |
| Short Circuit Protection | | Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed. | | | |
| Over Voltage Protection | | Limits output voltage at no load and in case the normal voltage limit fails. | | | |
| Input Under Voltage Protection (IUVP) | Input Under Voltage Protection | 70 Vac | 80 Vac | 90 Vac | Turn off the output when the input voltage falls below protection voltage. |
| | Input Under Voltage Recovery | 75 Vac | 85 Vac | 95 Vac | Auto Recovery. The driver will restart when |
| Input Over Voltage Protection | Input Over Voltage Protection | 310 Vac | 320 Vac | 330 Vac | Turn off the output when the input voltage exceeds protection voltage. |
| | Input Over Voltage Recovery | 300 Vac | 310 Vac | 320 Vac | Auto Recovery. The driver will restart when the input voltage falls below recovery voltage. |
| | Max. of Input Over Voltage | - | - | 350 Vac | The driver can survive stabilized input over voltage conditions up to 350Vac for a total of 8 hours. |

Note: (1) The recommended NTC type is 10kΩ NTC, Murata NCP18XH103J03RB.

● Input Under Voltage Protection Diagram

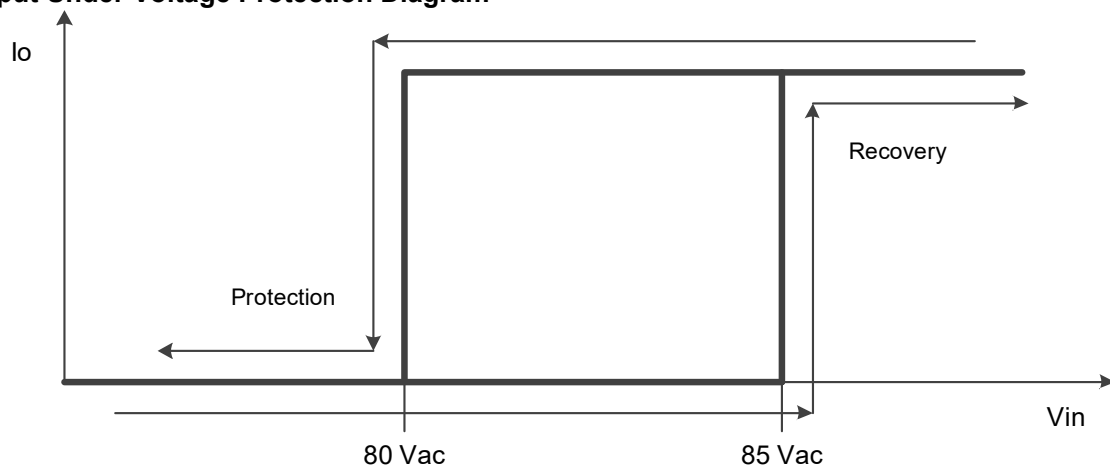




● **Input Over Voltage Protection Diagram**

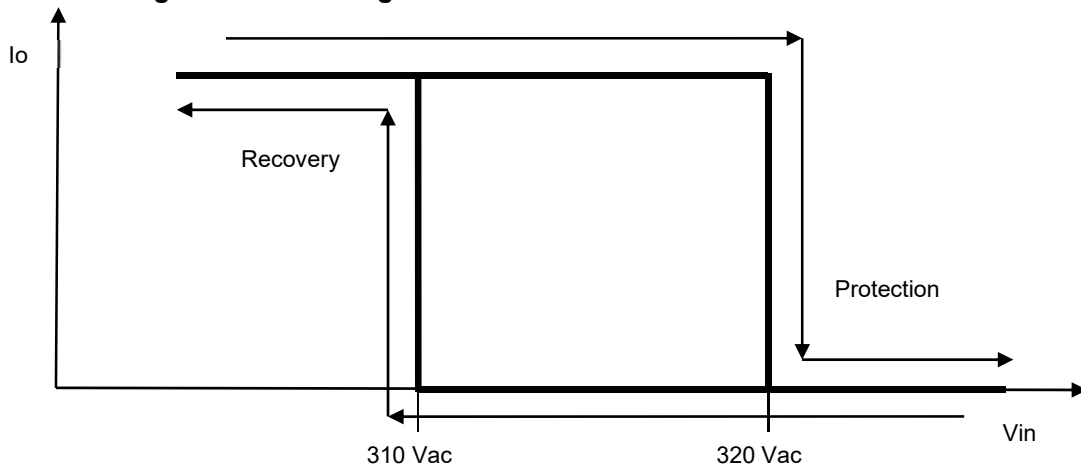

Dimming

● **DALI-2 Dimming**

The recommended implementation of the dimming control is provided below.

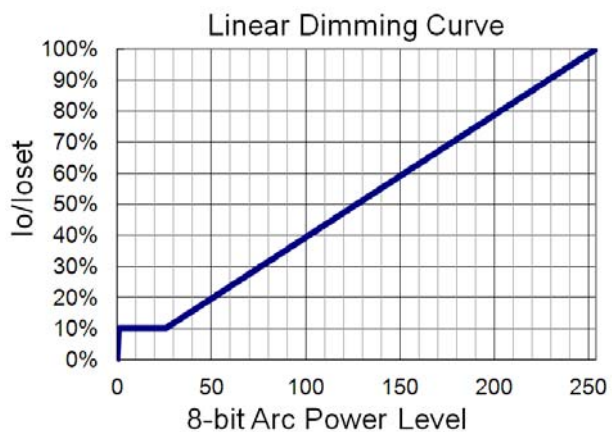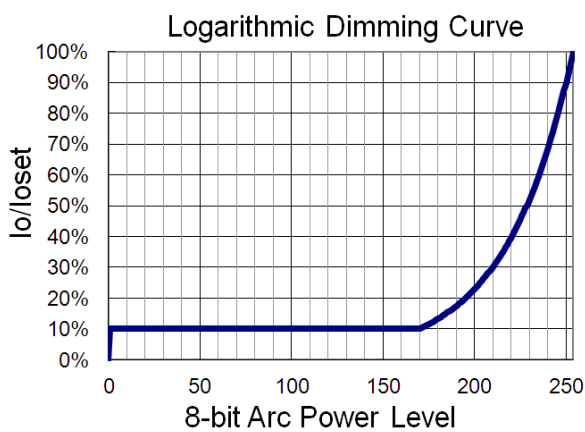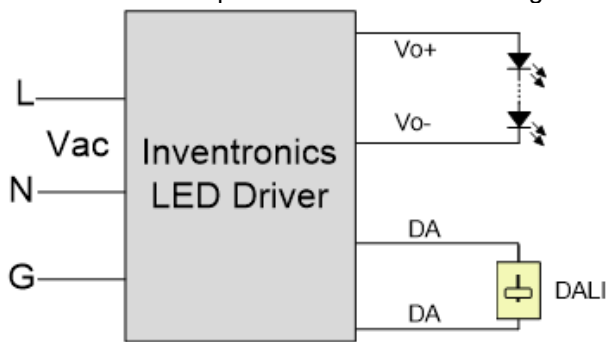

Implementation: DALI-2 Dimming

● Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.


● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

● End Of Life

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued.

Programming Connection Diagram

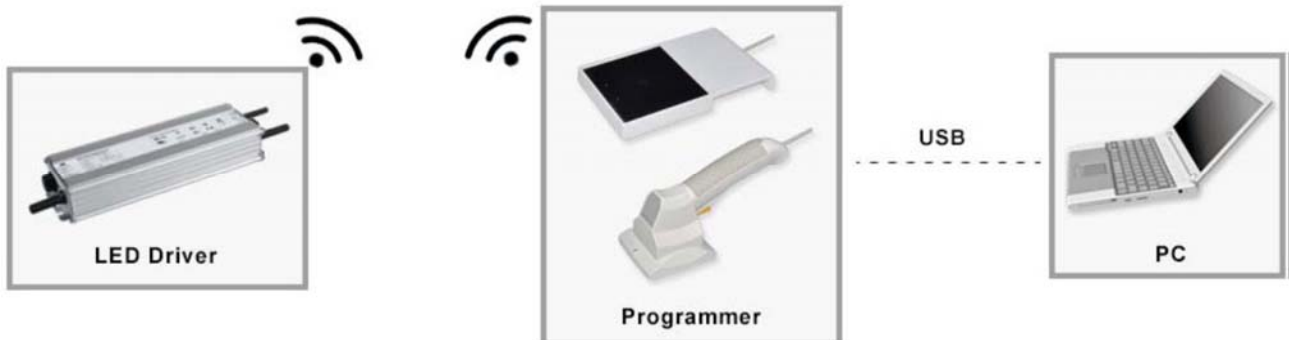

Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-NFC-H](#) or [PRG-NFC-D](#) (Programmer) datasheet for details.

Mechanical Outline

EUM-320S105(150)BG

INPUT(UL SJOW 17AWG/3C & VDE H05RN-F 3*1.0mm² Ø 8.3)


Dimming Wire(UL21996 22AWG/3C Ø 5.0)

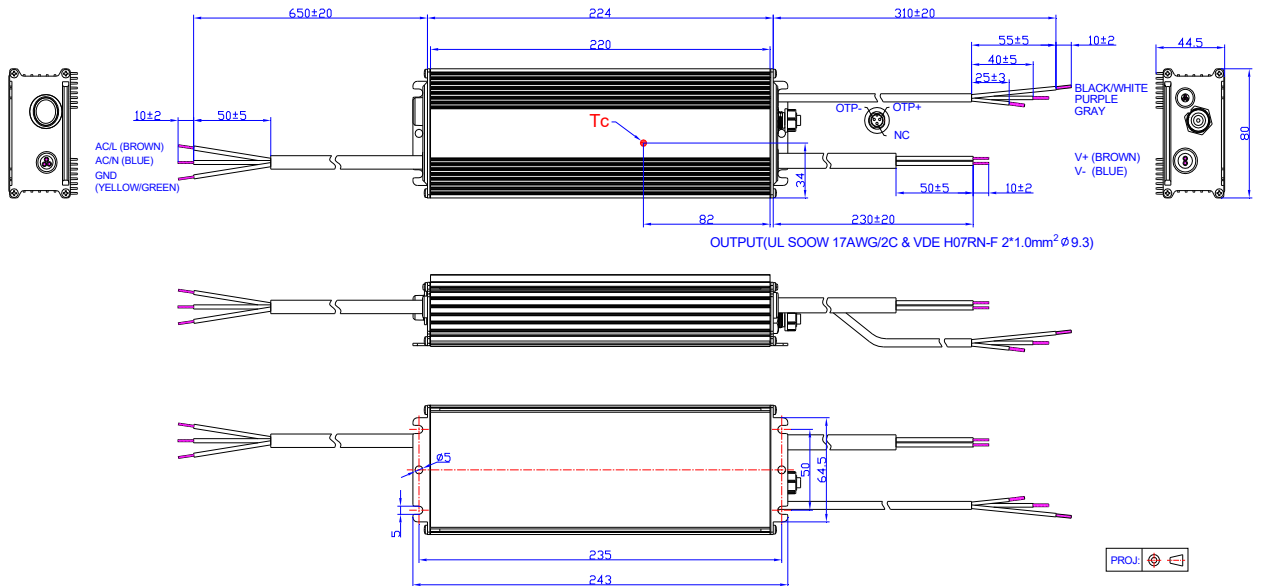

EUM-320S250(500&760)BG

INPUT(UL SJOW 17AWG/3C & VDE H05RN-F 3*1.0mm² Ø 8.3)


Dimming Wire(UL21996 22AWG/3C Ø 5.0)

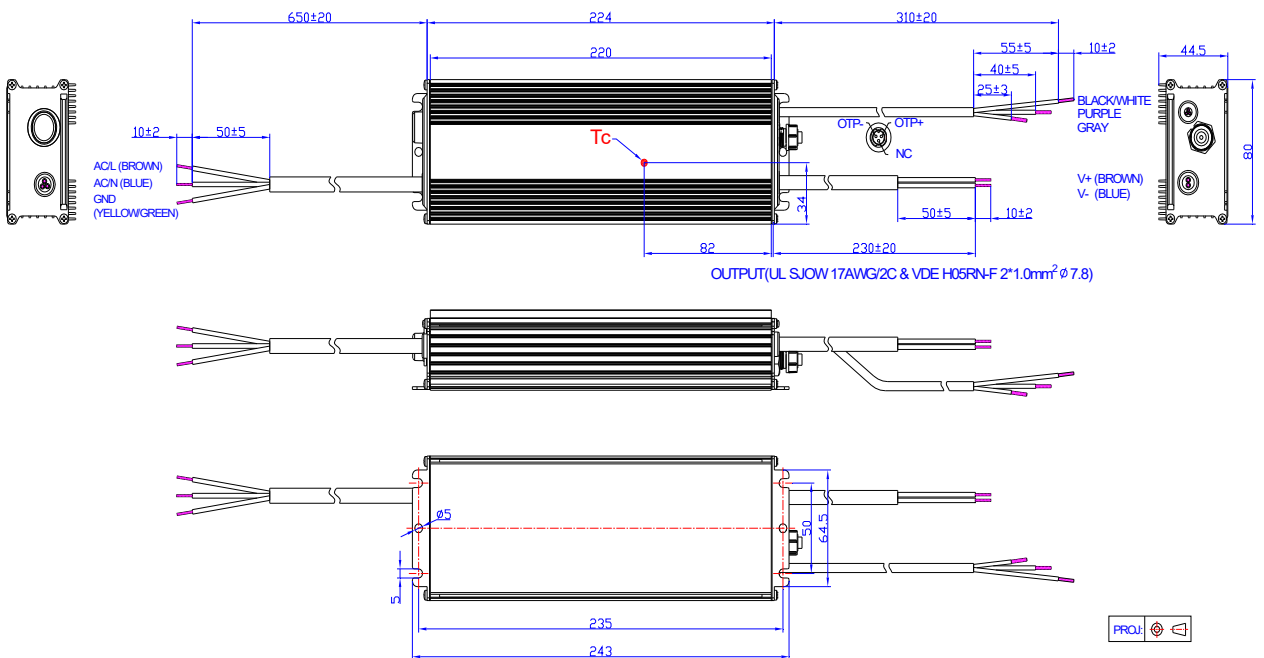

EUM-320S105(150)BT

INPUT(UL S.JTW 18AWG/3C ϕ 7.8)

Dimming Wire(UL21996 22AWG/3C ϕ 5.0)

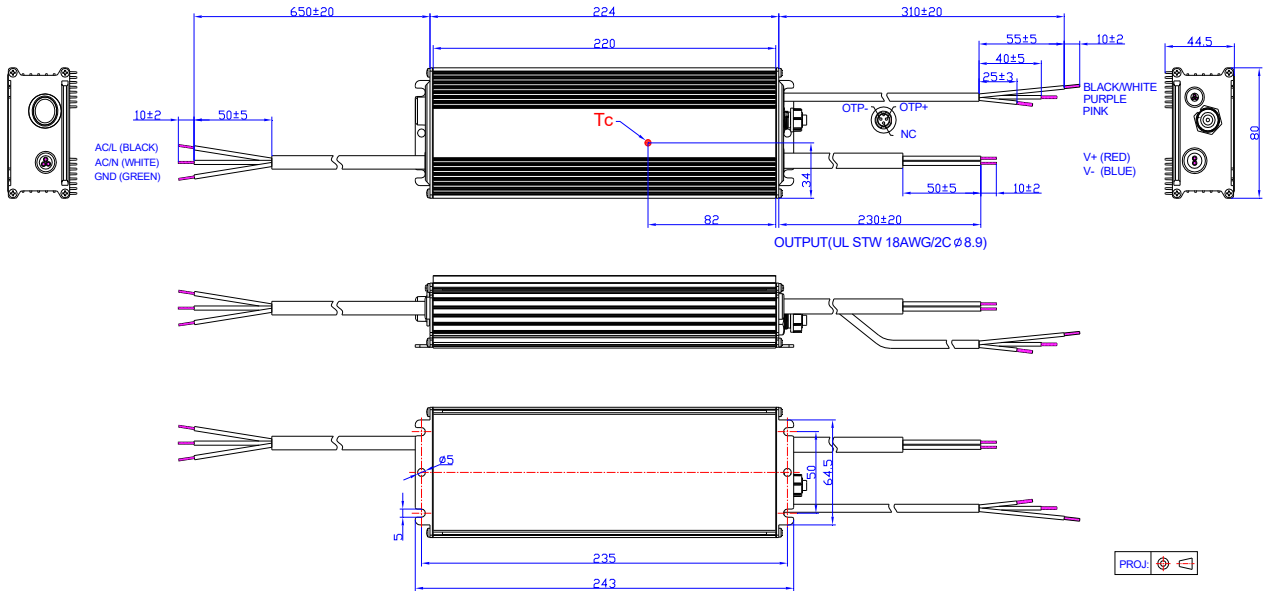


Unspecified tolerance:±1

EUM-320S250(500&760)BT


INPUT(UL S.JTW 18AWG/3C ϕ 7.8)

Dimming Wire(UL21996 22AWG/3C ϕ 5.0)

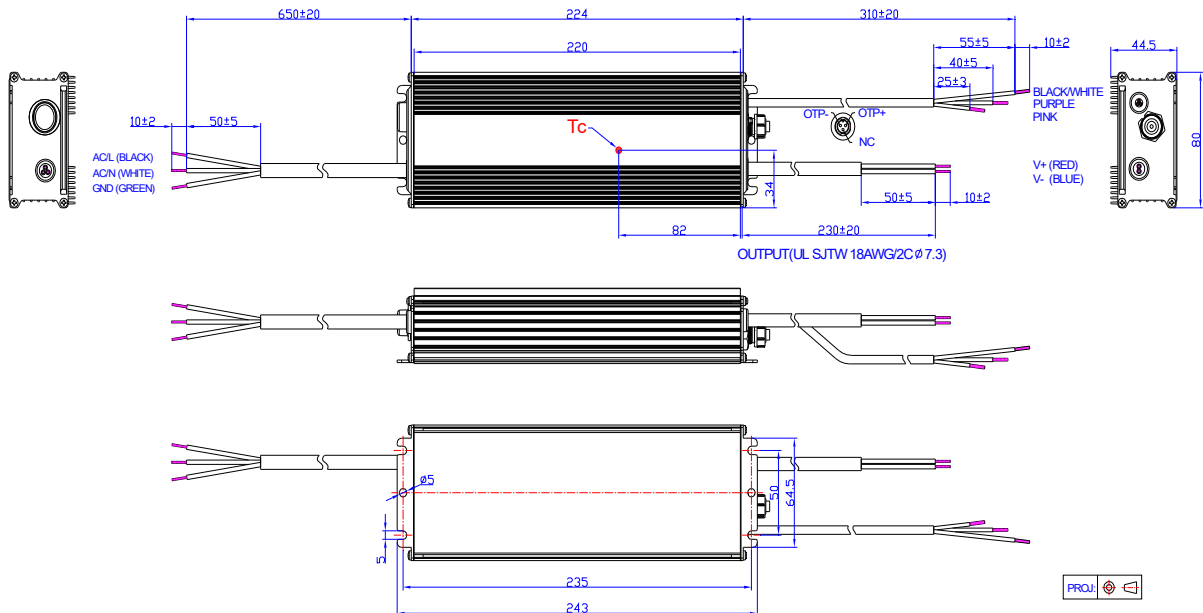

Unspecified tolerance:±1

EUM-320SxxxBB

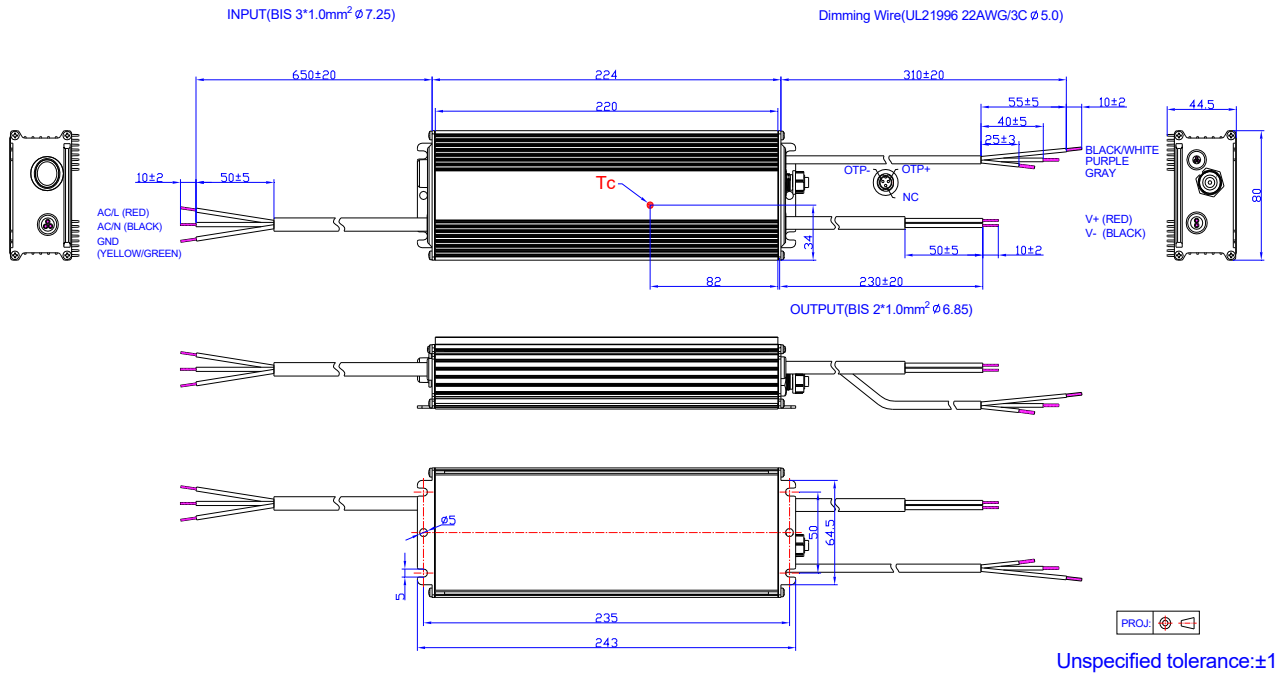

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products..

Revision History

| Change Date | Rev. | Description of Change | | |
|-------------|------|-----------------------|------|----|
| | | Item | From | To |
| 2021-09-10 | A | Datasheets Release | / | / |