

Features

- Low THD, 10% Max up to 240 Vac
- Compact Metal Case with Excellent Thermal Performance
- Input Surge Protection: 4kV line-line, 6kV line-earth
- High Reliability & Long Lifetime: 84,000 Hrs. at 70°C Case Temperature
- Suitable for Built-in Use and Class I Luminaires
- Input UVP
- Waterproof (IP66) and UL Dry / Damp Location
- SELV Output
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty



Description

The EUC-026SxxxSTM000x series is a 26W, constant-current IP66 LED driver that operates from 90-305 Vac input with excellent power factor and THD feature. It is created for low bay, tunnel and street lights. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, output over voltage, short circuit, and over temperature.

Models

Output Current	Input Voltage Range(1)	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number(3)
					120 Vac	220 Vac	
350 mA	90 ~ 305 Vac	37 ~ 74 Vdc	26 W	88.5%	0.99	0.96	EUC-026S050STM0003
500 mA	90 ~ 305 Vac	26 ~ 52 Vdc	26 W	88.0%	0.99	0.96	EUC-026S070STM0004
600 mA	90 ~ 305 Vac	22 ~ 43 Vdc	26 W	88.0%	0.99	0.96	EUC-026S070STM0002
700 mA	90 ~ 305 Vac	20 ~ 37 Vdc	26 W	87.0%	0.99	0.96	EUC-026S070STM

Notes: (1) UL, FCC certified input voltage range: 120-277Vac; other certified input voltage range except UL & FCC: 120-240Vac.

(2) Measured at full load and 220 Vac input.

(3) SELV Output.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Leakage Current	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	0.35 A	Measured at full load and 120 Vac input.
	-	-	0.25 A	Measured at full load and 220 Vac input.
Inrush Current(I ² t)	-	-	0.09 A ² s	At 220Vac input, 25°C cold start, duration=296 μs, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
Power Factor	0.90	-	-	120-277Vac,75%-100%Load(19.5~26W)
THD	-	-	15%	
THD	-	-	10%	120-240Vac,75%-100%Load(19.5~26W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-8%lo	-	8%lo	At full load condition
Total Output Current Ripple (pk-avg)	-	50%lo	75%lo	At full load condition
Startup Overshoot Current	-	5%lo	10%lo	At full load condition
No Load Output Voltage	-	-	100 V	
EUC-026S050STM0003	-	-	67 V	
EUC-026S070STM0004	-	-	67 V	
EUC-026S070STM0002	-	-	67 V	
EUC-026S070STM	-	-	67 V	
Line Regulation	-	-	±5.0%	Measured at full load
Load Regulation	-	-	±5.0%	
Turn-on Delay Time	-	1.5 s	2.0 s	Measured at 120Vac input, 75%-100%Load.
	-	1.0 s	1.5 s	Measured at 220Vac input, 75%-100%Load.
Temperature Coefficient of Iomax	-	0.08%/°C	-	Case temperature = 0°C ~Tc max

Note: All specifications are tested by Cree XLamp XP-G and typical measured at 220Vac and 25°C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input:				Measured at full load and steady-state temperature in 25°C ambient. (Efficiency will be about 1.0% lower if measured immediately after startup.)
EUC-026S050STM0003	87.0%	88.0%	-	
EUC-026S070STM0004	86.0%	87.0%	-	
EUC-026S070STM0002	86.0%	87.0%	-	
EUC-026S070STM	85.5%	86.5%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 220 Vac input: EUC-026S050STM0003 EUC-026S070STM0004 EUC-026S070STM0002 EUC-026S070STM	87.5% 87.0% 87.0% 86.0%	88.5% 88.0% 88.0% 87.0%	- - - -	Measured at full load and steady-state temperature in 25°C ambient. (Efficiency will be about 1.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: EUC-026S050STM0003 EUC-026S070STM0004 EUC-026S070STM0002 EUC-026S070STM	86.5% 86.0% 86.0% 85.5%	87.5% 87.0% 87.0% 86.5%	- - - -	Measured at full load and steady-state temperature in 25°C ambient. (Efficiency will be about 1.0% lower if measured immediately after startup.)
MTBF	-	1610,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	84,000 Hours	-	Measured at 120Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40 °C	-	+85 °C	
Operating Case Temperature for Warranty Tc_w	-40 °C	-	+75 °C	Case temperature for 5 years warranty. Humidity: 10% RH to 100% RH.
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH
Dimensions Inches (L x W x H) Millimeters (L x W x H)	3.15 x 2.52 x 1.26 80 x 64 x 32			With mounting ear 3.82 x 2.52 x 1.26 97 x 64 x 32
Net Weight	-	330 g	-	

Note: All specifications are tested by Cree XLamp XP-G and typical at 25°C unless otherwise stated.

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750, CAN/CSA-C22.2 No. 250.13-12
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker

Safety & EMC Compliance (Continued)


EMI Standards	Notes
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

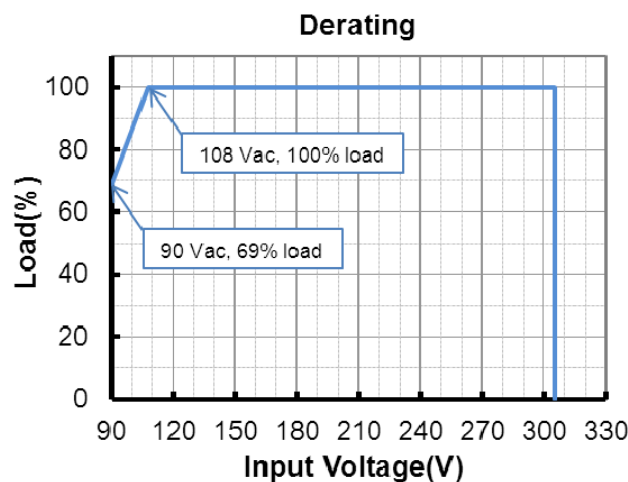

Lifetime vs. Case Temperature

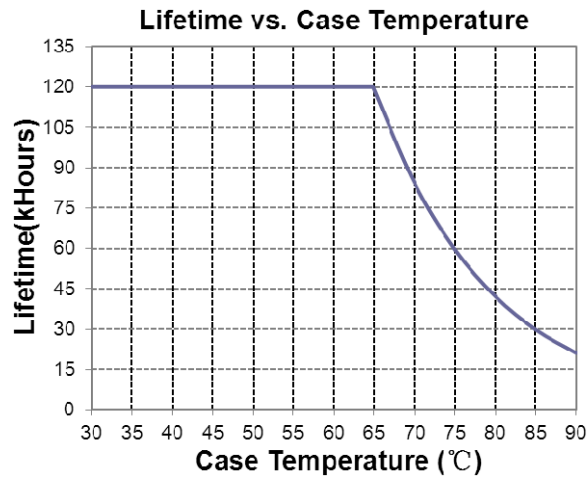


Inrush Current Waveform

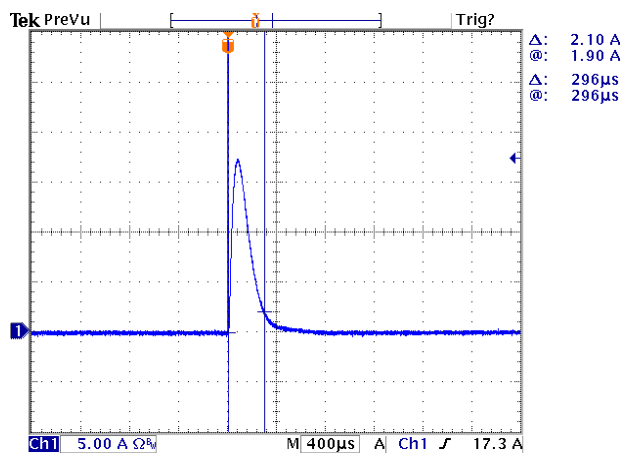

Efficiency vs. Load


EUC-026S050STM0003 (I_o=350mA)

Efficiency vs. Output Voltage

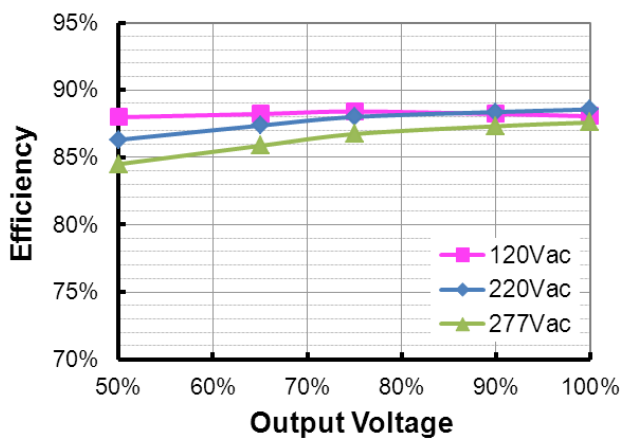


EUC-026S070STM (I_o=700mA)

Efficiency vs. Output Voltage

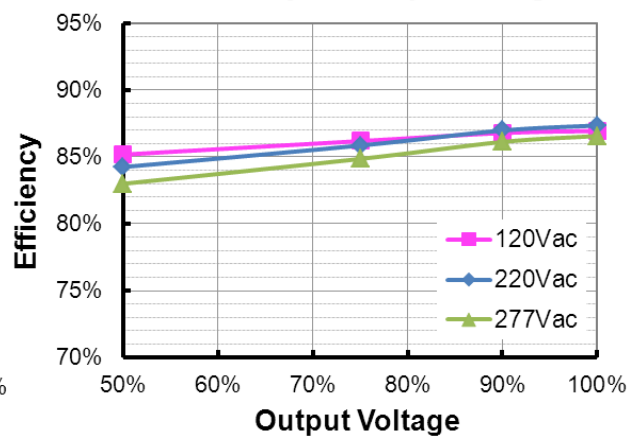


EUC-026S070STM0002 (Io=600mA)

Efficiency vs. Output Voltage

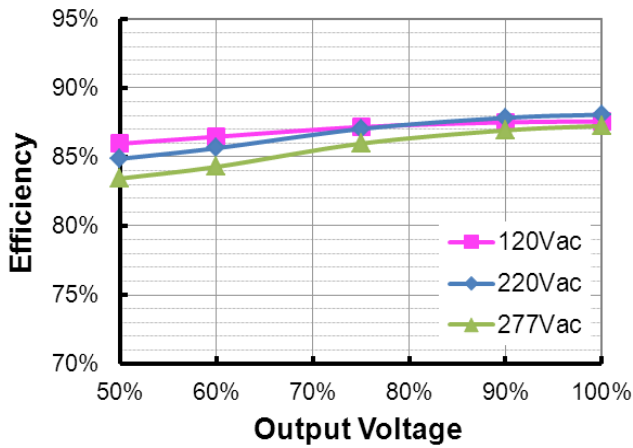


EUC-026S070STM0004 (Io=500mA)

Efficiency vs. Output Voltage

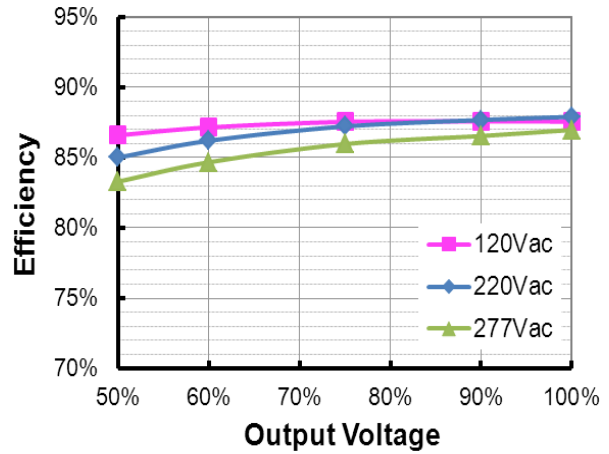


Power Factor

PF vs. Load

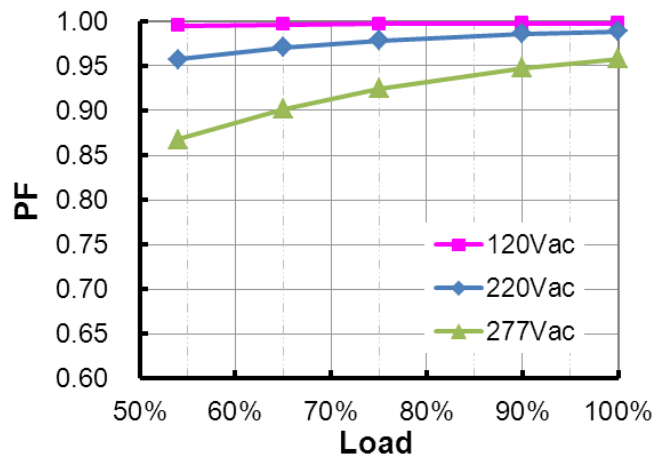

Total Harmonic Distortion


THD vs. Load

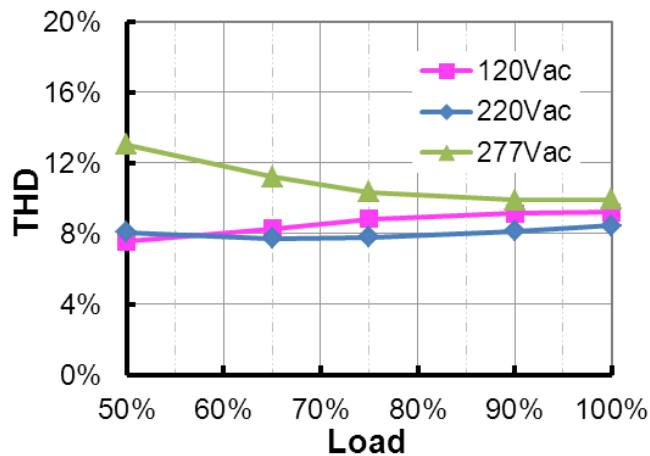

Protection Functions

Parameter	Notes
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.
Short Circuit Protection	Auto Recovery. No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection	Decreases output current. Returning to normal after over temperature is removed.
Input Under Voltage Protection	Auto Recovery. Turn off the output when the input voltage falls below $80\pm 10V$. And the driver will restart when the input voltage exceeds $85\pm 10V$.

Mechanical Outline

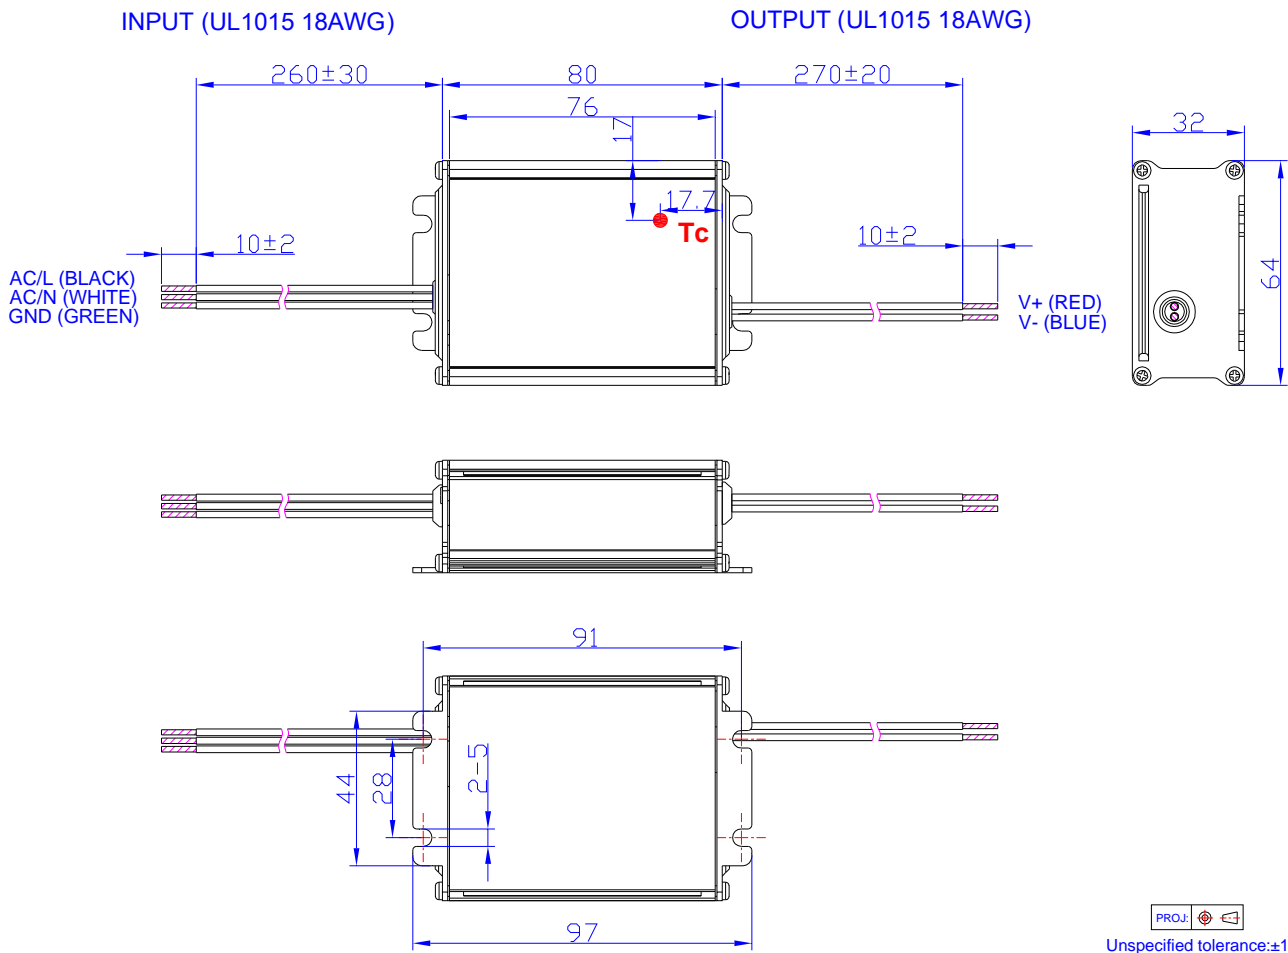

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-07-30	A	Datasheet Release	/	/
2016-01-28	B	KS Certificate	/	Added
		Models-EUC-026S050STM	/	Added
		Max Input AC Current at full load and 120 Vac input	0.3 A	0.35 A
		Max Input AC Current at full load and 220 Vac input	0.2 A	0.25 A
		Inrush Current(I ² t)	0.08 A ² s	0.09 A ² s
		Load Regulation	±3.0%	±5.0%
		Temperature Coefficient of I _{omax}	0.06%/°C	0.08%/°C
		Lifetime	Min.=120,000 Hours at T _c =60°C	Typ.=84,000 Hours at T _c =70°C
		Net Weight	300 g	330 g
		Note of EMI Standard	/	Added
		Inrush Current Waveform	/	Updated
		PF Curve	/	Updated
		THD Curve	/	Updated
Mechanical Outline	/	Updated		
2016-04-18	C	KS Certificate Regulation	/	Added
2016-05-23	D	Mechanical Outline	/	Updated
2016-12-26	E	Input Voltage Range(Vac)	108 ~ 305 Vac	90 ~ 305 Vac
		Input Voltage Range(Vdc)	127 ~ 300 Vdc	Deleted
		Model Number - EUC-026S070STM(I _o =700mA)	EUC-026S070STM0000	EUC-026S070STM
		Total Output Current Ripple	Total Output Current Ripple (pk-pk) Max.= 150%I _o	Total Output Current Ripple (pk-avg) Max.= 75%I _o
		FCC Certificate Regulation	/	Added
		Derating Curve	/	Added
2017-03-21	F	Features	/	Updated
		Description	/	Updated
		MTBF	Min.=600,000Hours	Typ.=1610,000 Hours
		Protection Functions - Input Under Voltage Protection	/	Added