

Features

- High Efficiency (Up to 90%)
- Second Generation with Improved Performance
- Active Power Factor Correction (Typical 0.95)
- Constant Current Output
- IP66 and UL Dry / Damp Location
- Dimming Control
- All-Around Protection: OVP, SCP,OLP,OTP
- SELV and Class 2
- UL Type TL (Temperature Limited)



Description

The EUC-042SxxxDS(PS) series operates from a 90 ~ 305 Vac input range. They are designed to be highly efficient and highly reliable. Features include dimming control, over voltage protection, short circuit protection, over load protection, and over temperature protection.

Models

Output Current	Input Voltage Range(1)	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Typical Power Factor		Model Number
					120Vac	220Vac	
350 mA	90 ~ 305 Vac	60~120Vdc	42 W	90.0%	0.96	0.95	EUC-042S035DS(PS) ⁽³⁾
450 mA	90 ~ 305 Vac	47~94 Vdc	42 W	89.0%	0.96	0.95	EUC-042S045DS(PS) ⁽³⁾
530 mA	90 ~ 305 Vac	40~79 Vdc	42 W	89.0%	0.96	0.95	EUC-042S053DS(PS) ⁽³⁾
700 mA	90 ~ 305 Vac	28~56 Vdc	39 W	89.0%	0.96	0.95	EUC-042S070DS(PS) ⁽⁴⁾
1050 mA	90 ~ 305 Vac	20~38 Vdc	40 W	88.0%	0.96	0.95	EUC-042S105DS(PS) ⁽⁵⁾
1280 mA	90 ~ 305 Vac	17~32 Vdc	42 W	87.0%	0.96	0.95	EUC-042S128DS(PS) ⁽⁵⁾
1400 mA	90 ~ 305 Vac	15~30 Vdc	42 W	87.0%	0.96	0.95	EUC-042S140DS(PS) ⁽⁵⁾
1750 mA	90 ~ 305 Vac	12~24 Vdc	42 W	87.0%	0.96	0.95	EUC-042S175DS(PS) ⁽⁵⁾

Notes: (1) UL, FCC certified input voltage range: 100-277Vac; other certified input voltage range except UL, FCC: 100-240Vac.

(2) Measured at 100% load and 220 Vac input.

(3) Non-Class 2 output (USR & CNR).

(4) Class 2 output (USR), Non-Class 2 output (CNR).

(5) Class 2 output (USR & CNR).

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz
	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	0.7 A	Measured at 100% load and 100 Vac input.
	-	-	0.3 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	0.32 A ² s	At 220Vac input 25°C Cold Start. Duration=200 μ s, 10%I _{pk} -10%I _{pk} . See Inrush Current Waveform for the details.
Power Factor	0.90	-	-	At 100-277Vac, 50-60Hz,75%-100%load (31.5~42W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5% I _o	-	5% I _o	
No Load Output Voltage				
I _o = 350 mA	-	-	140 V	
I _o = 450 mA	-	-	104 V	
I _o = 530 mA	-	-	87 V	
I _o = 700 mA	-	-	59 V	
I _o = 1050 mA	-	-	42 V	
I _o = 1280 mA	-	-	37 V	
I _o = 1400 mA	-	-	34 V	
I _o = 1750 mA	-	-	27 V	
Total Output Current Ripple (pk-pk)	-	-	50%I _o	Related to V-I Curve of the LED
Output Current Overshoot / Undershoot	-	-	10%I _o	At 100% load condition
Line Regulation	-	-	±1%	Measured at 100% load condition
Load Regulation	-	-	±3%	Measured at 100% load condition
Turn-on Delay Time	-	0.40 s	0.75 s	Measured at 120Vac input, 75%load-100%load
	-	0.30 s	0.50 s	Measured at 220Vac input, 75%load-100%load
Temperature Coefficient of I _{omax}	-	-	0.2%/°C	Case temperature = 0°C ~T _c max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	20 mA	Return terminal is "Dim-".

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: $I_o = 350 \text{ mA}$ $I_o = 450 \text{ mA}$ $I_o = 530 \text{ mA}$ $I_o = 700 \text{ mA}$ $I_o = 1050 \text{ mA}$ $I_o = 1280 \text{ mA}$ $I_o = 1400 \text{ mA}$ $I_o = 1750 \text{ mA}$	87% 86% 86% 86% 85% 84% 84% 84%	89% 88% 88% 88% 86% 86% 85% 85%	- - - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient.
Efficiency at 220 Vac input: $I_o = 350 \text{ mA}$ $I_o = 450 \text{ mA}$ $I_o = 530 \text{ mA}$ $I_o = 700 \text{ mA}$ $I_o = 1050 \text{ mA}$ $I_o = 1280 \text{ mA}$ $I_o = 1400 \text{ mA}$ $I_o = 1750 \text{ mA}$	88% 87% 87% 87% 86% 85% 85% 85%	90% 89% 89% 89% 88% 87% 87% 87%	- - - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient.
Efficiency at 277 Vac input: $I_o = 350 \text{ mA}$ $I_o = 450 \text{ mA}$ $I_o = 530 \text{ mA}$ $I_o = 700 \text{ mA}$ $I_o = 1050 \text{ mA}$ $I_o = 1280 \text{ mA}$ $I_o = 1400 \text{ mA}$ $I_o = 1750 \text{ mA}$	88% 87% 87% 87% 86% 85% 85% 85%	90% 89% 89% 89% 88% 87% 87% 87%	- - - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient.
No Load Power Dissipation	-	-	6 W	
MTBF	327,000 Hours	-	-	Measured at 120Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Life Time	-	116,000 Hours	-	Measured at 120Vac input, 80%Load and 60°C Case temperature. See life time vs. T_c curve for the details
Operating Case Temperature for Safety T_{c_s}	-40 °C	-	+90 °C	
Operating Case Temperature for Warranty T_{c_w}	-40 °C	-	+70 °C	Humidity: 10% RH to 95% RH
Operating Case Temperature for Type TL T_{c_TL}	-40 °C		+72 °C	
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 95% RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	3.74 × 2.76 × 1.26 95 × 70 × 32			
Net Weight	-	390 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the 0~10V Input Pin	0 V	-	15 V	
Source Current on 0~10V Input Pin	0 μ A	200 μ A	250 μ A	
Dimming Output Range	10%Iomax		100%Iomax	
Recommended Dimming Input Range	0 V	-	10 V	

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
ENEC & TUV & CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KS	KS C 7655
EMI Standards	Notes
EN 55015/GB 17743 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage Fluctuations & Flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 2 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS

Safety & EMC Compliance (Continued)


EMS Standards	Notes
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

Lifetime vs. Case Temperature Curve

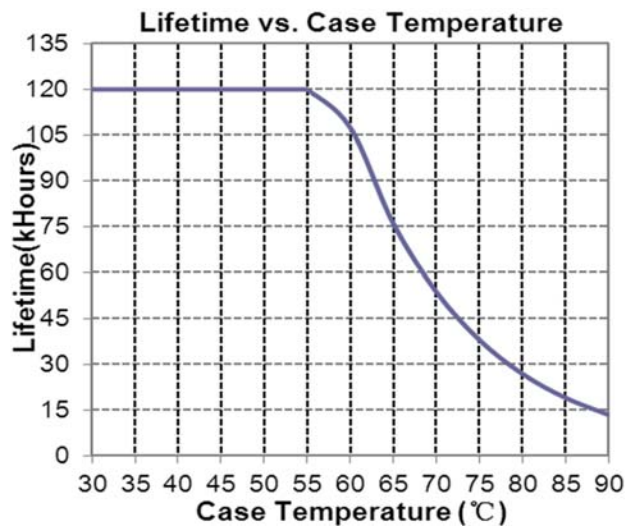


Inrush Current Waveform

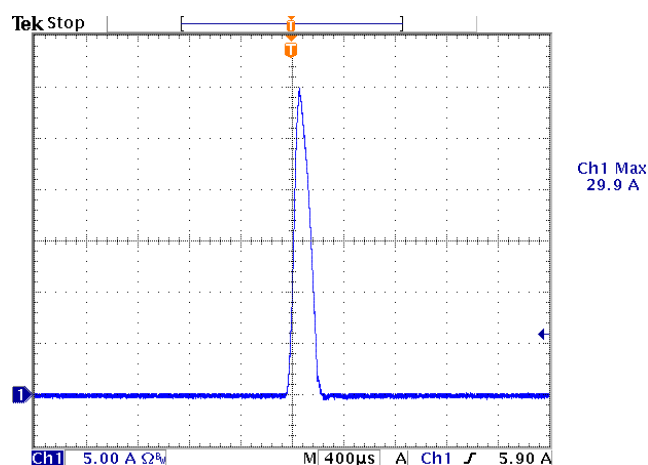

Efficiency vs. Load


EUC-042S035DS(PS)

Efficiency vs. Output Voltage

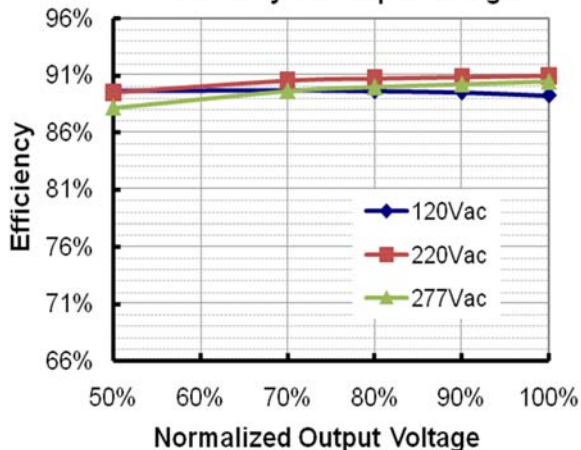


EUC-042S045DS(PS)

Efficiency vs. Output Voltage

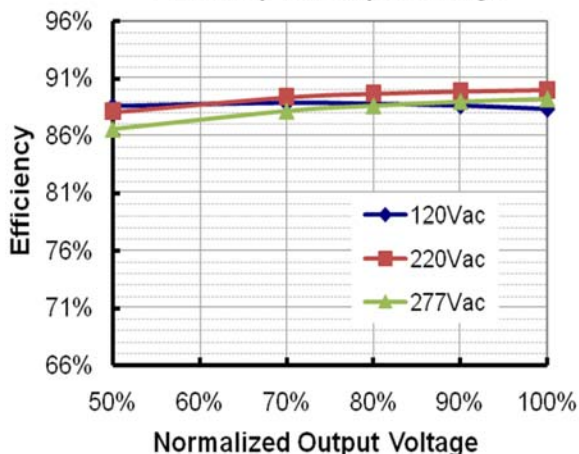


EUC-042S053DS(PS)

Efficiency vs. Output Voltage

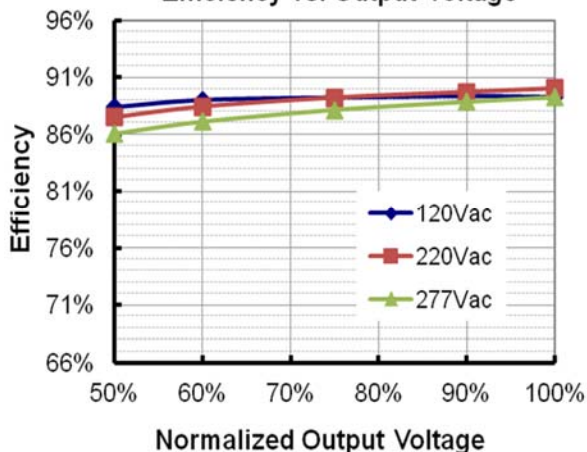


EUC-042S070DS(PS)

Efficiency vs. Output Voltage

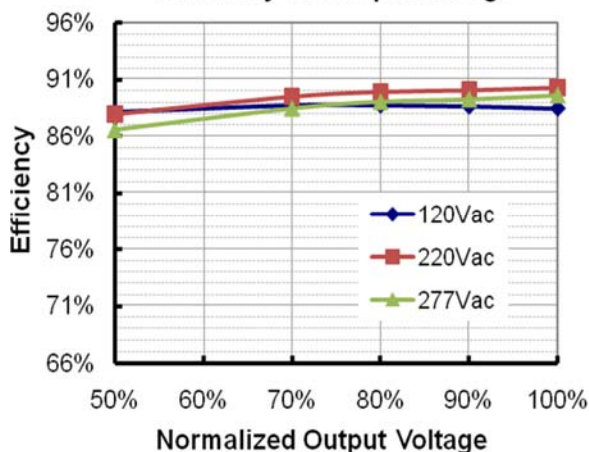


EUC-042S105DS(PS)

Efficiency vs. Output Voltage

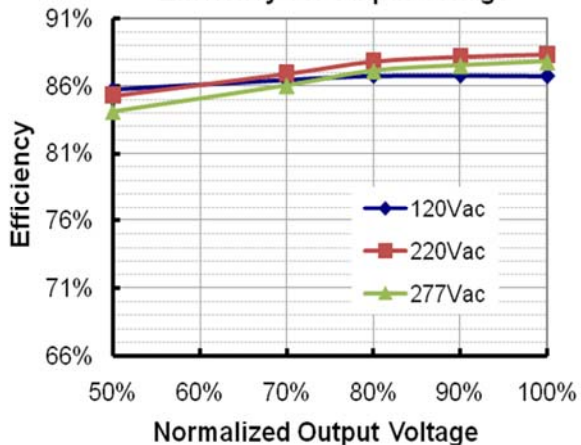


EUC-042S128DS(PS)

Efficiency vs. Output Voltage

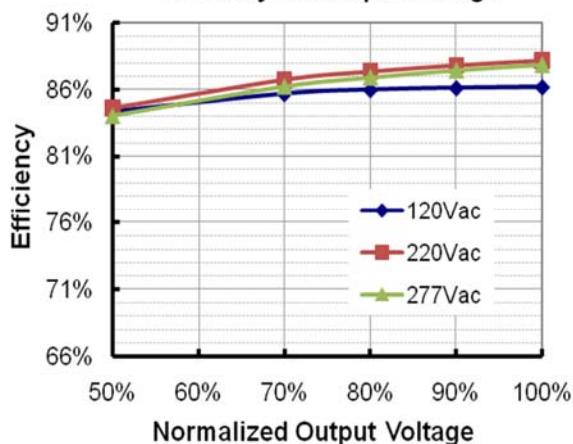


EUC-042S140DS(PS)

Efficiency vs. Output Voltage

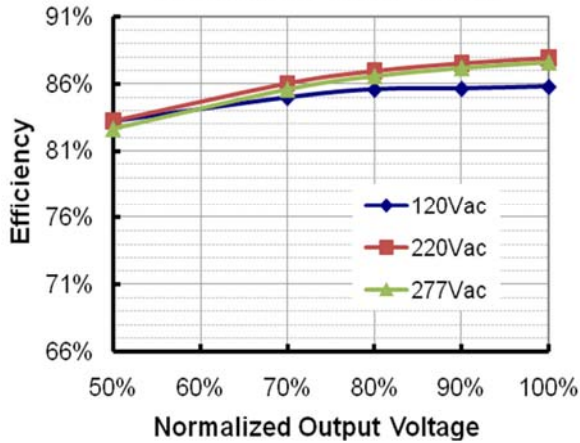


EUC-042S175DS(PS)

Efficiency vs. Output Voltage

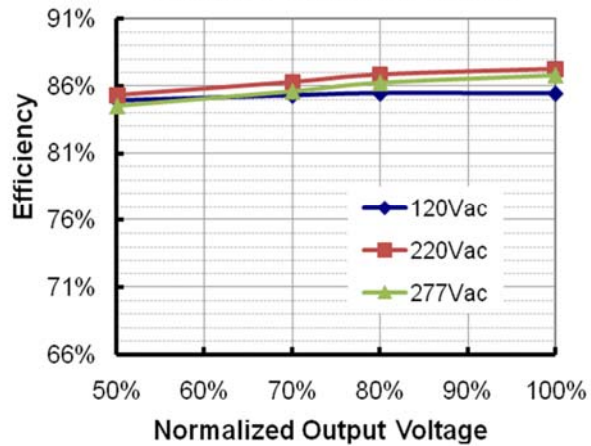


Power Factor Characteristics

PF vs. Load

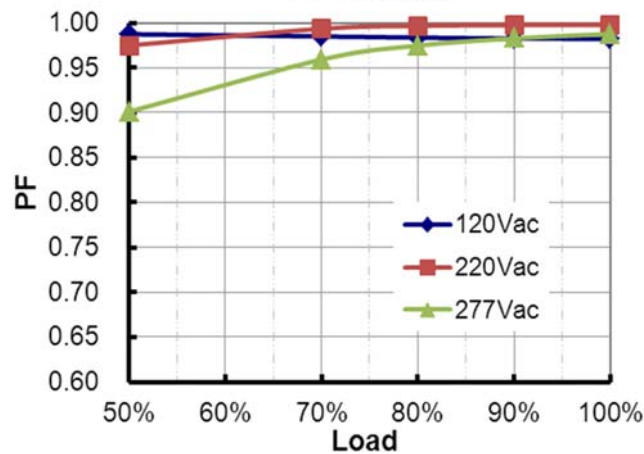

Total Harmonic Distortion

THD vs. Load

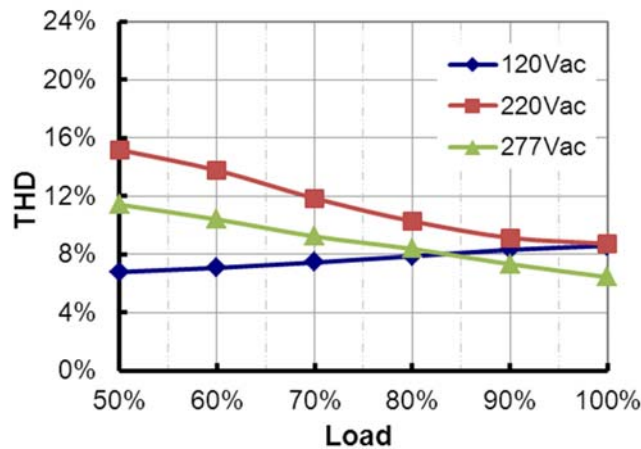



Protection Functions

Parameter	Notes
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.
Short Circuit Protection	Auto Recovery. No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection	Auto Recovery. Returning to normal after over temperature is removed.



Dimming Control

● 0-10V Dimming



The dimmer control may be operated from either a dimmer or from an input signal of 0 - 10 Vdc. The recommended implementation is provided below.

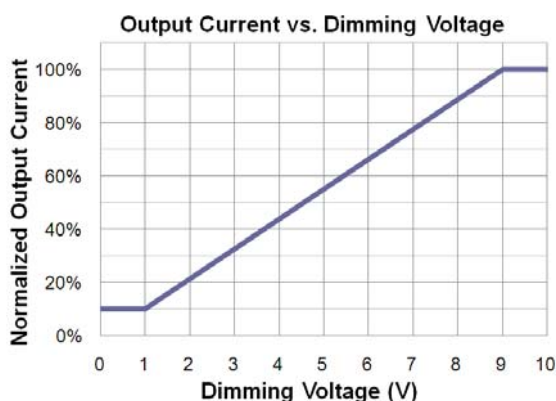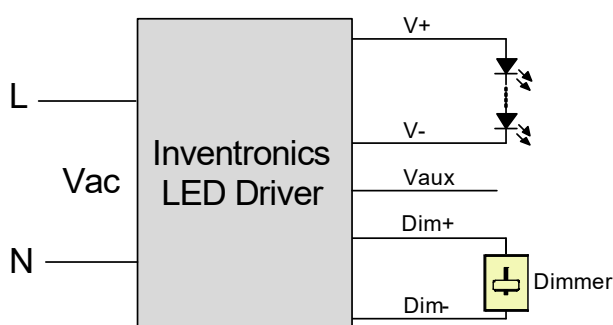

Implementation 1: DC Input

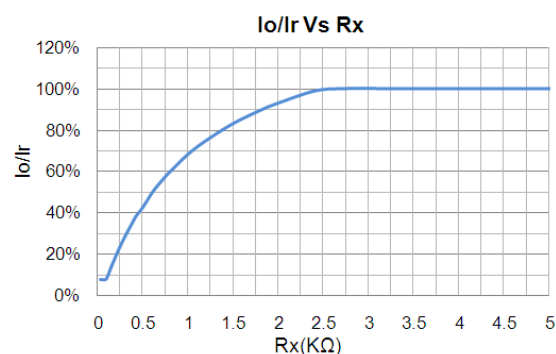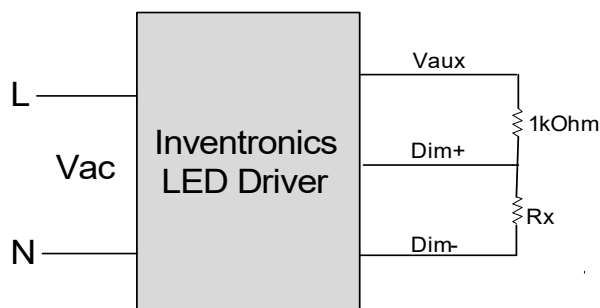

Implementation 2: External Resistor

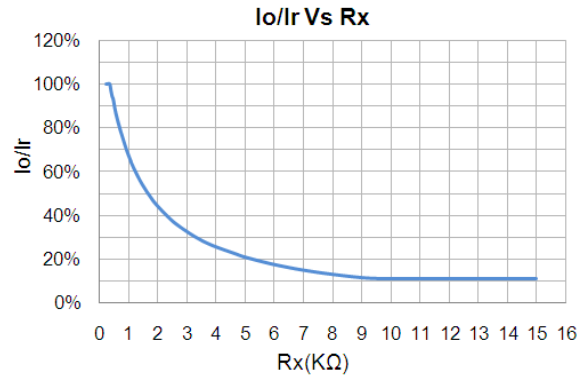
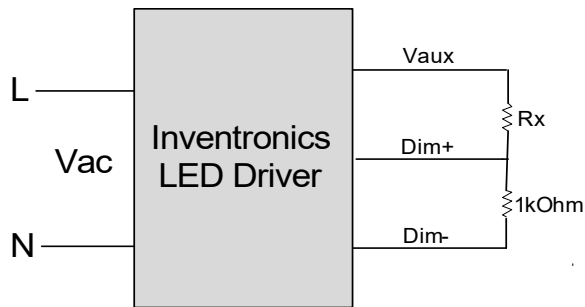


Implementation 3: External Resistor

Notes:

1. Do not connect the Dim- to the V-, otherwise, the LED driver cannot work normally.
2. If 0-10V dimming is not used, Dim + can be either open or connected to Vaux.

Mechanical Outline

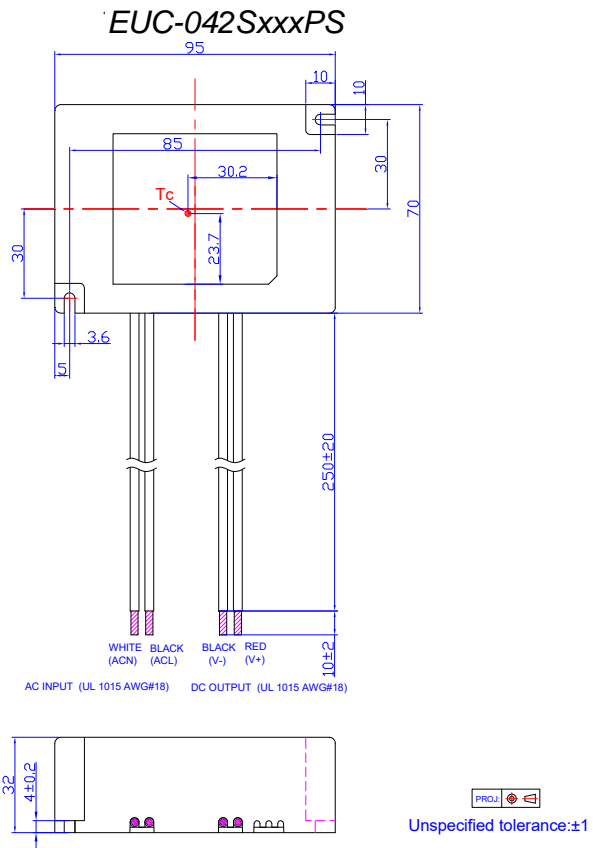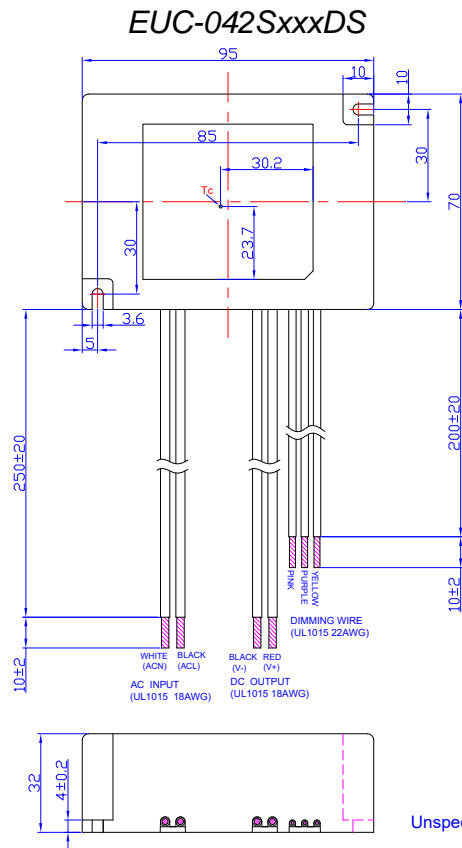

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2012-02-17	A	Preliminary Datasheets First Release	/	/
2012-03-21	B	EUC-042S105DS(PS) CUL Class 2 added	/	/
2012-05-25	C	EUC-042S105DS(PS)-0001	/	Added
		EN 61000-4-5--- line to line 2 kV, line to earth 4 kV	/	Corrected
		Life time	/	50,000 Hours
		EUC-042S070DS(PS)-0001	/	Added
2012-06-06	D	EUC-042S070DS(PS)-0001, EUC-042S105DS(PS)-0001	/	Deleted
		Notes of life time	/	Updated
		Life time vs. Tc Curve	/	Added
2012-07-02	E	Description of OTP	/	Updated
2012-07-17	F	Max Case Temperature	/	Updated
2012-7-30	G	Min Operating Temperature	-20℃	-40℃
2012-08-20	H	Derating Curve	/	Updated
		Inrush Current	60A	70A
		Inrush Current(I ² t)	/	Added
		Temperature coefficient	/	Added
2012-11-16	I	Life time	Min 50,000hrs	Typical 116,000hrs
		Life time Curve	/	Updated
		Io/Ir Vs Rx Curve	/	Added
		THD Curve	/	Added
		EFF and PF Curve of other models	/	Added
2013-05-22	J	Inrush Current(I ² t) corrected	0.16 A ² s	0.32 A ² s
		Duration of Inrush Current corrected	100 μs	200 μs
		Mechanical Outline---cable length corrected	/	Updated
2013-11-25	K	Model 530mA	/	Added
		Mechanical Outline-Dimming wires updated	UL1015 26AWG	UL1015 22AWG
2014-05-27	L	ENEC certificate	/	Added
2015-08-04	M	Warranty Tc	/	Added
		Environmental Specifications	/	Deleted
		Inrush Current Waveform	/	Added

Revision History (Continued)

Change Date	Rev.	Description of Change		
		Item	From	To
2015-08-04	M	CCC certificate	/	Added
		CQC certificate	./	Deleted
		Source Current on 0~10V Input Pin Max.	200 uA	250 uA
2015-12-31	N	KS Certification	/	Added
		KC Certification-EUC-042S070/105/128/140DS(PS)	/	Added
		Net Weight	350 g	390 g
2016-04-18	O	UL Type TL	/	Added
		KS Certificate Regulation	/	Added
		Note of EMI Standard	/	Added
2016-08-02	P	Turn-on Delay Time at 120Vac	Max.=1.0 s	Max.=0.75 s
2019-04-17	Q	Mechanical Outline	/	Updated
2019-08-21	R	TUV Logo	/	Updated
		ENEC Logo	/	Updated
		PSE Logo	/	Updated
		KC Logo	/	Deleted
		Note of Models	(6)	Deleted
		Input Specifications(PF/THD)	50-60Hz	Added
		Output Specifications (No Load Output Voltage)-EUC-042S035DS(PS)	132V	140V
		Safety &EMC Compliance	UL/CUL	Updated
		Safety &EMC Compliance	ENEC	Added
		Safety &EMC Compliance	TUV	Added
		Safety &EMC Compliance	CB	Added
		Safety &EMC Compliance	PSE	Added
		Safety &EMC Compliance	KS	Updated
		Safety &EMC Compliance	EMI Standards	Updated
		Safety &EMC Compliance	FCC	Updated
		Safety &EMC Compliance	EN 61000-4-5	Updated
		RoHS Compliance	/	Updated

Revision History (Continued)

Change Date	Rev.	Description of Change		
		Item	From	To
2021-12-31	S	PSE Logo	/	Deleted
		Safety &EMC Compliance	PSE	Deleted
		General Specifications	Humidity	Updated
		Mechanical Outline	EUC-042SxxxDS	Updated