

Features

- High Efficiency (Up to 91%)
- Full Power at 50-100% Max Current (Constant Power)
- DALI Dimmable and Dim-to-Off
- Standby Power ≤ 1 W
- Input Surge Protection: DM 4kV, CM 6kV
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output



Description

The EUD-096SxxxBV series is a 96W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. Created for many lighting applications including low bay, tunnel and street, etc. it provides a dim-to-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Output Current Range	Full-Power Current Range (1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Power Factor		Model Number
							120Vac	220Vac	
45-900mA	450-900mA	700 mA	90~305 Vac/ 127~250 Vdc	64~214Vdc	96 W	91.0%	0.99	0.96	EUD-096S090BV
90-1800mA	900-1800mA	1050 mA	90~305 Vac/ 127~250 Vdc	32~107Vdc	96 W	90.5%	0.99	0.96	EUD-096S180BV ⁽⁴⁾
180-3600mA	1800-3600mA	2100 mA	90~305 Vac/ 127~250 Vdc	16 ~ 53Vdc	96 W	90.0%	0.99	0.96	EUD-096S360BV ⁽⁴⁾


Notes: (1) Output current range with constant power at 96W

(2) Certified input voltage range: 100-240Vac or 127-250Vdc

(3) Measured at a 220 Vac input with 50% maximum output current and 100% maximum output voltage.

(4) SELV Output

I-V Operating Area

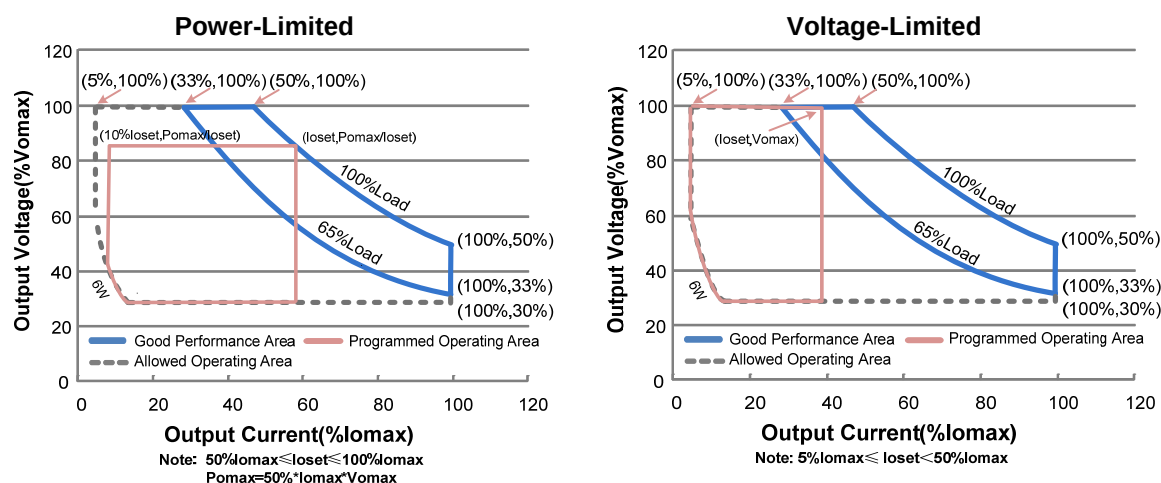

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	127~250 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	1.3 A	Measured at 100% load and 100 Vac input.
	-	-	0.6 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	2.4 A ² s	At 220Vac input, 25°C Cold Start, Duration=1.0 ms, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 50-60Hz, 65%-100% Load
THD	-	-	20%	(63-96W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Ioset	-	5%Ioset	At 100% load condition
Output Current Setting(Ioset) Range	5%Iomax	-	100%Iomax	
Output Current Setting Range with Constant Power	50%Iomax	-	100%Iomax	
Total Output Current Ripple (pk-pk)	-	5%Iomax	10%Iomax	At 100% load condition, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	1%Iomax	-	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%Iomax	At 100% load condition

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
No-load Output Voltage EUD-096S090BV EUD-096S180BV EUD-096S360BV	- - -	- - -	240 V 119 V 59.5 V	
Line Regulation	-	-	±0.5%	Measured at 100% load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac and 220Vac input. 65%-100% Load
Temperature Coefficient of I _o set	-	0.03%/°C	-	Case temperature = 0°C ~T _c max

Note: All specifications are typical at 25°C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUD-096S090BV I _o =450 mA I _o =900 mA EUD-096S180BV I _o =900 mA I _o =1800mA EUD-096S360BV I _o =1800mA I _o =3600mA	 85.5% 84.5% 85.0% 84.0% 84.5% 83.0%	 88.5% 87.5% 88.0% 87.0% 87.5% 86.0%	 - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 220 Vac input: EUD-096S090BV I _o =450 mA I _o =900 mA EUD-096S180BV I _o =900 mA I _o =1800mA EUD-096S360BV I _o =1800mA I _o =3600mA	 89.0% 88.0% 88.5% 87.5% 88.0% 86.5%	 91.0% 90.0% 90.5% 89.5% 90.0% 88.5%	 - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: EUD-096S090BV I _o =450 mA I _o =900 mA EUD-096S180BV I _o =900 mA I _o =1800mA EUD-096S360BV I _o =1800mA I _o =3600mA	 89.5% 88.5% 89.0% 88.0% 88.5% 87.0%	 91.5% 90.5% 91.0% 90.0% 90.5% 89.0%	 - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Standby power	-	-	1 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	212,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK- 217F)
Lifetime	-	111,000 Hours	-	Measured at 220Vac input, 80%Load and 60°C case temperature; See lifetime vs. T _c curve for the details

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+70°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	7.64 × 2.66 × 1.44 194 × 67.5 × 36.5			With mounting ear 8.70 × 2.66 × 1.44 221 × 67.5 × 36.5
Net Weight	-	985 g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
DA1,DA2 High Level	9.5V	16V	22.5V	
DA1,DA2 Low Level	-6.5V	0V	6.5V	
DA1,DA2 Current	0mA	-	2mA	
Dimming Output Range	10%I _o set	-	I _o set	50%I _o max ≤ I _o set ≤ 100%I _o max
	5%I _o max	-	I _o set	5%I _o max ≤ I _o set < 50%I _o max

Note: All specifications are typical at 25 °C unless stated otherwise.

Standards Compliance


Safety Category	Standard
ENEC & TUV & CE	EN 61347-1, EN61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage Fluctuations & Flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge(ESD): 8kV air discharge, 4kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances test-CS

Standards Compliance (Continued)


EMS Standards	Notes
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment
DALI Standards	Notes
DALI	IEC62386-101,102 & part of 207 ⁽²⁾

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.
 (2) Optional Commands Implemented: 242 (query short circuit), 243 (query open circuit)

Lifetime vs. Case Temperature

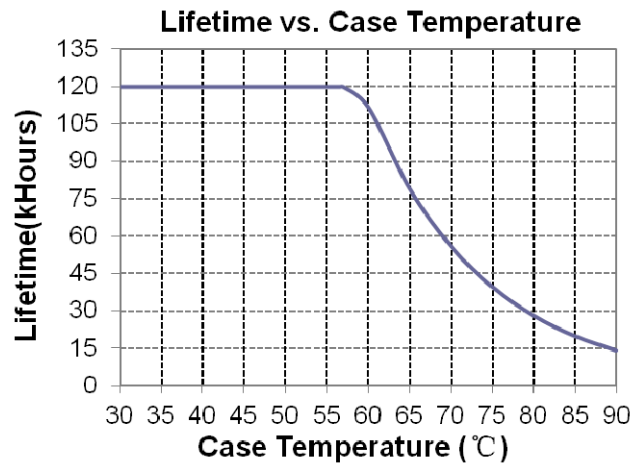


Inrush Current Waveform

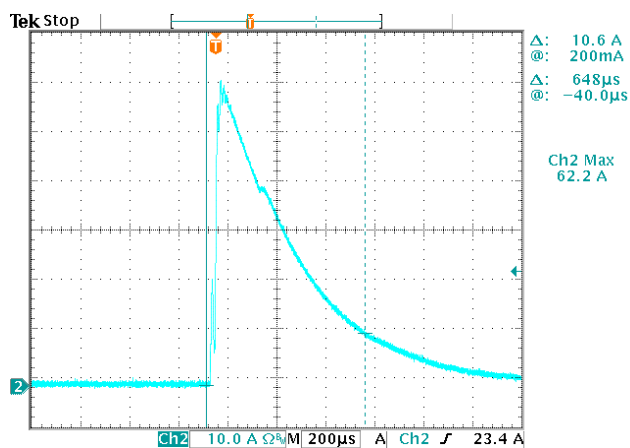

Efficiency vs. Load


EUD-096S090BV(I_o=450mA)

Efficiency vs. Output Voltage

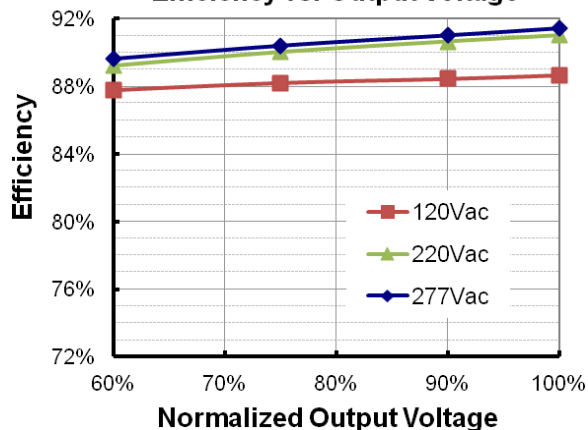


EUD-096S090BV(I_o=900mA)

Efficiency vs. Output Voltage

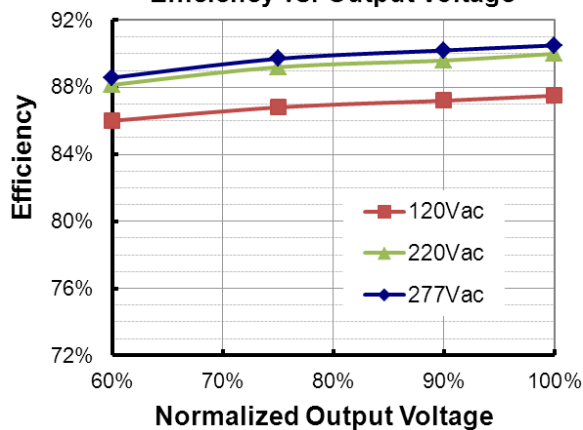


EUD-096S180BV(I_o=900mA)

Efficiency vs. Output Voltage

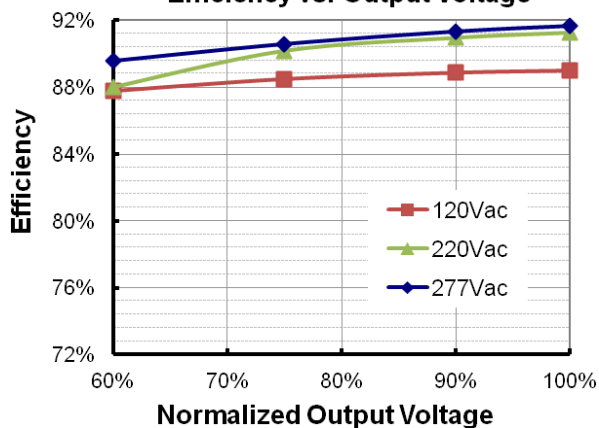


EUD-096S180BV(I_o=1800mA)

Efficiency vs. Output Voltage

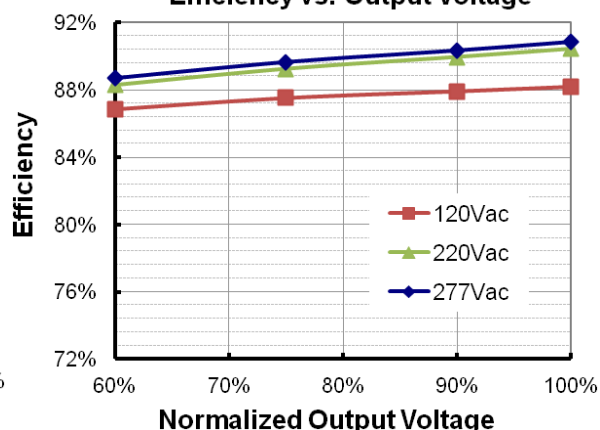


EUD-096S360BV(I_o=1800mA)

Efficiency vs. Output Voltage

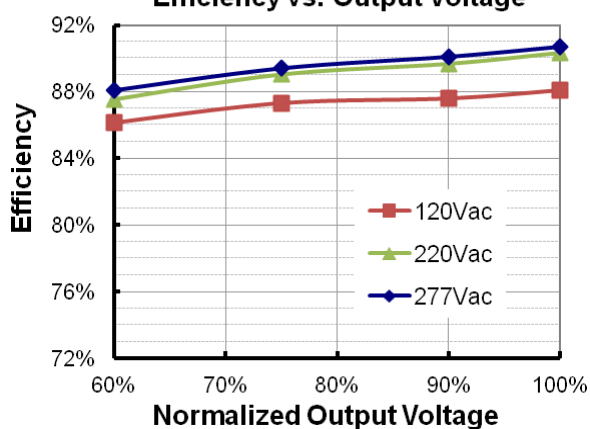


EUD-096S360BV(I_o=3600mA)


Efficiency vs. Output Voltage

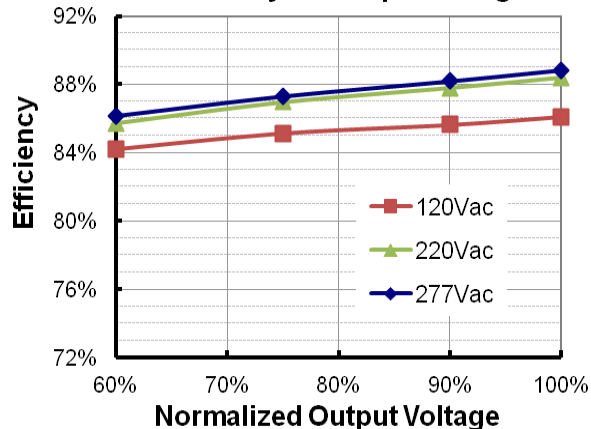

Power Factor

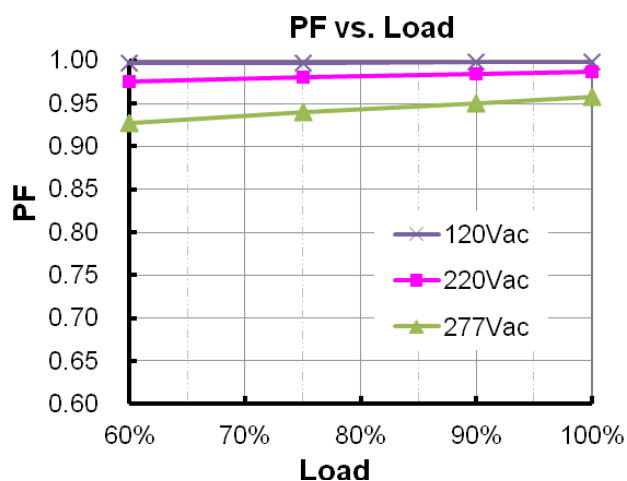

Total Harmonic Distortion

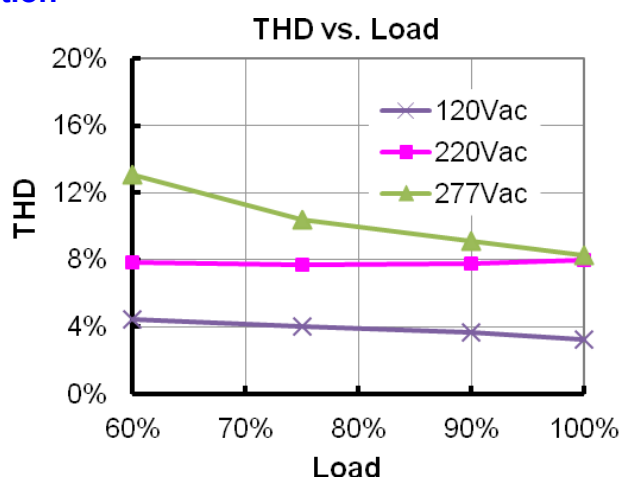




Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.

Dimming


● DALI Dimming

The recommended implementation of the dimming control is provided below.

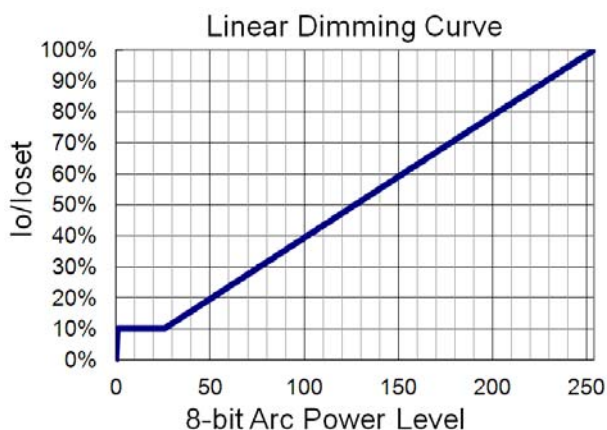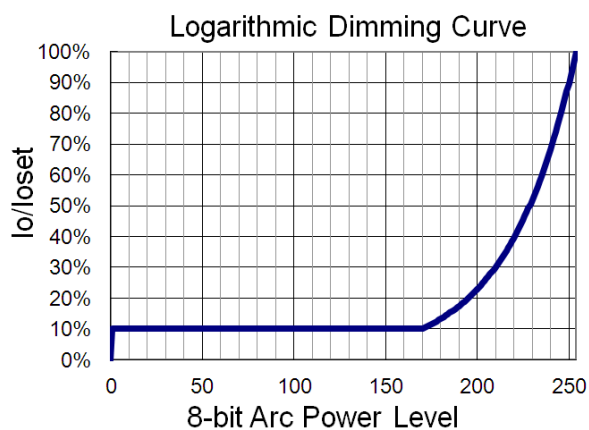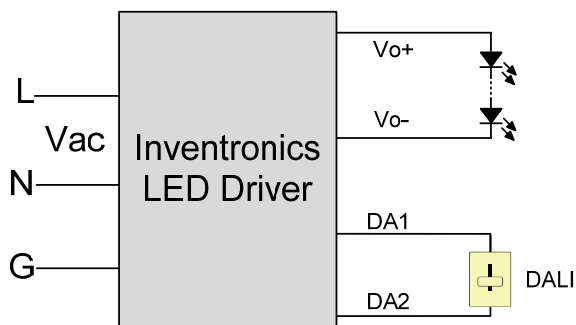

Implementation: DALI Dimming


Programming Connection Diagram

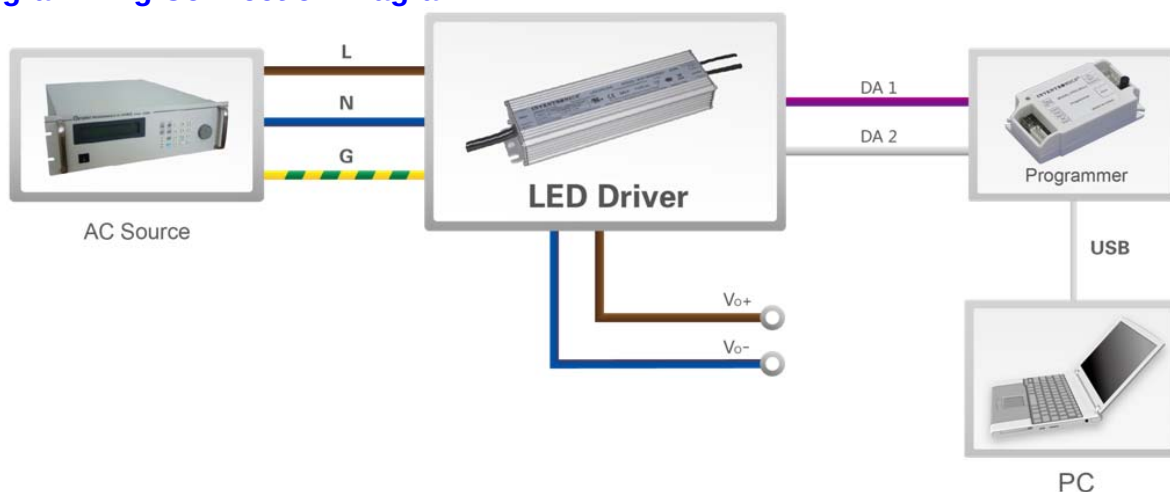

Note: The driver needs to be powered on during the programming process.

- Please refer to [PRG-MUL2](#) Multi-Programmer datasheet for details.

Mechanical Outline

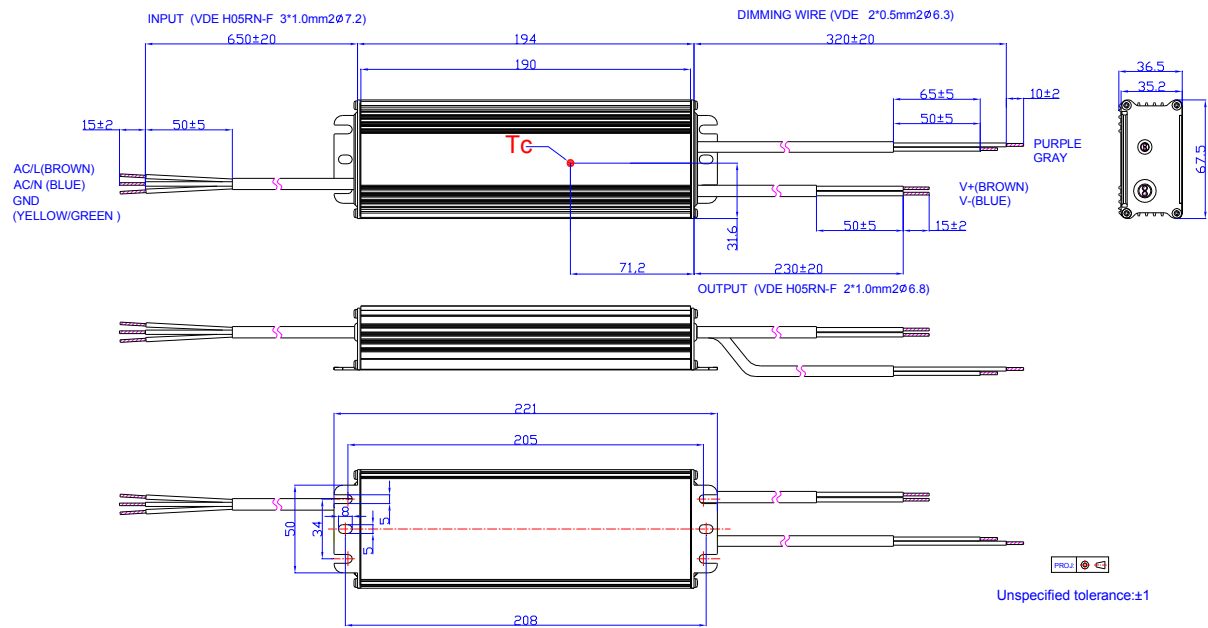

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2014-08-30	A	Datasheets Release	/	/
2015-03-30	B	CCC	/	Added
		Features	/	Input Surge Protection: 4kV line-line, 6kV line-earth
		Input Specifications	Leakage Current	Updated
		Output Specifications	Output Current Ripple(pk-pk)	Total Output Current Ripple (pk-pk)
		Output Current Ripple at < 200 Hz (pk-pk)	/	Added
		General Specifications	Case Temperature	Operating Case Temperature for Safety Tc_s
		General Specifications	/	Operating Case Temperature for Warranty Tc_w
		General Specifications	/	Storage Temperature
		Environmental Specifications	/	Delete
		Derating	/	Delete
		Mechanical Outline	/	Updated
2015-09-16	C	KS, DALI Logo	/	Added
		Features	/	Updated
		Safety & EMC Compliance	Safety & EMC Compliance	Standards Compliance
		Standards Compliance	DALI Standards	Added
2016-04-13	D	Input Specifications	Leakage Current	Updated
		General Specifications	With mounting ear	Added
		General Specifications	Net Weight	Update
		Standards Compliance	/	Updated
2019-08-23	E	TUV Logo	/	Updated
		ENEC Logo	/	Updated
		CCC Logo	/	Deleted
		Features	Input surge protection	Updated
		Features	Suitable for Independent Use	Independent Logo
		Description	/	Updated
		Input Specifications(PF/THD)	50-60Hz	Added
		Output Specifications (Turn-on Delay Time)	65%-100% Load	Added

Revision History (Continued)

Change Date	Rev.	Description of Change		
		Item	From	To
2019-08-23	E	Safety &EMC Compliance	ENEC	Added
		Safety &EMC Compliance	TUV	Added
		Safety &EMC Compliance	CB	Added
		Safety &EMC Compliance	KS	Updated
		Safety &EMC Compliance	EN 61000-4-5	Updated
		Mechanical Outline	/	Updated
		RoHS Compliance	/	Updated