

Features

- High Efficiency (Up to 89%)
- Active Power Factor Correction (Typical 0.95)
- Constant Output Voltage
- Lightning Protection
- Waterproof (IP66) and Damp Location
- All-Around Protection: OVP, SCP, OCP, OTP
- Class 2 and SELV



Description

The EUV-042SxxxPS Series operates from a 90 ~ 305 Vac input range. They are designed to be highly efficient and highly reliable. Features include over voltage protection, short circuit protection, over current protection, and over temperature protection.

Models

Output Voltage	Input Voltage Range(1)	Output Current Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number
					120Vac	220Vac	
12 Vdc	90 ~ 305 Vac	0~3500mA	42 W	84%	0.96	0.95	EUV-042S012PS ⁽³⁾
24 Vdc	90 ~ 305 Vac	0~1750mA	42 W	86%	0.96	0.95	EUV-042S024PS ⁽³⁾
36 Vdc	90 ~ 305 Vac	0~1160mA	42 W	87%	0.96	0.95	EUV-042S036PS ⁽³⁾
48 Vdc	90 ~ 305 Vac	0~875 mA	42 W	89%	0.96	0.95	EUV-042S048PS ⁽⁴⁾

Notes: (1) UL, FCC certified input voltage range: 100~277Vac, other certified input voltage range except UL & FCC: 100~240Vac.

(2) Measured at 100% load and 220 Vac input.

(3) Class 2 output (USR & CNR).

(4) Class 2 output (USR), Non-Class 2 output (CNR).

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 mA	At 277Vac/60Hz input
	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	0.6 A	Measured at 100% load and 100 Vac input.
	-	-	0.3 A	Measured at 100% load and 220 Vac input.
Inrush Current	-	-	70 A	At 220Vac input 25°C Cold Start. Duration=100 μs, 10%Ipk-10%Ipk.
Inrush Current(I ² t)	-	-	0.16 A ² s	
Power Factor	0.90	-	-	At 100-277Vac, 50-60Hz, 75% -100%load (31.5~42W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Tolerance	-5%Vo		5%Vo	
Output Voltage Ripple				Load conditions, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor.
Vo = 12 V	-	-	3 V	
Vo = 24 V	-	-	4 V	
Vo = 36 V	-	-	4 V	
Vo = 48 V	-	-	4 V	
No Load Output Voltage				
Vo = 12 V	-	-	16 V	
Vo = 24 V	-	-	28 V	
Vo = 36 V	-	-	40 V	
Vo = 48 V	-	-	52 V	
Startup Overshoot/Undershoot	-	-	10%Vo	At 100% load condition.
Line Regulation	-	-	$\pm$ 2%	Measured at 100% load
Load Regulation	-	-	$\pm$ 3%	
Turn-on Delay Time	-	0.40 s	0.75 s	Measured at 120Vac input.
	-	0.30 s	0.50 s	Measured at 220Vac input.
Temperature coefficient	-	-	0.2%/°C	Case temperature = 0°C ~Tc max

Note: All specifications are typical at 25 °C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input:				Measured at 100% load and steady-state temperature in 25°C ambient.
Vo = 12 V	81%	82%	-	
Vo = 24 V	83%	84%	-	
Vo = 36 V	84%	85%	-	
Vo = 48 V	86%	87%	-	
Efficiency at 220 Vac input:				Measured at 100% load and steady-state temperature in 25°C ambient.
Vo = 12 V	83%	84%	-	
Vo = 24 V	85%	86%	-	
Vo = 36 V	86%	87%	-	
Vo = 48 V	88%	89%	-	
No Load Power Dissipation	-	-	6 W	
MTBF	327,000 hours	-	-	Measured at 120Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	116,000 Hours	-	Measured at 120Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40 °C	-	+90 °C	
Operating Case Temperature for Warranty Tc_w	-40 °C	-	+70 °C	Humidity: 10% RH to 100% RH.
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH
Dimensions				
Inches (L x W x H)	3.74 x 2.76 x 1.26			
Millimeters (L x W x H)	95 x 70 x 32			
Net Weight	-	390 g	-	


Note: All specifications are typical at 25 °C unless otherwise stated.

Safety & EMC Compliance



Safety Category	Standard
UL/CUL	UL8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655
EMI Standards	Standard
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 2 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment



Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

Lifetime vs. Case Temperature Curve

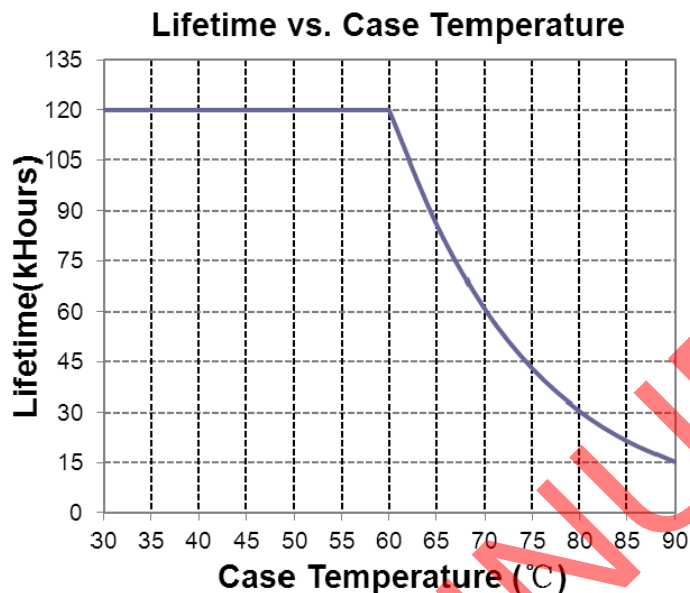


Efficiency vs. Load

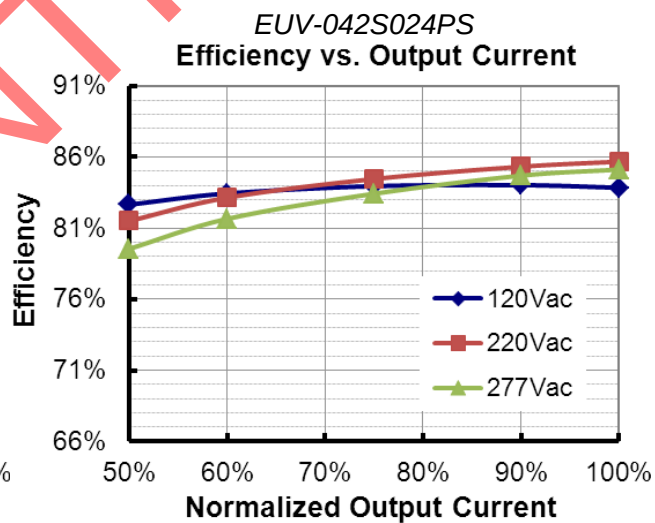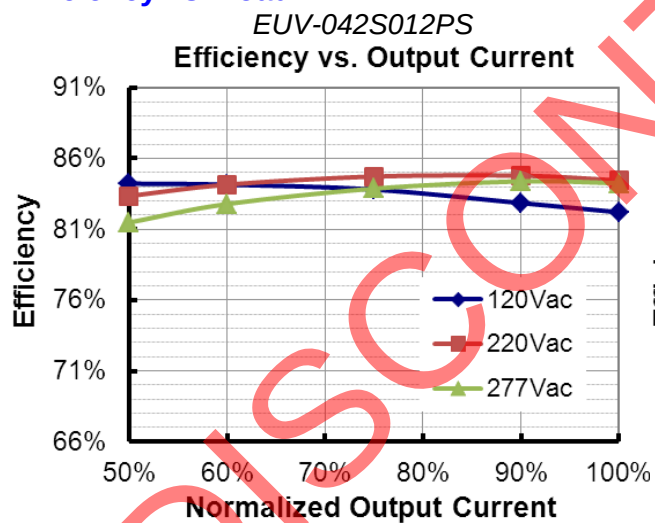

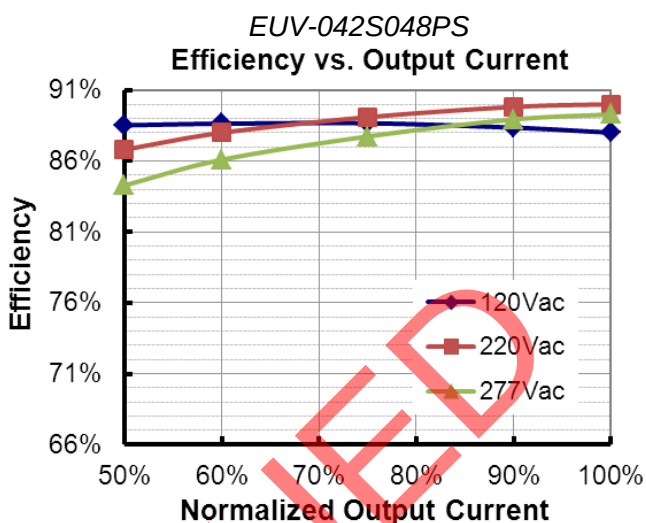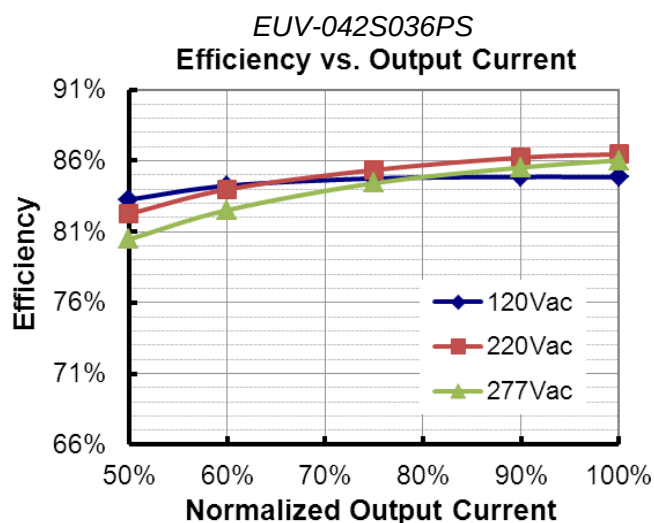


Power Factor

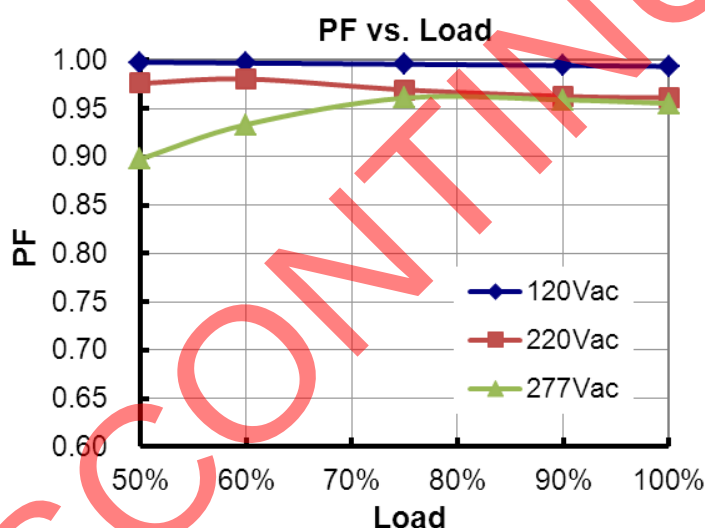

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Current Protection	1.1 I _o	1.4 I _o	1.7 I _o	Hiccup mode. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection-T _c	Hiccup mode. When the case temperature is higher than 110°C, the power supply will turn off automatically; when the case temperature is lower than 75°C, the power supply will be auto recovery.			
Short Circuit Protection	Auto Recovery. No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

Mechanical Outline

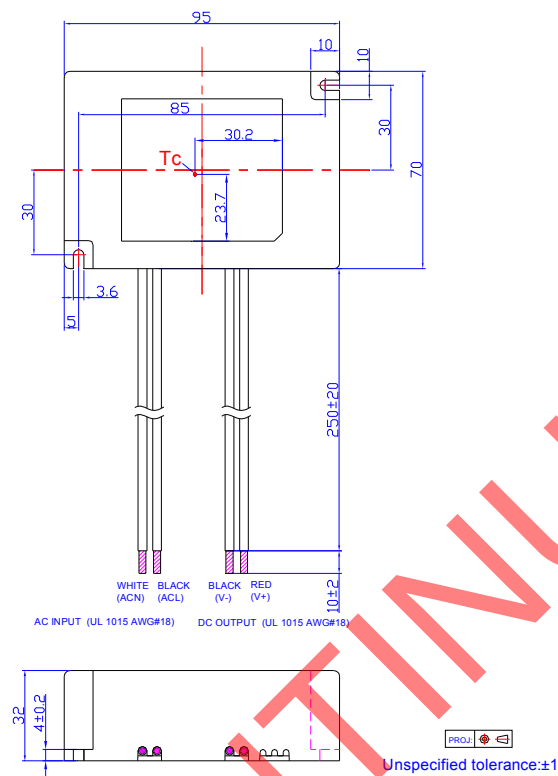

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2012-04-24	A	Datasheets Release	/	/
2012-05-25	B	OTP	/	Added
		EN 61000-4-5--- line to line 2 kV, line to earth 4 kV	/	Corrected
2012-06-06	C	Life time vs. Tc Curve	/	Added
		Notes of life time	/	Updated
2012-7-2	D	Description of OTP	/	Updated
2012-7-17	E	Max Case Temperature	/	Updated
2012-7-30	F	Min Operating Temperature	-20℃	-40℃
2012-8-16	G	Derating Curve	/	Updated
		Inrush Current(I2t)	/	Added
		Inrush Current	60A	70A
		Temperature co-efficient	/	Added
2012-11-26	H	Life time	Min 50,000hrs	Typical 116,000hrs
		Life time Curve	/	Updated
2013-07-01	I	Energy star	/	Deleted
2016-08-02	J	Turn-on Delay Time at 120Vac	Max.=1.0 s	Max.=0.75 s
		Operating Case Temperature for Warranty Tc_w	/	Added
		Net Weight	350 g	390 g
		Environmental Specifications	/	Deleted
		KS Certificate Regulation	/	Added
		Note of EMI Standard	/	Added
		Derating Curve	/	Deleted
2019-08-20	K	Input Specifications(PF/THD)	50-60Hz	Added
		Safety &EMC Compliance	UL/CUL	Updated
		Safety &EMC Compliance	KS	Updated
		Safety &EMC Compliance	FCC	Updated
		Safety &EMC Compliance	EN 61000-4-4	Updated
		Safety &EMC Compliance	EN 61000-4-5	Updated
		Mechanical Outline	/	Updated
		RoHS Compliance	/	Updated