

## Features

- High Efficiency (Up to 85%)
- Active Power Factor Correction (Typical 0.95)
- Cascade Connection
- Adjustable Constant Output Current with Dip Switch
- 0-10V Dimmable
- All-Around Protection: OVP, SCP and Open Lamp Protection
- Class 2 & SELV Output
- Class II, Double Insulation
- Reliable Device for Strain Relief



## Description

The LUC-024SxxxDSW(SSW) series operates from a 90 ~ 305 Vac input range. They are designed to be highly efficient and reliable. Features include over voltage, short circuit and open lamp protections.

## Models

Output Current	Input Voltage Range(1)	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number
					120Vac	220Vac	
350 mA	90 ~ 305 Vac 100~300 Vdc	44~72 Vdc	25 W	85%	0.96	0.95	LUC-024S035DSW(SSW)
530 mA	90 ~ 305 Vac 100~300 Vdc	29~48 Vdc	25 W	85%	0.96	0.95	LUC-024S053DSW(SSW) <sup>(3)</sup>
700 mA	90 ~ 305 Vac 100~300 Vdc	22~36 Vdc	25 W	84%	0.96	0.95	LUC-024S070DSW(SSW) <sup>(3)</sup>
1050 mA	90 ~ 305 Vac 100~300 Vdc	15~24 Vdc	25 W	83%	0.96	0.95	LUC-024S105DSW(SSW) <sup>(3)</sup>

**Notes:** (1) UL, FCC certified input voltage range: 100-277Vac or 100-300Vdc; other certified input voltage range except UL, FCC: 100-240Vac or 100-250Vdc.

(2) Measured at full load and 220 Vac input.

(3) Class 2 output (USR & CNR) for Dry and Damp Location.

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	100~300Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz
	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz
Input AC Current	-	-	0.35 A	Measured at full load and 100 Vac input
	-	-	0.175 A	Measured at full load and 220 Vac input

## Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Inrush Current	-	-	40 A	At 220Vac input, 25°C cold start, duration=220 μs, 10%Ipk-10%Ipk.
Inrush Current(I <sup>2</sup> t)	-	-	0.2 A <sup>2</sup> s	
Power Factor	0.90	-	-	At 100Vac-277Vac, 75%load-100%load
THD	-	-	20%	

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%I <sub>o</sub>	-	5%I <sub>o</sub>	
Output Voltage Ripple I <sub>o</sub> = 350 mA I <sub>o</sub> = 530 mA I <sub>o</sub> = 700 mA I <sub>o</sub> = 1050 mA	- - - -	- - - -	4.0 V 3.0 V 2.7 V 2.0 V	Load conditions, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor
No Load Voltage I <sub>o</sub> = 350 mA I <sub>o</sub> = 530 mA I <sub>o</sub> = 700 mA I <sub>o</sub> = 1050 mA	- - - -	- - - -	80 V 55 V 42 V 30 V	
Startup Overshoot Current	-	-	10%I <sub>o</sub>	Full load condition
Line Regulation	-	-	±1%	Full load condition
Load Regulation	-	-	±3%	
Turn-on Delay Time	-	0.4 s	0.75 s	Measured at 120Vac input, 75%-100%load
	-	0.3 s	0.6 s	Measured at 220Vac input, 75%-100%load
Temperature Coefficient	-	0.06%/°C	-	Case temperature = 0°C ~T <sub>c</sub> max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	20 mA	Return terminal is "Dim-"

**Note:** All specifications are tested by Cree XLamp XP-G and typical at 25°C unless otherwise stated.

## General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: I <sub>o</sub> = 350 mA I <sub>o</sub> = 530 mA I <sub>o</sub> = 700 mA I <sub>o</sub> = 1050 mA	82% 82% 81% 80%	84% 84% 83% 82%	- - - -	Measured at full load and steady-state temperature in 25°C ambient

## General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 220 Vac input: I <sub>o</sub> = 350 mA I <sub>o</sub> = 530 mA I <sub>o</sub> = 700 mA I <sub>o</sub> = 1050 mA	83% 83% 82% 81%	85% 85% 84% 83%	- - - -	Measured at full load and steady-state temperature in 25°C ambient
Efficiency at 277 Vac input: I <sub>o</sub> = 350 mA I <sub>o</sub> = 530 mA I <sub>o</sub> = 700 mA I <sub>o</sub> = 1050 mA	82% 82% 81% 80%	84% 84% 83% 82%	- - - -	Measured at full load and steady-state temperature in 25°C ambient
No Load Power Dissipation	-	-	2 W	
MTBF	-	307,000 Hours	-	Measured at 120Vac input, 80%load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	67,000 Hours	-	Measured at 120Vac input, 80%Load and 60°C case temperature; See life time vs. Tc curve for the details
Operating Case Temperature for Safety T <sub>c_s</sub>	-20 °C	-	+90 °C	
Operating Case Temperature for Warranty T <sub>c_w</sub>	-20 °C	-	+70 °C	Humidity: 10% RH to 90% RH. No condensation
Storage Temperature	-30 °C	-	+85 °C	Humidity: 5% RH to 90% RH. No condensation
Dimensions Inches (L × W × H) Millimeters (L × W × H)	6.30 × 1.58 × 1.18 160 × 40 × 30			
Net Weight	-	200 g	-	

**Note:** All specifications are tested by Cree XLamp XP-G and typical at 25°C unless otherwise stated.

## Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the 0-10V Input Pin	-20 V	-	20 V	
Source Current on 0-10V Input Pin	0 μA	200 μA	250 μA	
Dimming Output Range	10%I <sub>omax</sub>	-	100%I <sub>omax</sub>	
Recommended Dimming Input Range	0 V	-	10 V	

## Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL8750, UL1310, CAN/CSA-C22.2 No. 223-M91, CAN/CSA-C22.2 No. 250.13
CE	EN 61347-1, EN61347-2-13

## Safety & EMC Compliance (Continued)





Safety Category	Standard
PSE	J61347-1, J61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN 55015 <sup>(1)</sup>	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic Current Emissions
EN 61000-3-3	Voltage Fluctuations & Flicker
FCC Part 15 <sup>(1)</sup>	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test
EN 61000-4-4	Electrical Fast Transient / Burst-EFT Level 3, Criteria A
EN 61000-4-5	Surge Immunity Test: AC Power Line: Line to Line 1 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment

**Note:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


## Lifetime vs. Case Temperature

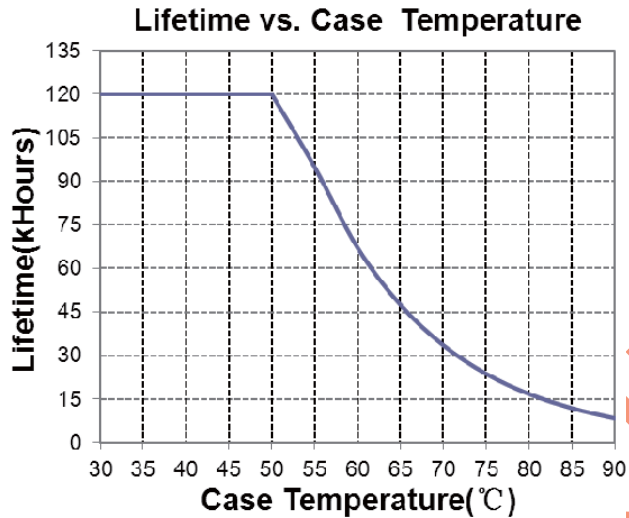

## Efficiency vs. Load

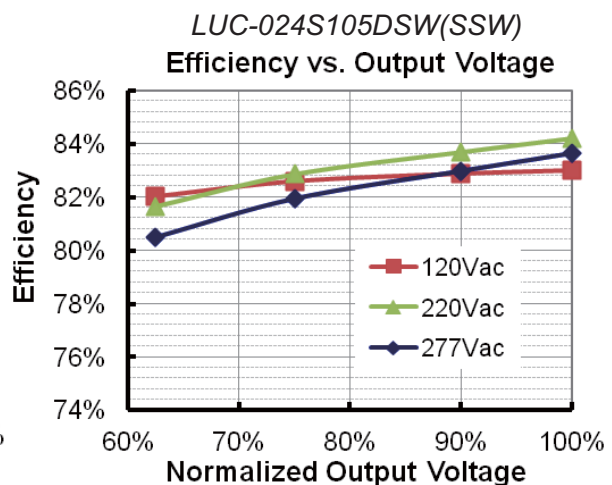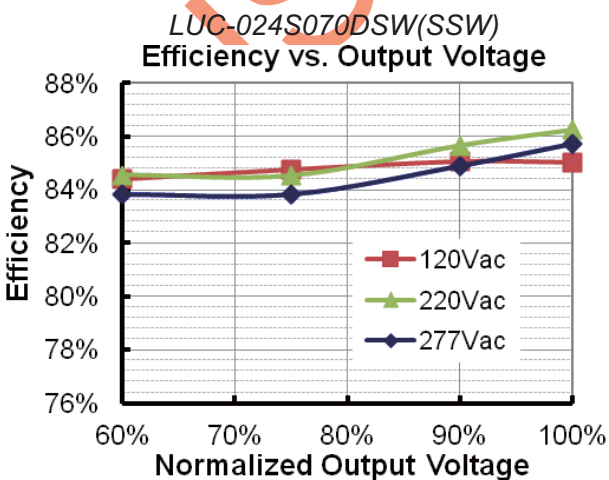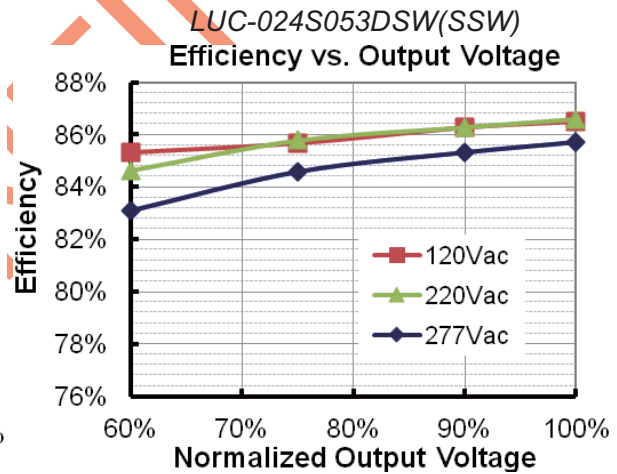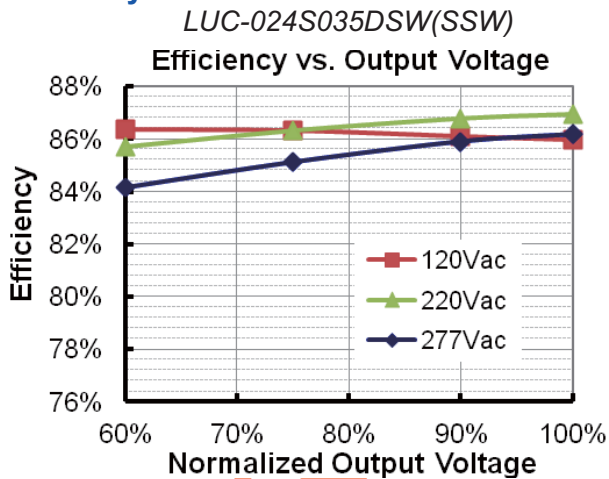


## Power Factor Characteristics

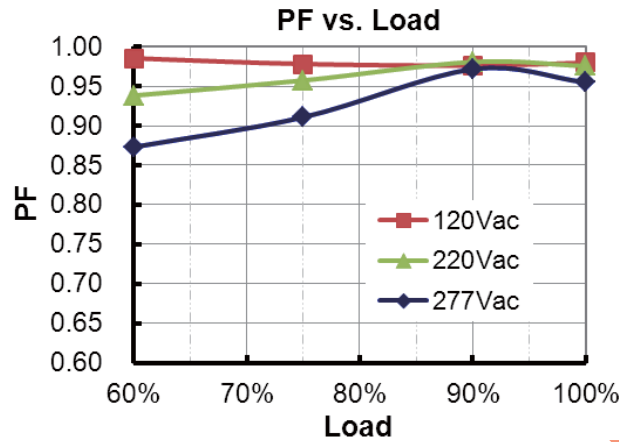


## Total Harmonic Distortion

LUC-024S105DSW(SSW)

### THD vs. Load

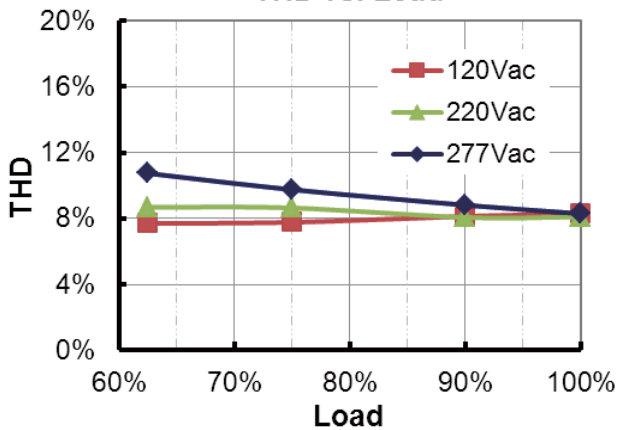

### Others THD vs. Load

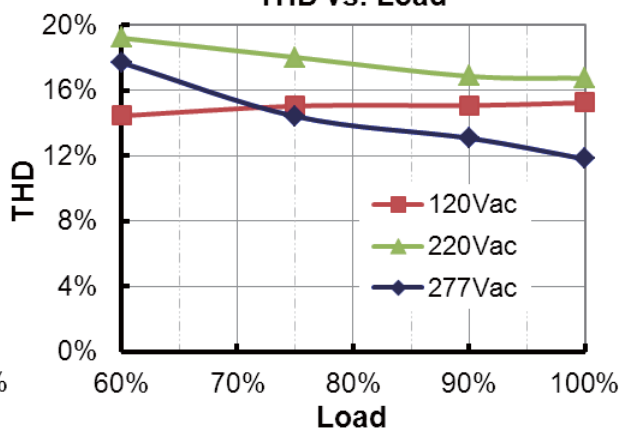

## Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Short Circuit Protection	Hiccup Mode. The power supply shall be self-recovery when the fault condition is removed.			

## Adjustable Constant Output Current with Dip Switch (LUC-024SxxxDSW/SSW)


Dip Switch			Output Current(Iset)
1	2	3	/
OFF	OFF	OFF	100%Iomax
ON	OFF	OFF	95%Iomax
OFF	ON	OFF	90%Iomax
ON	ON	OFF	85%Iomax
OFF	OFF	ON	80%Iomax

## Adjustable Constant Output Current with Dip Switch (LUC-024SxxxDSW/SSW) (Continued)


Dip Switch			Output Current(Iset)
ON	OFF	ON	75%Iomax
OFF	ON	ON	70%Iomax
ON	ON	ON	65%Iomax

### Dimming

The dimmer control may be operated from either a dimmer or from an input signal of 0 – 10 Vdc. The recommended implementation is provided below.

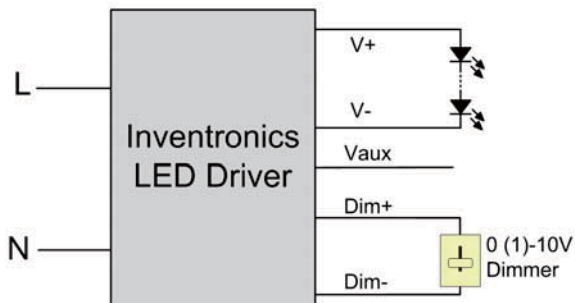

Io/Ir vs. Dimming Voltage

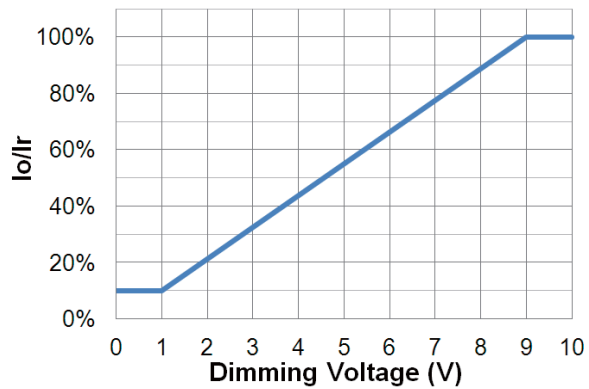


Implementation 1: 0-10V Dimming

#### Notes:

1.  $I_o$ : output current;  $I_r$ : rated output current.
2. Do not connect the Dim- to the V- or Vaux; otherwise, the LED driver cannot work normally.
3. If 0-10V dimming is not used, Dim + can be either open or connected to Vaux.




## Mechanical Outline

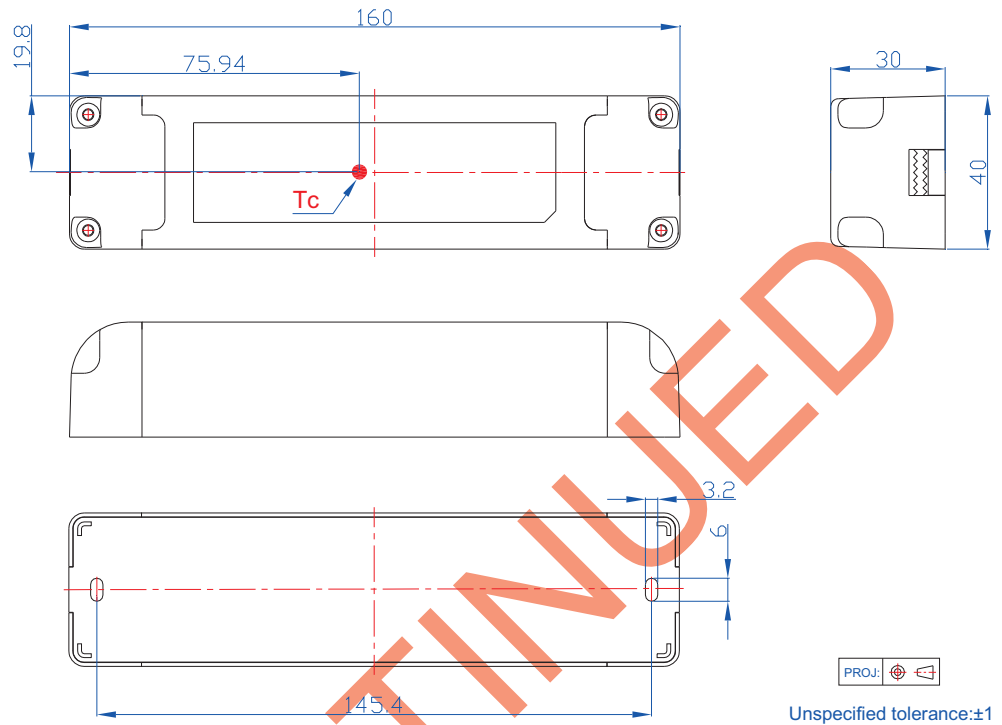

### Details of the recommended wires:


#### Input:

Strip wire 5-7mm  
Copper wire rated >300V  
18AWG/0.5-1.0mm<sup>2</sup>




#### Output:

Strip wire 4-6mm  
Copper wire rated >150V  
18-22AWG/0.5-0.75mm<sup>2</sup>



### Steps of wires fixed:

1. Insert the input /output wires into connecting terminals and lock it tightly;
2. Cover the cap and use screw to fasten the cap.

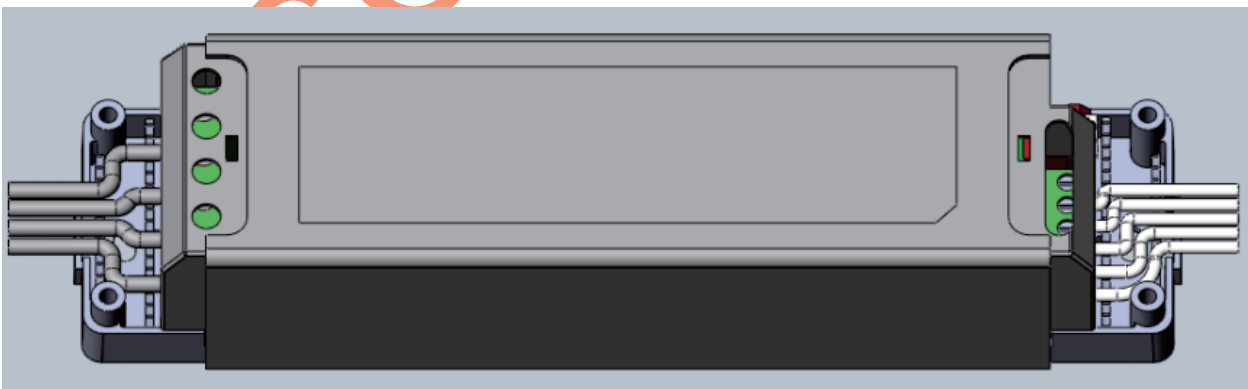

## RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.



## Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2013-10-09	A	Datasheet Release	/	/
2017-07-07	B	KS Certificate	/	Added
		Double Insulation	/	Added
		Input Voltage Range	127~250 Vdc	100~300 Vdc
		Turn-on Delay Time at 120Vac	Max.=1.0 s	Max.=0.75 s
		Operating Case Temperature for Warranty Tc_w	/	Added
		Net Weight	180 g	200 g
		Environmental Specifications	/	Deleted
		Dimming Specifications-0~10V Wire Current Sourcing Capability Max.	210 uA	250 uA
		Derating Curve	/	Deleted
		Power Factor Curve	/	Updated
		Total Harmonic Distortion Curve	/	Updated
		Resistor Dimming	/	Deleted