


Features

- Dim-to-Off with Standby Power $\leq 0.5W$
- Always-On Auxiliary Power: 12 Vdc, 200 mA
- Thermal Sensing and Protection for LED Module
- Full Power at 50% -100% Max. Current (Constant Power)
- Flicker-Free
- 0-10V/PWM/3 Timer-Modes Dimmable
- Output Lumen Compensation
- Suitable for Class I and Class II Luminaires
- Suitable for Built-in Use
- Class P, UL Listed Versions Available (See Note 5)
- 5 Years Warranty

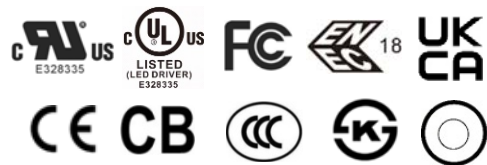

Description

The LUD-040SxxxDSF series is a 40W, constant-power, programmable IP20 LED driver that operates from 90-305 Vac input with excellent power factor. Created for dimmable panel lights and linear lights, it provides good dimming accuracy down to 5% output, plus a dim-to-off mode with low standby power. The high efficiency of these drivers and slim metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against open lamp protection, short circuit, and over temperature of both the driver and the external LED array.

Models

Output Current Range	Full-Power Current Range (1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range(3)	Max. Output Power	Typical Efficiency (4)	Typical Power Factor		Model Number(5)
							120Vac	220Vac	
17.5-750mA	350-750 mA	700 mA	90~305 Vac 127~300 Vdc	17~114Vdc	40 W	88%	0.99	0.96	LUD-040S075DSF ⁽⁶⁾
37.5-1500mA	750-1500 mA	1050 mA	90~305 Vac 127~300 Vdc	8~54 Vdc	40 W	88%	0.99	0.96	LUD-040S150DSF ⁽⁷⁾

Notes: (1) Output current range with constant power at 40W.

(2) Certified input voltage range: UL, FCC 100-277 Vac or 127-300 Vdc; otherwise: 100-240 Vac, or 127-250 Vdc (except CCC and KS).


(3) Minimum output voltage depends on the programmed output current, $V_{omin} = 12W / I_{oset}$.

(4) Measured at a 220Vac input with 50% maximum output current and 100% maximum output voltage.

(5) For UL Listed Class P models add suffix -00C0 (certified input voltage range: 120-277Vac or 127-250Vdc).

(6) SELV output.

(7) Class 2 & SELV output.

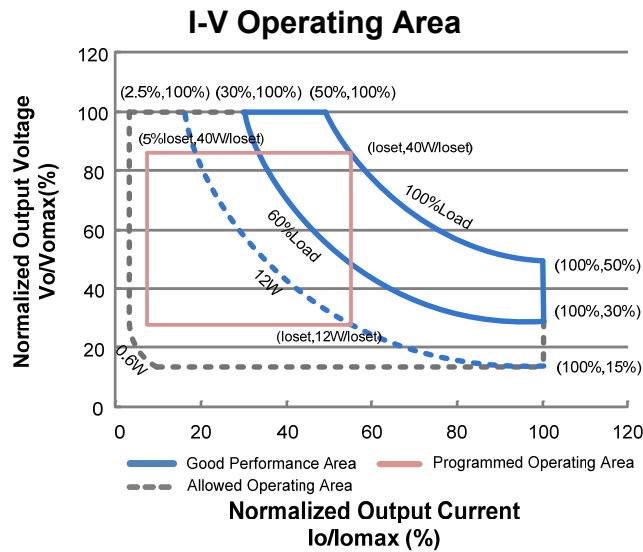

Note: Operating range depends on the programmed output current Ioset. Vomax is limited internally to 40W / Ioset or 40W / (50% Iomax), whichever is less. The load should be chosen to satisfy Vomax = 12W / Ioset to achieve the specified output-current tolerance. For example, if Ioset=1.05A, the output-voltage operating range is 11.4–38.1V.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL 8750; 277Vac/ 60Hz
	-	-	0.70 mA	IEC 60598-1; 240Vac/ 60Hz
Input AC Current	-	-	0.55 A	Measured at 100% load and 100 Vac input.
	-	-	0.3 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	0.14 A ² s	At 220Vac input, 25°C Cold Start, Duration= 230 μs, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 50-60Hz, 60%-100%load (24-40W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes	
Output Current Tolerance	-5%Ioset	-	5%Ioset	At 100% load condition	
Output Current Setting(Ioset) Range					
	LUD-040S075DSF	150 mA	-	750 mA	
	LUD-040S150DSF	300 mA	-	1500 mA	

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Output Current Setting Range with Constant Power LUD-040S075DSF LUD-040S150DSF	350 mA 750 mA	- -	750 mA 1500 mA	
Total Output Current Ripple (pk-pk)	-	8%I _{omax}	15%I _{omax}	At 100% load condition. 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	1%I _{omax}	5%I _{omax}	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%I _{omax}	At 100% load condition
No Load Output Voltage LUD-040S075DSF LUD-040S150DSF	- -	- -	120 V 60 V	
Line Regulation	-	-	±1%	Measured at 100% load
Load Regulation	-	-	±5%	
Turn-on Delay Time	-	0.40 s	0.75 s	Measured at 120Vac input, 60%-100% Load
	-	0.40 s	0.50 s	Measured at 220Vac input, 60%-100% Load
Temperature Coefficient of I _o set	-	0.06%/°C	-	Case temperature = 0°C~T _c max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Return." When dimmed-to-OFF, auxiliary load changes ≥150mA should be limited to a maximum di/dt of 100A/s to keep V _{aux} in the specified range.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: LUD-040S075DSF LUD-040S150DSF				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 1.0% lower if measured immediately after startup.)
I _o = 350 mA	85.0%	87.0%	-	
I _o = 750 mA	83.0%	85.0%	-	
I _o = 750 mA I _o =1500 mA	85.0% 82.0%	87.0% 84.0%	- -	
Efficiency at 220 Vac input: LUD-040S075DSF LUD-040S150DSF				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 1.0% lower if measured immediately after startup.)
I _o = 350 mA	86.0%	88.0%	-	
I _o = 750 mA	84.0%	86.0%	-	
I _o = 750 mA I _o =1500 mA	86.0% 83.0%	88.0% 85.0%	- -	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: LUD-040S075DSF $I_o = 350\text{ mA}$ $I_o = 750\text{ mA}$ LUD-040S150DSF $I_o = 750\text{ mA}$ $I_o = 1500\text{ mA}$	85.0% 83.0%	87.0% 85.0%	- -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 1.0% lower if measured immediately after startup.)
	85.5% 82.5%	87.5% 84.5%	- -	
Standby Power	-	-	0.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	210,000 hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	96,000 hours	-	Measured at 120Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-30°C	-	+87°C	
Operating Case Temperature for Warranty Tc_w	-30°C	-	+70°C	Case temperature for 5 years warranty. Humidity: 10% RH to 90% RH; No condensation
Storage Temperature	-30°C	-	+85°C	Humidity: 5% RH to 95% RH No condensation
Dimensions Inches (L × W × H) Millimeters (L × W × H)	13.1 × 1.18 × 0.83 333 × 30 × 21			
Net Weight	-	300 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-20 V	-	20 V	
Source Current on Vdim (+)Pin	230 uA	380 uA	430 uA	Vdim(+) = 1 V
Dimming Output Range	LUD-040S075DSF LUD-040S150DSF	5%loset -	loset	350 mA ≤ loset ≤ 750 mA 750 mA ≤ loset ≤ 1500 mA
	LUD-040S075DSF LUD-040S150DSF	17.5 mA 37.5 mA	-	loset
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.35 V	0.5 V	0.65 V	
Dim on Voltage	0.55 V	0.7 V	0.85 V	
Hysteresis	-	0.2 V	-	

Dimming Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
PWM_in High Level	3 V	-	10 V	Dimming mode set to PWM in Inventronics Programming Software.
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	99%	
PWM Dimming off (Positive Logic)	2%	5%	8%	
PWM Dimming on (Positive Logic)	4%	7%	10%	
PWM Dimming off (Negative Logic)	92%	95%	98%	
PWM Dimming on (Negative Logic)	90%	93%	96%	
Hysteresis	-	2%	-	

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750,UL 1310,CAN/CSA-C22.2 No. 250.13,CAN/CSA-C22.2 No. 223-M91
ENEC & CE	EN 61347-1 ⁽¹⁾ , EN61347-2-13
UKCA	BS EN61347-1 ⁽¹⁾ , BS EN61347-2-13
CCC	GB 19510.1, GB 19510.14
CB	IEC 61347-1, IEC 61347-2-13
KS	KS C 7655
Performance	Standard
ENEC	EN 62384
EMI Standards	Notes
BS EN/EN IEC 55015/GB/T 17743 ⁽²⁾	Conducted emission Test & Radiated emission Test
BS EN/EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions Class C
BS EN/EN 61000-3-3	Voltage Fluctuations & Flicker
FCC Part 15 ⁽²⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.

Safety & EMC Compliance (Continued)


EMS Standards	Notes
BS EN/EN 61000-4-2	Electrostatic Discharge(ESD): 8 kV air discharge, 4 kV contact discharge
BS EN/EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
BS EN/EN 61000-4-4	Electrical Fast Transient/Burst-EFT
BS EN/EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 1 kV
BS EN/EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
BS EN/EN 61000-4-8	Power Frequency Magnetic Field Test
BS EN/EN 61000-4-11	Voltage Dips
BS EN/EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment

- Notes:** (1) This product meets all requirements for BS EN/EN 61347-1, Annex O (Double insulation). When the driver is energized, the allowed leakage current is perceptible but harmless.
 (2) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

Lifetime vs. Case Temperature

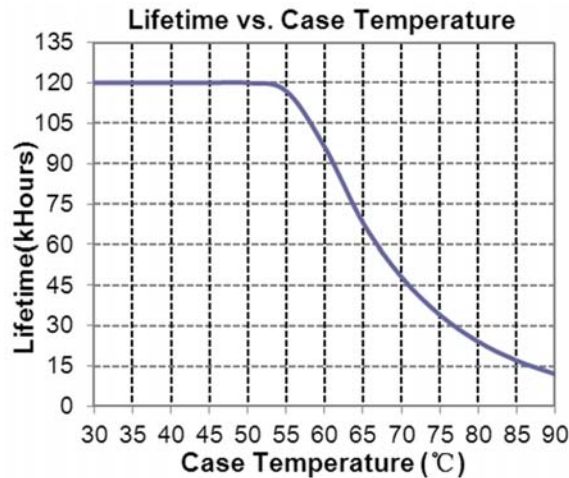


Inrush Current Waveform

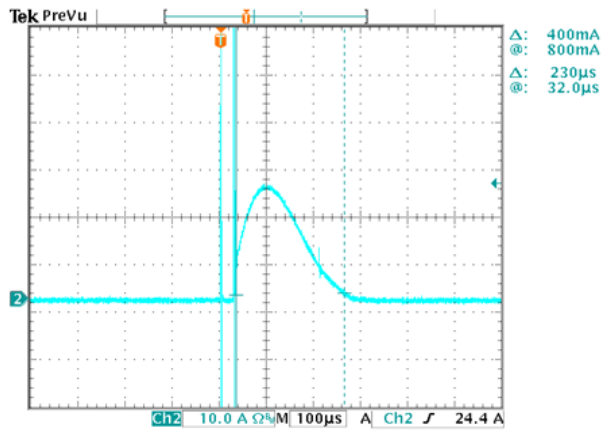


Efficiency vs. Load


LUD-040S075DSF($I_o=350mA$)
Efficiency vs. Output Voltage

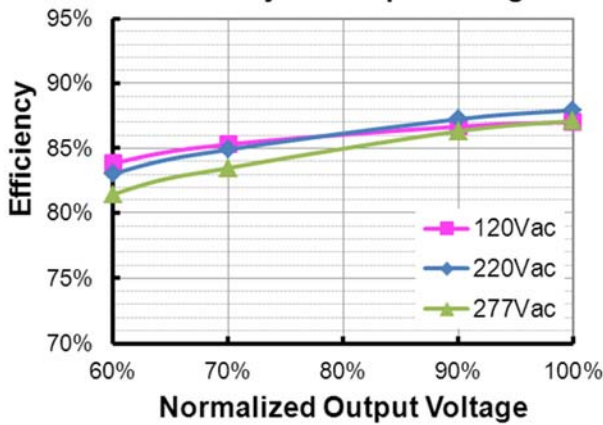


LUD-040S075DSF($I_o=750mA$)
Efficiency vs. Output Voltage

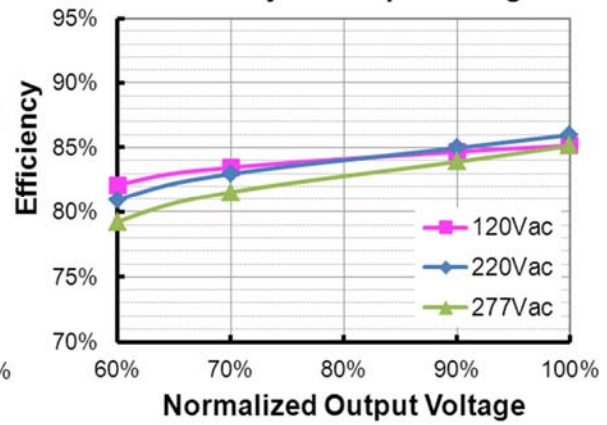


LUD-040S150DSF($I_o=750mA$)
Efficiency vs. Output Voltage

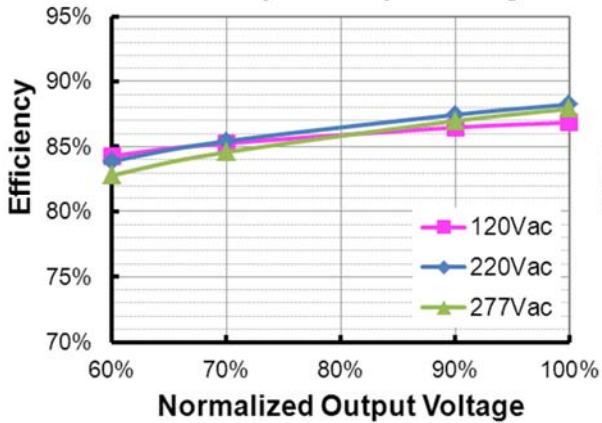



LUD-040S150DSF($I_o=1500mA$)
Efficiency vs. Output Voltage

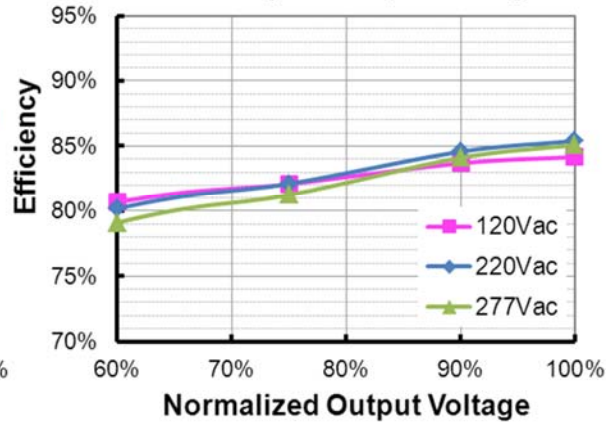

Power Factor

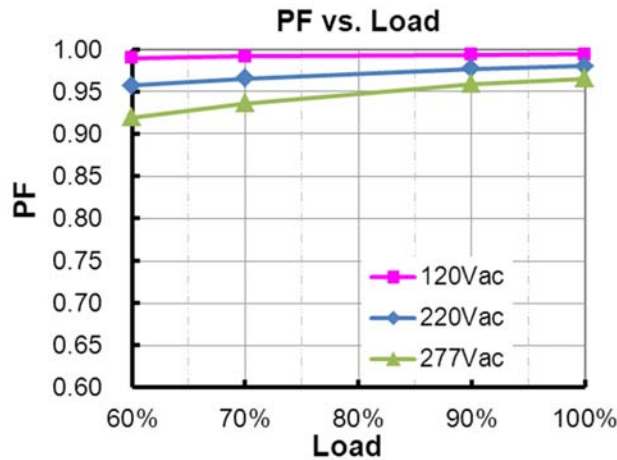

Total Harmonic Distortion

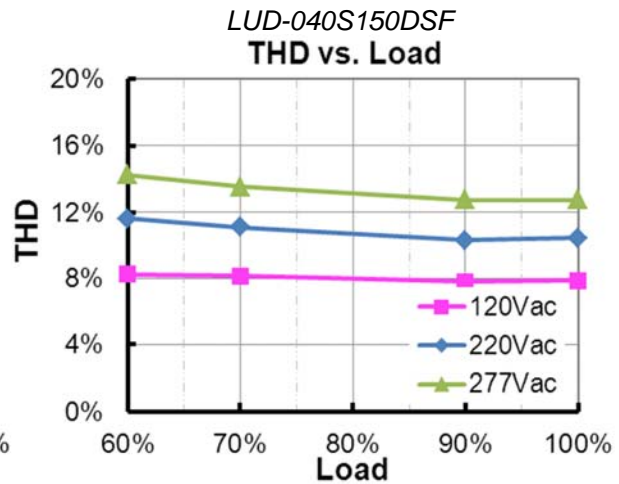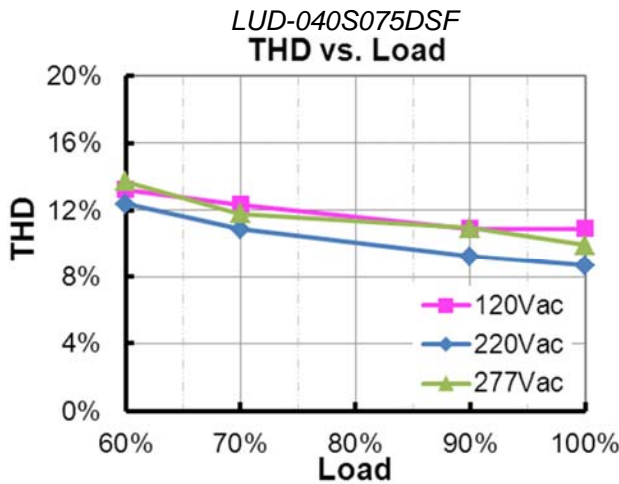


Protection Functions

Parameter	Min.	Typ.	Max.	Notes	
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.				
Short Circuit Protection	Auto Recovery. The power supply will shut off all of the output and restarts 1 minute later when output operates in a short circuit condition.				
Open Lamp Protection	Auto Recovery. The power supply will shut off all of the output and restart 1 minute later when output operates in an open lamp condition.				
External Thermal Protection NTC	R1	-	7.91 kOhm	-	When R_NTC falls below R1, External Thermal Protection is triggered, reducing output current until R2 is reached.
	R2	-	4.26 kOhm	-	When R_NTC is less than R2, output current is reduced to the programmed "Protection Current Floor."
	Protection Current Floor	5%loset	60%loset	100%loset	5%loset > lomin (default setting is 60%)
lomin		60%loset	100%loset	5%loset ≤ lomin (default setting is 60%)	


Dimming

● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

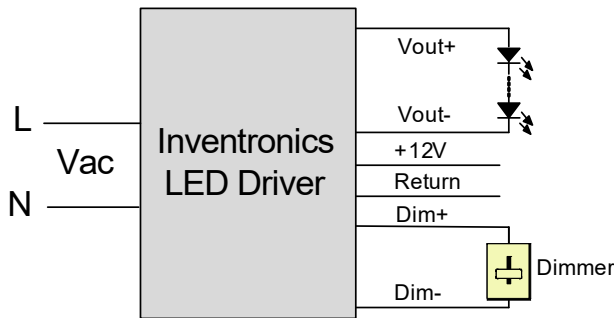


Implementation 1: DC Input

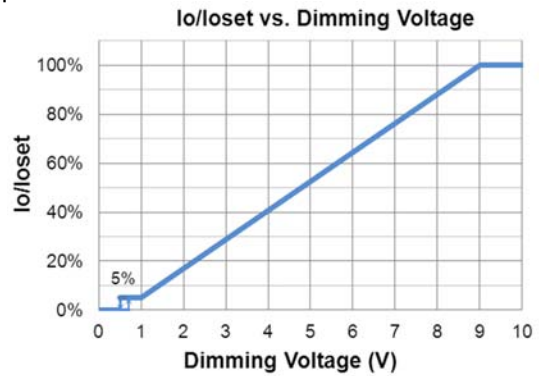



Notes:

1. Do NOT connect Dim- to the output Vout- or Vout+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.


● PWM Dimming

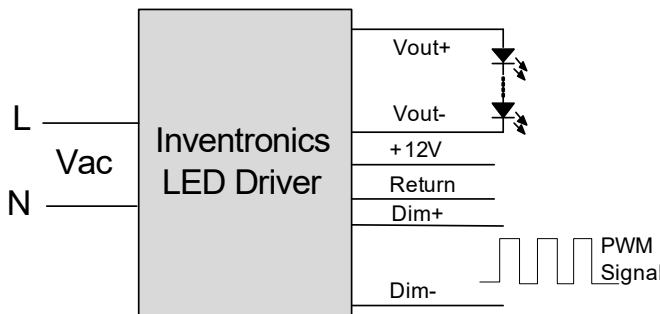

Implementation 2: Positive logic

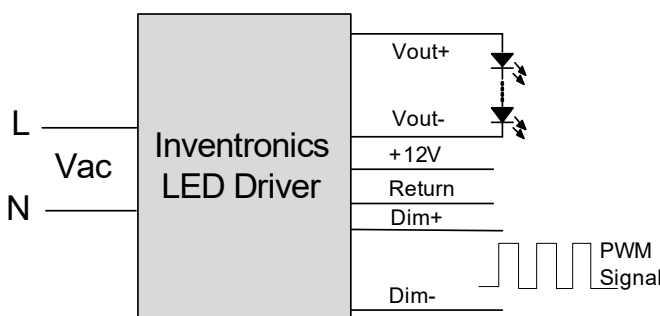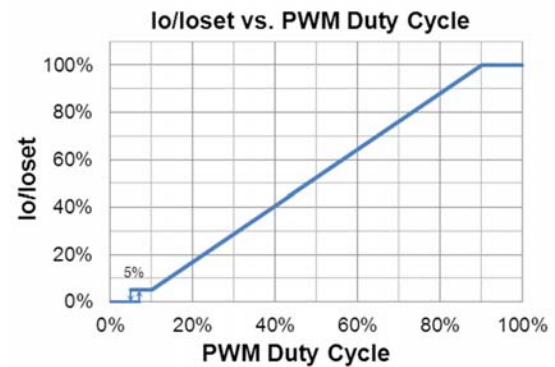

Implementation 3: Negative logic

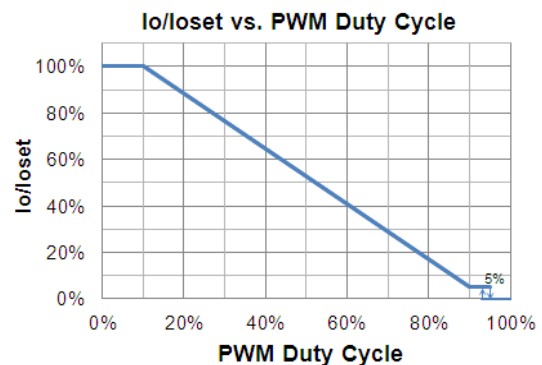

Notes:

1. Do NOT connect Dim- to the output Vout- or Vout+, otherwise the driver will not work properly.
2. When PWM negative logic dimming mode and Dim+ is open, the driver will dim to off and be standby.

● **Timing Dimming**


Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.


● **Output Lumen Compensation**

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

Wire Connection Diagram

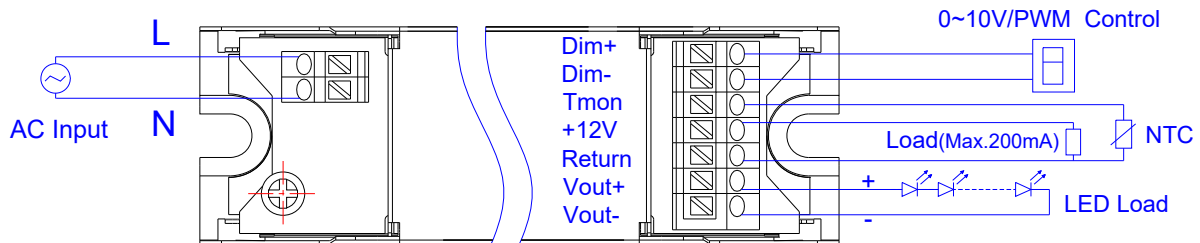



Programming Connection Diagram

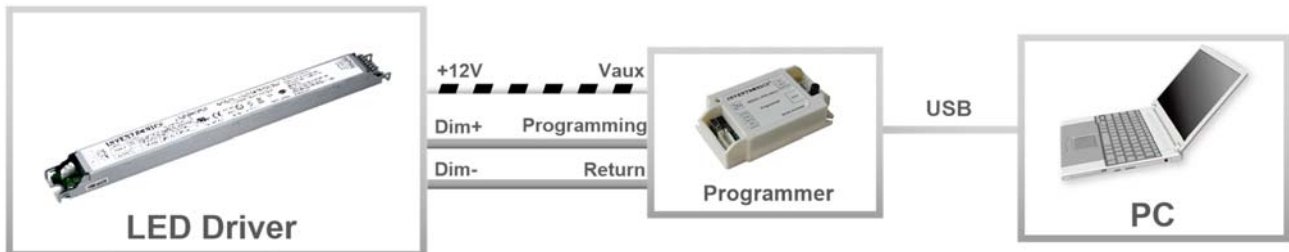

Note: The driver does not need to be powered on during the programming process.

- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline

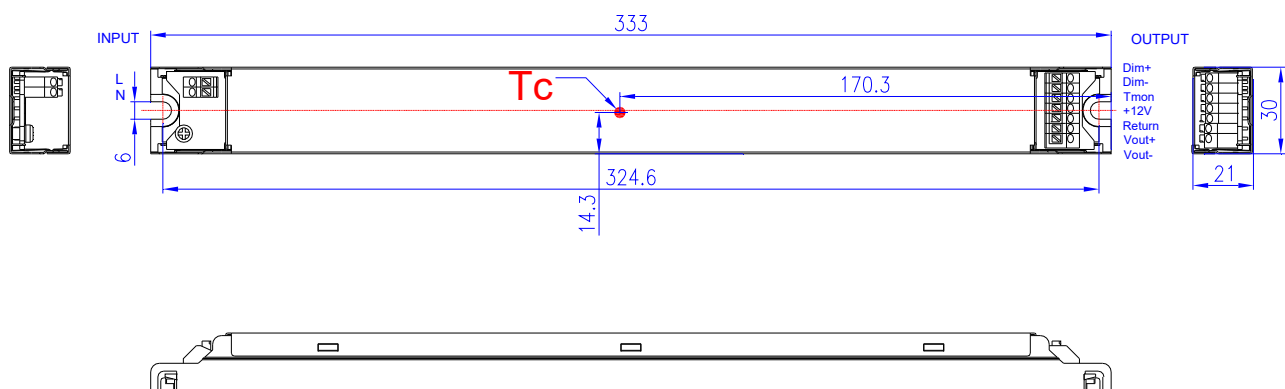

Unspecified tolerance: ±1

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-06-24	A	Datasheets Release	/	/
2015-08-03	B	Release LUD-040S075DSF	/	/
2016-02-25	C	KS Certificate	/	Added
		IP Rating	/	Added
		Note of EMI Standards	/	Added
2016-09-20	D	Load Regulation	±3%	±5%
2017-05-25	E	Turn-on Delay Time at 120Vac	Max.=1.0 s	Max.=0.75 s
2018-11-09	F	Safety certification logo	/	Updated
		Features	Class P, UL Listed Versions Available (See Note 5)	Added
		Features	5 Years Warranty	Added
		Models	(5) For UL Listed Class P models add suffix - 00C0 (certified input voltage range: 120-277Vac or 127-250Vdc).	Added
		Note of Operating Case Temperature for Warranty Tc_w	/	Updated
		Safety & EMC Compliance	/	Updated
		Link in the datasheet	/	Updated
2019-1-31	G	Features	Dimmable to 5% by 0-10V/PWM/Timer (3 Timer Modes)	0-10V/PWM/3 Timer-Modes Dimmable
		PSE certificate	/	Added
		Notes of Models	(2) UL, FCC certified input voltage range: 100-277 Vac or 127-300 Vdc; other certified input voltage range except UL & FCC: 100-240 Vac, or 127-250 Vdc (except CCC)	(2) UL, FCC certified input voltage range: 100-277 Vac or 127-300 Vdc; other certified input voltage range except UL & FCC: 100-240 Vac, or 127-250 Vdc (except PSE, CCC and KS).
		Standards Compliance	/	Updated
2023-05-24	H	UKCA logo	/	Added
		PSE logo	/	Deleted
		Safety & EMC Compliance	/	Updated
		Dimming	/	Updated
		Programming Connection Diagram	/	Updated

Revision History (Continued)

Change Date	Rev.	Description of Change		
		Item	From	To
2023-05-24	H	RoHS Compliance	/	Updated