


Features

- Easy connect to programmer PRG-MUL2
- LED indicator for programming status
- Long life push button for mass programming application
- Optional Built-in buzzer for programming status



Description


The PRG-CASE2 is a mass programming tool designed for PRG-MUL2. It contains a green and red LED indicator, a programming push button, and a buzzer. PRG-MUL2 can easily be installed inside the CASE using the 3 provided plug-in cables, then the CASE can be mounted to a flat surface by the mounting holes.

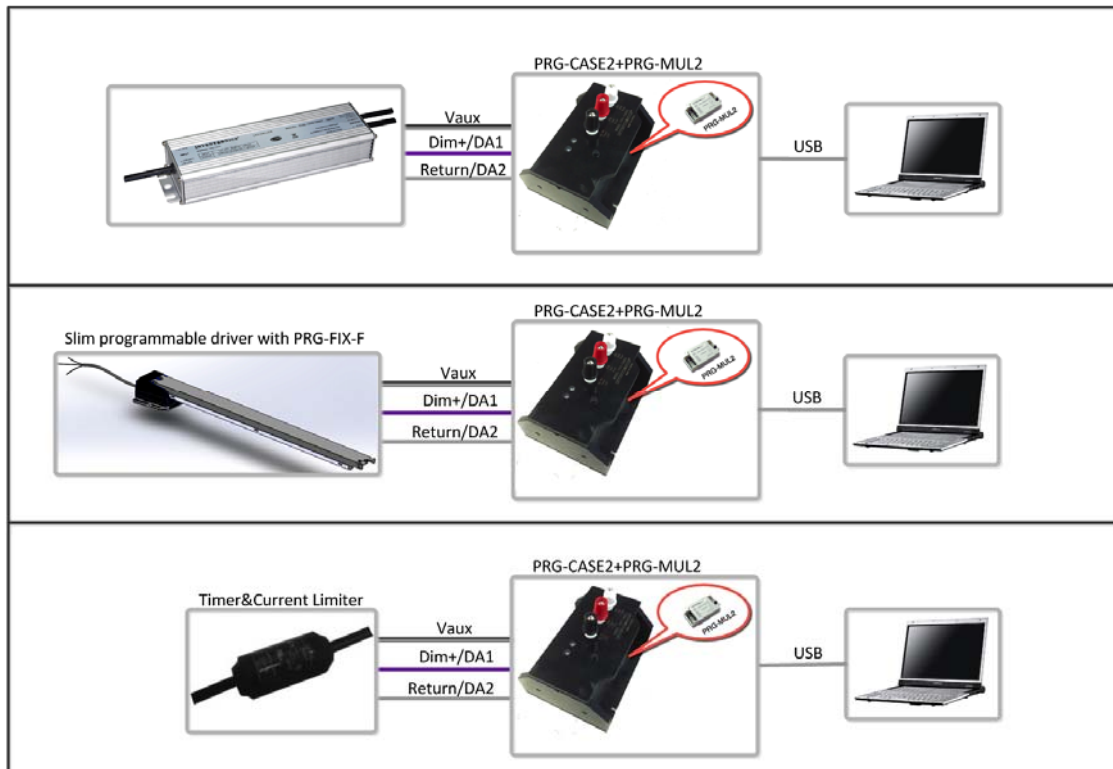

Quick Installation

1. Mount the PRG-MUL2 into the PRG-CASE2 with the provided screws.
2. Connect the USB cable to the PRG-MUL2.
3. Connect the cable number 2 to the PRG-MUL2.
4. Connect the cable number 3 to slot besides the push button in PRG-MUL2.
5. Close the cover and connect the USB to PC or a USB charger to start the programming.

Note: Before you start Off-line programming, please ensure you have already set the programmer to Off-line mode by Inventronics programming GUI.

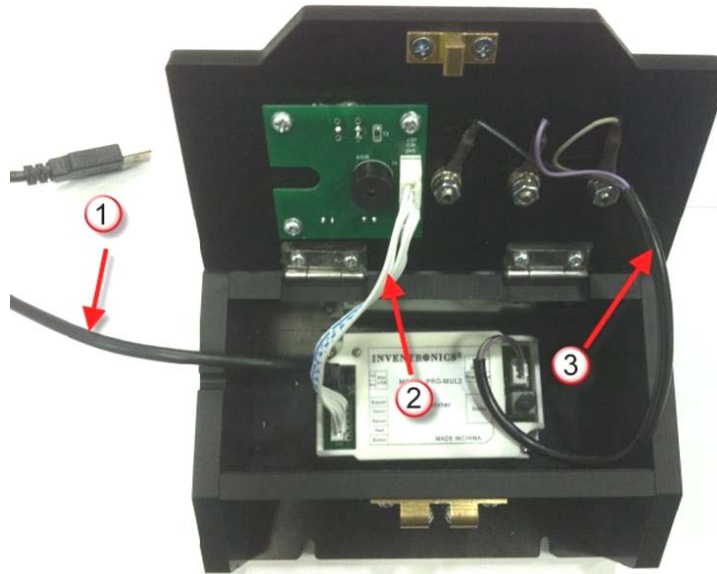

Model

Name	Description	Part Number
Programming Fixture	For mass programming Application	PRG-CASE2

Environmental Specifications

Parameters	Min	Typ.	Max	Note
Operating temperature	-20°C	-	+50°C	Humidity: 10%RH to 90%RH. No condensation.
Storage temperature	-40°C	-	+70°C	Humidity: 5%RH to 90%RH. No condensation.

General Specifications


Parameter	Min.	Typ.	Max.	Notes
Dimensions Inches (L x W x H) Millimeters (L x W x H)	5.9 x 4.72 x 4.19 150 x 120 x 106.5			
Net Weight	-	752 g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

Packing List

Packing List	Function
PRG-CASE2	Mass programming tool.
6 Pin Plug-in Cable	Connects programmer and PCB(Led indicator, Buzzer, Button)
3 Pin Plug-in Cable	Connects programmer and programming terminals.

Mechanical Outline

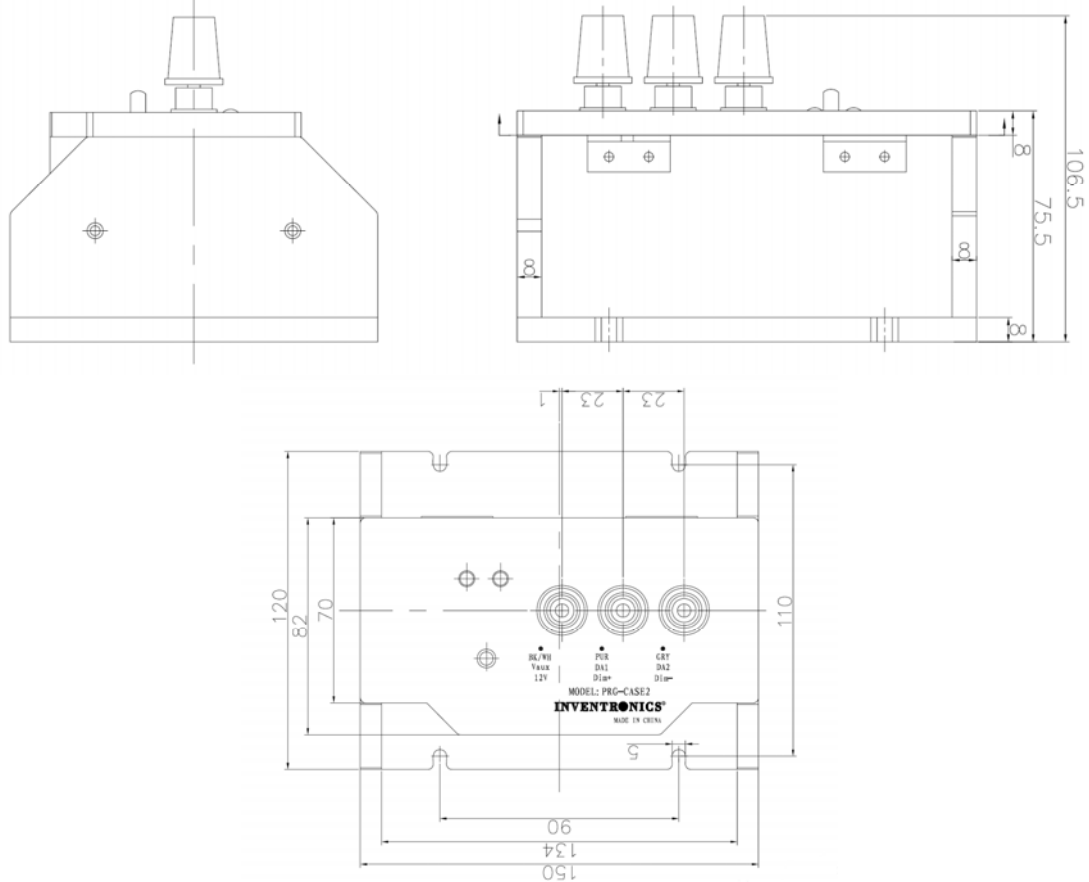

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-05-06	A		/	/